

ISC2

Exam Questions SSCP

System Security Certified Practitioner (SSCP)



NEW QUESTION 1

- (Topic 1)

The Terminal Access Controller Access Control System (TACACS) employs which of the following?

- A. a user ID and static password for network access
- B. a user ID and dynamic password for network access
- C. a user ID and symmetric password for network access
- D. a user ID and asymmetric password for network access

Answer: A

Explanation:

For networked applications, the Terminal Access Controller Access Control System (TACACS) employs a user ID and a static password for network access.
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 44.

NEW QUESTION 2

- (Topic 1)

The type of discretionary access control (DAC) that is based on an individual's identity is also called:

- A. Identity-based Access control
- B. Rule-based Access control
- C. Non-Discretionary Access Control
- D. Lattice-based Access control

Answer: A

Explanation:

An identity-based access control is a type of Discretionary Access Control (DAC) that is based on an individual's identity. DAC is good for low level security environment. The owner of the file decides who has access to the file. If a user creates a file, he is the owner of that file. An identifier for this user is placed in the file header and/or in an access control matrix within the operating system. Ownership might also be granted to a specific individual. For example, a manager for a certain department might be made the owner of the files and resources within her department. A system that uses discretionary access control (DAC) enables the owner of the resource to specify which subjects can access specific resources. This model is called discretionary because the control of access is based on the discretion of the owner. Many times department managers, or business unit managers, are the owners of the data within their specific department. Being the owner, they can specify who should have access and who should not. Reference(s) used for this question:
Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 220). McGraw- Hill . Kindle Edition.

NEW QUESTION 3

- (Topic 1)

Controlling access to information systems and associated networks is necessary for the preservation of their:

- A. Authenticity, confidentiality and availability
- B. Confidentiality, integrity, and availability.
- C. integrity and availability.
- D. authenticity, confidentiality, integrity and availability.

Answer: B

Explanation:

Controlling access to information systems and associated networks is necessary for the preservation of their confidentiality, integrity and availability.
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 31.

NEW QUESTION 4

- (Topic 1)

Physical security is accomplished through proper facility construction, fire and water protection, anti-theft mechanisms, intrusion detection systems, and security procedures that are adhered to and enforced. Which of the following is not a component that achieves this type of security?

- A. Administrative control mechanisms
- B. Integrity control mechanisms
- C. Technical control mechanisms
- D. Physical control mechanisms

Answer: B

Explanation:

Integrity Controls Mechanisms are not part of physical security. All of the other detractors were correct this one was the wrong one that does not belong to Physical Security. Below you have more details extracted from the SearchSecurity web site: Information security depends on the security and management of the physical space in which computer systems operate. Domain 9 of the CISSP exam's Common Body of Knowledge addresses the challenges of securing the physical space, its systems and the people who work within it by use of administrative, technical and physical controls. The following QUESTION NO: s are covered:
Facilities management: The administrative processes that govern the maintenance and protection of the physical operations space, from site selection through emergency response.
Risks, issues and protection strategies: Risk identification and the selection of security protection components.
Perimeter security: Typical physical protection controls.
Facilities management

Facilities management is a complex component of corporate security that ranges from the planning of a secure physical site to the management of the physical information system environment. Facilities management responsibilities include site selection and physical security planning (i.e. facility construction, design and layout, fire and water damage protection, antitheft mechanisms, intrusion detection and security procedures.) Protections must extend to both people and assets. The necessary level of protection depends on the value of the assets and data. CISSP® candidates must learn the concept of critical-path analysis as a means of determining a component's business function criticality relative to the cost of operation and replacement. Furthermore, students need to gain an understanding of the optimal location and physical attributes of a secure facility. Among the QUESTION NO: s covered in this domain are site inspection, location, accessibility and obscurity, considering the area crime rate, and the likelihood of natural hazards such as floods or earthquakes.

This domain also covers the quality of construction material, such as its protective qualities and load capabilities, as well as how to lay out the structure to minimize risk of forcible entry and accidental damage. Regulatory compliance is also touched on, as is preferred proximity to civil protection services, such as fire and police stations. Attention is given to computer and equipment rooms, including their location, configuration (entrance/egress requirements) and their proximity to wiring distribution centers at the site.

Physical risks, issues and protection strategies

An overview of physical security risks includes risk of theft, service interruption, physical damage, compromised system integrity and unauthorized disclosure of information. Interruptions to business can manifest due to loss of power, services, telecommunications connectivity and water supply. These can also seriously compromise electronic security monitoring alarm/response devices. Backup options are also covered in this domain, as is a strategy for quantifying the risk exposure by simple formula.

Investment in preventive security can be costly. Appropriate redundancy of people skills, systems and infrastructure must be based on the criticality of the data and assets to be preserved. Therefore a strategy is presented that helps determine the selection of cost appropriate controls. Among the QUESTION NO: s covered in this domain are regulatory and legal requirements, common standard security protections such as locks and fences, and the importance of establishing service level agreements for maintenance and disaster support. Rounding out the optimization approach are simple calculations for determining mean time between failure and mean time to repair (used to estimate average equipment life expectancy) ?? essential for estimating the cost/benefit of purchasing and maintaining redundant equipment.

As the lifeblood of computer systems, special attention is placed on adequacy, quality and protection of power supplies. CISSP candidates need to understand power supply concepts and terminology, including those for quality (i.e. transient noise vs. clean power); types of interference (EMI and RFI); and types of interruptions such as power excess by spikes and surges, power loss by fault or blackout, and power degradation from sags and brownouts. A simple formula is presented for determining the total cost per hour for backup power. Proving power reliability through testing is recommended and the advantages of three power protection approaches are discussed (standby UPS, power line conditioners and backup sources) including minimum requirements for primary and alternate power provided.

Environmental controls are explored in this domain, including the value of positive pressure water drains and climate monitoring devices used to control temperature, humidity and reduce static electricity. Optimal temperatures and humidity settings are provided.

Recommendations include strict procedures during emergencies, preventing typical risks (such as blocked fans), and the use of antistatic armbands and hygrometers. Positive pressurization for proper ventilation and monitoring for air born contaminants is stressed.

The pros and cons of several detection response systems are deeply explored in this domain. The concept of combustion, the classes of fire and fire extinguisher ratings are detailed. Mechanisms behind smoke-activated, heat-activated and flame-activated devices and Automatic Dial-up alarms are covered, along with their advantages, costs and shortcomings. Types of fire sources are distinguished and the effectiveness of fire suppression methods for each is included. For instance, Halon and its approved replacements are covered, as are the advantages and the inherent risks to equipment of the use of water sprinklers.

Administrative controls

The physical security domain also deals with administrative controls applied to physical sites and assets. The need for skilled personnel, knowledge sharing between them, separation of duties, and appropriate oversight in the care and maintenance of equipment and environments is stressed. A list of management duties including hiring checks, employee maintenance activities and recommended termination procedures is offered. Emergency measures include accountability for evacuation and system shutdown procedures, integration with disaster and business continuity plans, assuring documented procedures are easily available during different types of emergencies, the scheduling of periodic equipment testing, administrative reviews of documentation, procedures and recovery plans, responsibilities delegation, and personnel training and drills.

Perimeter security

Domain nine also covers the devices and techniques used to control access to a space. These include access control devices, surveillance monitoring, intrusion detection and corrective actions. Specifications are provided for optimal external boundary protection, including fence heights and placement, and lighting placement and types. Selection of door types and lock characteristics are covered. Surveillance methods and intrusion-detection methods are explained, including the use of video monitoring, guards, dogs, proximity detection systems, photoelectric/photometric systems, wave pattern devices, passive infrared systems, and sound and motion detectors, and current flow sensitivity devices that specifically address computer theft. Room lock types ?? both preset and cipher locks (and their variations) -- device locks, such as portable laptop locks, lockable server bays, switch control locks and slot locks, port controls, peripheral switch controls and cable trap locks are also covered. Personal access control methods used to identify authorized users for site entry are covered at length, noting social engineering risks such as piggybacking. Wireless proximity devices, both user access and system sensing readers are covered (i.e. transponder based, passive devices and field powered devices) in this domain.

Now that you've been introduced to the key concepts of Domain 9, watch the Domain 9, Physical Security video

Return to the CISSP Essentials Security School main page

See all SearchSecurity.com's resources on CISSP certification training Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 280.

NEW QUESTION 5

- (Topic 1)

What is the main concern with single sign-on?

- A. Maximum unauthorized access would be possible if a password is disclosed.
- B. The security administrator's workload would increase.
- C. The users' password would be too hard to remember.
- D. User access rights would be increased.

Answer: A

Explanation:

A major concern with Single Sign-On (SSO) is that if a user's ID and password are compromised, the intruder would have access to all the systems that the user was authorized for.

The following answers are incorrect:

The security administrator's workload would increase. Is incorrect because the security administrator's workload would decrease and not increase. The admin would not be responsible for maintaining multiple user accounts just the one.

The users' password would be too hard to remember. Is incorrect because the users would have less passwords to remember.

User access rights would be increased. Is incorrect because the user access rights would not be any different than if they had to log into systems manually.

NEW QUESTION 6

- (Topic 1)

Crime Prevention Through Environmental Design (CPTED) is a discipline that:

- A. Outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior.
- B. Outlines how the proper design of the logical environment can reduce crime by directly affecting human behavior.
- C. Outlines how the proper design of the detective control environment can reduce crime by directly affecting human behavior.
- D. Outlines how the proper design of the administrative control environment can reduce crime by directly affecting human behavior.

Answer: A

Explanation:

Crime Prevention Through Environmental Design (CPTED) is a discipline that outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior. It provides guidance about lost and crime prevention through proper facility construction and environmental components and procedures.

CPTED concepts were developed in the 1960s. They have been expanded upon and have matured as our environments and crime types have evolved. CPTED has been used not just to develop corporate physical security programs, but also for large-scale activities such as development of neighborhoods, towns, and cities. It addresses landscaping, entrances, facility and neighborhood layouts, lighting, road placement, and traffic circulation patterns. It looks at microenvironments, such as offices and rest-rooms, and macroenvironments, like campuses and cities.

Reference(s) used for this question:

Harris, Shon (2012-10-18). *CISSP All-in-One Exam Guide, 6th Edition* (p. 435). McGraw- Hill. Kindle Edition.
 and
 CPTED Guide Book

NEW QUESTION 7

- (Topic 1)

Which of the following is most affected by denial-of-service (DOS) attacks?

- A. Confidentiality
- B. Integrity
- C. Accountability
- D. Availability

Answer: D

Explanation:

Denial of service attacks obviously affect availability of targeted systems. Source: KRUTZ, Ronald L. & VINES, Russel D., *The CISSP Prep Guide: Mastering the Ten Domains of Computer Security*, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 61).

NEW QUESTION 8

- (Topic 1)

Which of the following would be used to implement Mandatory Access Control (MAC)?

- A. Clark-Wilson Access Control
- B. Role-based access control
- C. Lattice-based access control
- D. User dictated access control

Answer: C

Explanation:

The lattice is a mechanism use to implement Mandatory Access Control (MAC)

Under Mandatory Access Control (MAC) you have: Mandatory Access Control

Under Non Discretionary Access Control (NDAC) you have: Rule-Based Access Control
 Role-Based Access Control

Under Discretionary Access Control (DAC) you have: Discretionary Access Control

The Lattice Based Access Control is a type of access control used to implement other access control method. A lattice is an ordered list of elements that has a least upper bound and a most lower bound. The lattice can be used for MAC, DAC, Integrity level, File Permission, and more

For example in the case of MAC, if we look at common government classifications, we have the following:

TOP SECRET

SECRET -----I am the user at secret CONFIDENTIAL

SENSITIVE BUT UNCLASSIFIED UNCLASSIFIED

If you look at the diagram above where I am a user at SECRET it means that I can access document at lower classification but not document at TOP SECRET.

The lattice is a list of ORDERED ELEMENT, in this case the ordered elements are classification levels. My least upper bound is SECRET and my most lower bound is UNCLASSIFIED.

However the lattice could also be used for Integrity Levels such as: VERY HIGH

HIGH

MEDIUM -----I am a user, process, application at the medium level LOW

VERY LOW

In the case of of Integrity levels you have to think about TRUST. Of course if I take for example the the VISTA operating system which is based on Biba then

Integrity Levels would be used. As a user having access to the system I cannot tell a process running with administrative privilege what to do. Else any users on the system could take control of the system by getting highly privilege process to do things on their behalf. So no read down would be allowed in this case and this is an example of the Biba model.

Last but not least the lattice could be use for file permissions: RWX

RW -----User at this level

R

If I am a user with READ and WRITE (RW) access privilege then I cannot execute the file

because I do not have execute permission which is the X under linux and UNIX.

Many people confuse the Lattice Model and many books says MAC = LATTICE, however the lattice can be use for other purposes.

There is also Role Based Access Control (RBAC) that exists out there. It COULD be used to simulate MAC but it is not MAC as it does not make use of Label on objects indicating sensitivity and categories. MAC also require a clearance that dominates the object.

You can get more info about RBAC at:<http://csrc.nist.gov/groups/SNS/rbac/faq.html#03> Also note that many book uses the same acronym for Role Based Access Control and Rule

Based Access Control which is RBAC, this can be confusing.

The proper way of writing the acronym for Rule Based Access Control is RuBAC, unfortunately it is not commonly used.

References:

There is a great article on technet that talks about the lattice in VISTA: <http://blogs.technet.com/b/steriley/archive/2006/07/21/442870.aspx>

also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

and

http://www.microsoft-watch.com/content/vista/gaging_vistas_integrity.html

NEW QUESTION 9

- (Topic 1)

Which of the following is a trusted, third party authentication protocol that was developed under Project Athena at MIT?

- A. Kerberos
- B. SESAME
- C. KryptoKnight
- D. NetSP

Answer: A

Explanation:

Kerberos is a trusted, third party authentication protocol that was developed under Project Athena at MIT.

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. A free implementation of this protocol is available from the Massachusetts Institute of Technology. Kerberos is available in many commercial products as well.

The Internet is an insecure place. Many of the protocols used in the Internet do not provide any security. Tools to "sniff" passwords off of the network are in common use by systems crackers. Thus, applications which send an unencrypted password over the network are extremely vulnerable. Worse yet, other client/server applications rely on the client program to be "honest" about the identity of the user who is using it. Other applications rely on the client to restrict its activities to those which it is allowed to do, with no other enforcement by the server.

Some sites attempt to use firewalls to solve their network security problems. Unfortunately, firewalls assume that "the bad guys" are on the outside, which is often a very bad

assumption. Most of the really damaging incidents of computer crime are carried out by insiders. Firewalls also have a significant disadvantage in that they restrict how your users can use the Internet. (After all, firewalls are simply a less extreme example of the dictum that there is nothing more secure than a computer which is not connected to the network --- and powered off!) In many places, these restrictions are simply unrealistic and unacceptable.

Kerberos was created by MIT as a solution to these network security problems. The Kerberos protocol uses strong cryptography so that a client can prove its identity to a server (and vice versa) across an insecure network connection. After a client and server have used Kerberos to prove their identity, they can also encrypt all of their communications to assure privacy and data integrity as they go about their business.

Kerberos is freely available from MIT, under a copyright permission notice very similar to the one used for the BSD operating and X11 Windowing system. MIT provides Kerberos in source form, so that anyone who wishes to use it may look over the code for themselves and assure themselves that the code is trustworthy. In addition, for those who prefer to rely on a professional supported product, Kerberos is available as a product from many different vendors.

In summary, Kerberos is a solution to your network security problems. It provides the tools of authentication and strong cryptography over the network to help you secure your information systems across your entire enterprise. We hope you find Kerberos as useful as it has been to us. At MIT, Kerberos has been invaluable to our Information/Technology architecture.

KryptoKnight is a Peer to Peer authentication protocol incorporated into the NetSP product from IBM.

SESAME is an authentication and access control protocol, that also supports communication confidentiality and integrity. It provides public key based authentication along with the Kerberos style authentication, that uses symmetric key cryptography. Sesame supports the Kerberos protocol and adds some security extensions like public key based authentication and an ECMA-style Privilege Attribute Service. The complete Sesame protocol is a two step process. In the first step, the client successfully authenticates itself to the Authentication Server and obtains a ticket that can be presented to the Privilege Attribute Server. In the second step, the initiator obtains proof of his access rights in the form of Privilege Attributes Certificate (PAC). The PAC is a specific form of Access Control Certificate as defined in the ECMA-219 document. This document describes the extensions to Kerberos for public key based authentication as adopted in Sesame. SESAME, KryptoKnight, and NetSP never took off and the protocols are no longer commonly used.

References:

<http://www.cmf.nrl.navy.mil/CCS/people/kenh/kerberos-faq.html#whatis> and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

NEW QUESTION 10

- (Topic 1)

Which of the following is an example of a passive attack?

- A. Denying services to legitimate users
- B. Shoulder surfing
- C. Brute-force password cracking
- D. Smurfing

Answer: B

Explanation:

Shoulder surfing is a form of a passive attack involving stealing passwords, personal identification numbers or other confidential information by looking over someone's shoulder. All other forms of attack are active attacks, where a threat makes a modification to the system in an attempt to take advantage of a vulnerability.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, chapter 3: Security Management Practices (page 63).

NEW QUESTION 10

- (Topic 1)

In the Bell-LaPadula model, the Star-property is also called:

- A. The simple security property
- B. The confidentiality property
- C. The confinement property
- D. The tranquility property

Answer: B

Explanation:

The Bell-LaPadula model focuses on data confidentiality and access to classified information, in contrast to the Biba Integrity Model which describes rules for the protection of data integrity.

In this formal model, the entities in an information system are divided into subjects and objects.

The notion of a "secure state" is defined, and it is proven that each state transition preserves security by moving from secure state to secure state, thereby proving that the system satisfies the security objectives of the model.

The Bell-LaPadula model is built on the concept of a state machine with a set of allowable states in a system. The transition from one state to another state is defined by transition functions.

A system state is defined to be "secure" if the only permitted access modes of subjects to objects are in accordance with a security policy.

To determine whether a specific access mode is allowed, the clearance of a subject is compared to the classification of the object (more precisely, to the combination of classification and set of compartments, making up the security level) to determine if the subject is authorized for the specific access mode.

The clearance/classification scheme is expressed in terms of a lattice. The model defines two mandatory access control (MAC) rules and one discretionary access control (DAC) rule with three security properties:

The Simple Security Property - a subject at a given security level may not read an object at a higher security level (no read-up).

The property (read "star"-property) - a subject at a given security level must not write to any object at a lower security level (no write-down). The property is also known as the Confinement property.

The Discretionary Security Property - use an access control matrix to specify the discretionary access control.

The transfer of information from a high-sensitivity document to a lower-sensitivity document may happen in the Bell-LaPadula model via the concept of trusted subjects. Trusted Subjects are not restricted by the property. Untrusted subjects are.

Trusted Subjects must be shown to be trustworthy with regard to the security policy. This security model is directed toward access control and is characterized by the phrase: "no read up, no write down." Compare the Biba model, the Clark-Wilson model and the Chinese Wall.

With Bell-LaPadula, users can create content only at or above their own security level (i.e. secret researchers can create secret or top-secret files but may not create public files; no write-down). Conversely, users can view content only at or below their own security level (i.e. secret researchers can view public or secret files, but may not view top-secret files; no read-up).

Strong Property

The Strong Property is an alternative to the Property in which subjects may write to objects with only a matching security level. Thus, the write-up operation permitted in the usual Property is not present, only a write-to-same level operation. The Strong Property is usually discussed in the context of multilevel database management systems and is motivated by integrity concerns.

Tranquility principle

The tranquility principle of the Bell-LaPadula model states that the classification of a subject or object does not change while it is being referenced. There are two forms to the tranquility principle: the "principle of strong tranquility" states that security levels do not change during the normal operation of the system and the "principle of weak tranquility" states that security levels do not change in a way that violates the rules of a given security policy.

Another interpretation of the tranquility principles is that they both apply only to the period of time during which an operation involving an object or subject is occurring. That is, the strong tranquility principle means that an object's security level/label will not change during an operation (such as read or write); the weak tranquility principle means that an object's security level/label may change in a way that does not violate the security policy during an operation.

Reference(s) used for this question: http://en.wikipedia.org/wiki/Biba_Model

http://en.wikipedia.org/wiki/Mandatory_access_control http://en.wikipedia.org/wiki/Discretionary_access_control http://en.wikipedia.org/wiki/Clark-Wilson_model

http://en.wikipedia.org/wiki/Brewer_and_Nash_model

NEW QUESTION 11

- (Topic 1)

In which of the following model are Subjects and Objects identified and the permissions applied to each subject/object combination are specified. Such a model can be used to quickly summarize what permissions a subject has for various system objects.

- A. Access Control Matrix model
- B. Take-Grant model
- C. Bell-LaPadula model
- D. Biba model

Answer: A

Explanation:

An access control matrix is a table of subjects and objects indicating what actions individual subjects can take upon individual objects. Matrices are data structures that programmers implement as table lookups that will be used and enforced by the operating system.

This type of access control is usually an attribute of DAC models. The access rights can be assigned directly to the subjects (capabilities) or to the objects (ACLs).
Capability Table

A capability table specifies the access rights a certain subject possesses pertaining to specific objects. A capability table is different from an ACL because the subject is bound to the capability table, whereas the object is bound to the ACL.

Access control lists (ACLs)

ACLs are used in several operating systems, applications, and router configurations. They are lists of subjects that are authorized to access a specific object, and they define what level of authorization is granted. Authorization can be specific to an individual, group, or role. ACLs map values from the access control matrix to the object.

Whereas a capability corresponds to a row in the access control matrix, the ACL corresponds to a column of the matrix.

NOTE: Ensure you are familiar with the terms Capability and ACLs for the purpose of the exam.

Resource(s) used for this question:

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 5264-5267). McGraw-Hill. Kindle Edition.

or

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition, Page 229 and

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 1923-1925). Auerbach Publications. Kindle Edition.

NEW QUESTION 16

- (Topic 1)

In biometrics, the "one-to-one" search used to verify claim to an identity made by a person is considered:

- A. Authentication
- B. Identification
- C. Auditing
- D. Authorization

Answer: A

Explanation:

Biometric devices can be use for either IDENTIFICATION or AUTHENTICATION

ONE TO ONE is for AUTHENTICATION

This means that you as a user would provide some biometric credential such as your fingerprint. Then they will compare the template that you have provided with the one stored in the Database. If the two are exactly the same that prove that you are who you pretend to be.

ONE TO MANY is for IDENTIFICATION

A good example of this would be within airport. Many airports today have facial recognition cameras, as you walk through the airport it will take a picture of your face and then compare the template (your face) with a database full of templates and see if there is a match between your template and the ones stored in the Database. This is for IDENTIFICATION of a person.

Some additional clarification or comments that might be helpful are: Biometrics establish authentication using specific information and comparing results to expected data. It does not perform well for identification purposes such as scanning for a person's face in a moving crowd for example.

Identification methods could include: username, user ID, account number, PIN, certificate, token, smart card, biometric device or badge.

Auditing is a process of logging or tracking what was done after the identity and authentication process is completed.

Authorization is the rights the subject is given and is performed after the identity is established.

Reference OIG (2007) p148, 167

Authentication in biometrics is a "one-to-one" search to verify claim to an identity made by a person.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 17

- (Topic 1)

The number of violations that will be accepted or forgiven before a violation record is produced is called which of the following?

- A. clipping level
- B. acceptance level
- C. forgiveness level
- D. logging level

Answer: A

Explanation:

The correct answer is "clipping level". This is the point at which a system decides to take some sort of action when an action repeats a preset number of times. That action may be to log the activity, lock a user account, temporarily close a port, etc.

Example: The most classic example of a clipping level is failed login attempts. If you have a system configured to lock a user's account after three failed login attempts, that is the "clipping level".

The other answers are not correct because:

Acceptance level, forgiveness level, and logging level are nonsensical terms that do not exist (to my knowledge) within network security.

Reference:

Official ISC2 Guide - The term "clipping level" is not in the glossary or index of that book. I cannot find it in the text either. However, I'm quite certain that it would be considered part of the CBK, despite its exclusion from the Official Guide.

All in One Third Edition page: 136 - 137

NEW QUESTION 20

- (Topic 1)

Controls to keep password sniffing attacks from compromising computer systems include which of the following?

- A. static and recurring passwords.
- B. encryption and recurring passwords.
- C. one-time passwords and encryption.
- D. static and one-time passwords.

Answer: C

Explanation:

To minimize the chance of passwords being captured one-time passwords would prevent a password sniffing attack because once used it is no longer valid. Encryption will also minimize these types of attacks.

The following answers are correct:

static and recurring passwords. This is incorrect because if there is no encryption then someone password sniffing would be able to capture the password much easier if it never changed.

encryption and recurring passwords. This is incorrect because while encryption helps, recurring passwords do nothing to minimize the risk of passwords being captured.

static and one-time passwords. This is incorrect because while one-time passwords will prevent these types of attacks, static passwords do nothing to minimize the risk of passwords being captured.

NEW QUESTION 25

- (Topic 1)

Which of the following is NOT a type of motion detector?

- A. Photoelectric sensor
- B. Passive infrared sensors
- C. Microwave Sensor.
- D. Ultrasonic Sensor.

Answer: A

Explanation:

A photoelectric sensor does not "directly" sense motion there is a narrow beam that won't set off the sensor unless the beam is broken. Photoelectric sensors, along with dry contact switches, are a type of perimeter intrusion detector.

All of the other answers are valid types of motion detectors types.

The content below on the different types of sensors is from Wikipedia: Indoor Sensors

These types of sensors are designed for indoor use. Outdoor use would not be advised due to false alarm vulnerability and weather durability. Passive infrared detectors



C:\Users\MCS\Desktop\1.jpg Passive Infrared Sensor

The passive infrared detector (PIR) is one of the most common detectors found in household and small business environments because it offers affordable and reliable functionality. The term passive means the detector is able to function without the need to generate and radiate its own energy (unlike ultrasonic and microwave volumetric intrusion detectors that are ??active?? in operation). PIRs are able to distinguish if an infrared emitting object is present by first learning the ambient temperature of the monitored space and then detecting a change in the temperature caused by the presence of an object. Using the principle of differentiation, which is a check of presence or nonpresence, PIRs verify if an intruder or object is actually there. Creating individual zones of detection where each zone comprises one or more layers can achieve differentiation. Between the zones there are areas of no sensitivity (dead zones) that are used by the sensor for comparison.

Ultrasonic detectors

Using frequencies between 15 kHz and 75 kHz, these active detectors transmit ultrasonic sound waves that are inaudible to humans. The Doppler shift principle is the underlying method of operation, in which a change in frequency is detected due to object motion. This is caused when a moving object changes the frequency of sound waves around it. Two conditions must occur to successfully detect a Doppler shift event:

There must be motion of an object either towards or away from the receiver.

The motion of the object must cause a change in the ultrasonic frequency to the receiver relative to the transmitting frequency.

The ultrasonic detector operates by the transmitter emitting an ultrasonic signal into the area to be protected. The sound waves are reflected by solid objects (such as the surrounding floor, walls and ceiling) and then detected by the receiver. Because ultrasonic waves are transmitted through air, then hard-surfaced objects tend to reflect most of the ultrasonic energy, while soft surfaces tend to absorb most energy.

When the surfaces are stationary, the frequency of the waves detected by the receiver will be equal to the transmitted frequency. However, a change in frequency will occur as a result of the Doppler principle, when a person or object is moving towards or away from the detector. Such an event initiates an alarm signal. This technology is considered obsolete by many alarm professionals, and is not actively installed.

Microwave detectors

This device emits microwaves from a transmitter and detects any reflected microwaves or reduction in beam intensity using a receiver. The transmitter and receiver are usually combined inside a single housing (monostatic) for indoor applications, and separate housings (bistatic) for outdoor applications. To reduce false alarms this type of detector is usually combined with a passive infrared detector or "Dualtec" alarm.

Microwave detectors respond to a Doppler shift in the frequency of the reflected energy, by a phase shift, or by a sudden reduction of the level of received energy. Any of these effects may indicate motion of an intruder.

Photo-electric beams

Photoelectric beam systems detect the presence of an intruder by transmitting visible or infrared light beams across an area, where these beams may be obstructed. To improve the detection surface area, the beams are often employed in stacks of two or more. However, if an intruder is aware of the technology's presence, it can be avoided. The technology can be an effective long-range detection system, if installed in stacks of three or more where the transmitters and receivers are staggered to create a fence-like barrier. Systems are available for both internal and external applications. To prevent a clandestine attack using a secondary light source being used to hold the detector in a 'sealed' condition whilst an intruder passes through, most systems use and detect a modulated light source.

Glass break detectors

The glass break detector may be used for internal perimeter building protection. When glass breaks it generates sound in a wide band of frequencies. These can range from infrasonic, which is below 20 hertz (Hz) and can not be heard by the human ear, through the audio band from 20 Hz to 20 kHz which humans can hear, right up to ultrasonic, which is above 20 kHz and again cannot be heard. Glass break acoustic detectors are mounted in close proximity to the glass panes and listen for sound frequencies associated with glass breaking. Seismic glass break detectors are different in that they are installed on the glass pane. When glass breaks it produces specific shock frequencies which travel through the glass and often through the window frame and the surrounding walls and ceiling. Typically, the most intense frequencies generated are between 3 and 5 kHz, depending on the type of glass and the presence of a plastic interlayer. Seismic glass break detectors ??feel?? these shock frequencies and in turn generate an alarm condition.

The more primitive detection method involves gluing a thin strip of conducting foil on the inside of the glass and putting low-power electrical current through it. Breaking the glass is practically guaranteed to tear the foil and break the circuit.

Smoke, heat, and carbon monoxide detectors



C:\Users\MCS\Desktop\1.jpg Heat Detection System

Most systems may also be equipped with smoke, heat, and/or carbon monoxide detectors. These are also known as 24 hour zones (which are on at all times). Smoke detectors and heat detectors protect from the risk of fire and carbon monoxide detectors protect from the risk of carbon monoxide. Although an intruder alarm panel may also have these detectors connected, it may not meet all the local fire code requirements of a fire alarm system.

Other types of volumetric sensors could be:

Active Infrared

Passive Infrared/Microwave combined Radar

Accoustical Sensor/Audio Vibration Sensor (seismic) Air Turbulence

NEW QUESTION 30

- (Topic 1)

Which integrity model defines a constrained data item, an integrity verification procedure and a transformation procedure?

- A. The Take-Grant model
- B. The Biba integrity model
- C. The Clark Wilson integrity model
- D. The Bell-LaPadula integrity model

Answer: C

Explanation:

The Clark Wilson integrity model addresses the three following integrity goals: 1) data is protected from modification by unauthorized users; 2) data is protected from unauthorized modification by authorized users; and 3) data is internally and externally consistent. It also defines a Constrained Data Item (CDI), an Integrity Verification Procedure (IVP), a Transformation Procedure (TP) and an Unconstrained Data item. The Bell-LaPadula and Take-Grant models are not integrity models.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architecture and Models (page 205).

NEW QUESTION 34

- (Topic 1)

Which one of the following authentication mechanisms creates a problem for mobile users?

- A. Mechanisms based on IP addresses
- B. Mechanism with reusable passwords
- C. one-time password mechanism.
- D. challenge response mechanism.

Answer: A

Explanation:

Anything based on a fixed IP address would be a problem for mobile users because their location and its associated IP address can change from one time to the next. Many providers will assign a new IP every time the device would be restarted. For example an insurance adjuster using a laptop to file claims online. He goes to a different client each time and the address changes every time he connects to the ISP.

NOTE FROM CLEMENT:

The term MOBILE in this case is synonymous with Road Warriors where a user is constantly traveling and changing location. With smartphone today that may not be an issue but it would be an issue for laptops or WIFI tablets. Within a carrier network the IP will tend to be the same and would change rarely. So this question is more applicable to devices that are not cellular devices but in some cases this issue could affect cellular devices as well.

The following answers are incorrect:

mechanism with reusable password. This is incorrect because reusable password mechanism would not present a problem for mobile users. They are the least secure and change only at specific interval.

one-time password mechanism. This is incorrect because a one-time password mechanism would not present a problem for mobile users. Many are based on a clock and not on the IP address of the user.

challenge response mechanism. This is incorrect because challenge response mechanism would not present a problem for mobile users.

NEW QUESTION 37

- (Topic 1)

Organizations should consider which of the following first before allowing external access to their LANs via the Internet?

- A. plan for implementing workstation locking mechanisms.
- B. plan for protecting the modem pool.
- C. plan for providing the user with his account usage information.
- D. plan for considering proper authentication options.

Answer: D

Explanation:

Before a LAN is connected to the Internet, you need to determine what the access controls mechanisms are to be used, this would include how you are going to authenticate individuals that may access your network externally through access control.

The following answers are incorrect:

plan for implementing workstation locking mechanisms. This is incorrect because locking the workstations have no impact on the LAN or Internet access.

plan for protecting the modem pool. This is incorrect because protecting the modem pool has no impact on the LAN or Internet access, it just protects the modem.

plan for providing the user with his account usage information. This is incorrect because the question asks what should be done first. While important your primary concern should be focused on security.

NEW QUESTION 42

- (Topic 1)

Which access control model provides upper and lower bounds of access capabilities for a subject?

- A. Role-based access control
- B. Lattice-based access control
- C. Biba access control
- D. Content-dependent access control

Answer: B

Explanation:

In the lattice model, users are assigned security clearances and the data is classified. Access decisions are made based on the clearance of the user and the

classification of the object. Lattice-based access control is an essential ingredient of formal security models such as Bell-LaPadula, Biba, Chinese Wall, etc. The bounds concept comes from the formal definition of a lattice as a "partially ordered set for which every pair of elements has a greatest lower bound and a least upper bound." To see the application, consider a file classified as "SECRET" and a user Joe with a security clearance of "TOP SECRET." Under Bell-LaPadula, Joe's "least upper bound" access to the file is "READ" and his least lower bound is "NO WRITE" (star property). Role-based access control is incorrect. Under RBAC, the access is controlled by the permissions assigned to a role and the specific role assigned to the user. Biba access control is incorrect. The Biba integrity model is based on a lattice structure but the context of the question disqualifies it as the best answer. Content-dependent access control is incorrect. In content dependent access control, the actual content of the information determines access as enforced by the arbiter.

References:

CBK, pp. 324-325.

AIO3, pp. 291-293. See particularly Figure 5-19 on p. 293 for an illustration of bounds in action.

NEW QUESTION 44

- (Topic 1)

Which of the following security models does NOT concern itself with the flow of data?

- A. The information flow model
- B. The Biba model
- C. The Bell-LaPadula model
- D. The noninterference model

Answer: D

Explanation:

The goal of a noninterference model is to strictly separate differing security levels to assure that higher-level actions do not determine what lower-level users can see. This is in contrast to other security models that control information flows between differing levels of users. By maintaining strict separation of security levels, a noninterference model minimizes leakages that might happen through a covert channel.

The Bell-LaPadula model is incorrect. The Bell-LaPadula model is concerned with confidentiality and bases access control decisions on the classification of objects and the clearances of subjects.

The information flow model is incorrect. The information flow models have a similar framework to the Bell-LaPadula model and control how information may flow between objects based on security classes.

The Biba model is incorrect. The Biba model is concerned with integrity and is a complement to the Bell-LaPadula model in that higher levels of integrity are more trusted than lower levels. Access control is based on these integrity levels to assure that read/write operations do not decrease an object's integrity.

References:

CBK, pp 325 - 326

AIO3, pp. 290 - 291

NEW QUESTION 49

- (Topic 1)

The control measures that are intended to reveal the violations of security policy using software and hardware are associated with:

- A. Preventive/physical
- B. Detective/technical
- C. Detective/physical
- D. Detective/administrative

Answer: B

Explanation:

The detective/technical control measures are intended to reveal the violations of security policy using technical means.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 35.

NEW QUESTION 50

- (Topic 1)

Which of the following describes the major disadvantage of many Single Sign-On (SSO) implementations?

- A. Once an individual obtains access to the system through the initial log-on, they have access to all resources within the environment that the account has access to.
- B. The initial logon process is cumbersome to discourage potential intruders.
- C. Once a user obtains access to the system through the initial log-on, they only need to logon to some applications.
- D. Once a user obtains access to the system through the initial log-on, he has to logout from all other systems

Answer: A

Explanation:

Single Sign-On is a distributed Access Control methodology where an individual only has to authenticate once and would have access to all primary and secondary network domains. The individual would not be required to re-authenticate when they needed additional resources. The security issue that this creates is if a fraudster is able to compromise those credentials they too would have access to all the resources that account has access to.

All the other answers are incorrect as they are distractors.

NEW QUESTION 52

- (Topic 1)

Which of the following is not a physical control for physical security?

- A. lighting
- B. fences
- C. training
- D. facility construction materials

Answer: C

Explanation:

Some physical controls include fences, lights, locks, and facility construction materials. Some administrative controls include facility selection and construction, facility management, personnel controls, training, and emergency response and procedures.

From: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 3rd. Ed., Chapter 6, page 403.

NEW QUESTION 57

- (Topic 1)

The end result of implementing the principle of least privilege means which of the following?

- A. Users would get access to only the info for which they have a need to know
- B. Users can access all systems.
- C. Users get new privileges added when they change positions.
- D. Authorization creep.

Answer: A

Explanation:

The principle of least privilege refers to allowing users to have only the access they need and not anything more. Thus, certain users may have no need to access any of the files on specific systems.

The following answers are incorrect:

Users can access all systems. Although the principle of least privilege limits what access and systems users have authorization to, not all users would have a need to know to access all of the systems. The best answer is still Users would get access to only the info for which they have a need to know as some of the users may not have a need to access a system.

Users get new privileges when they change positions. Although true that a user may indeed require new privileges, this is not a given fact and in actuality a user may require less privileges for a new position. The principle of least privilege would require that the rights required for the position be closely evaluated and where possible rights revoked.

Authorization creep. Authorization creep occurs when users are given additional rights with new positions and responsibilities. The principle of least privilege should actually prevent authorization creep.

The following reference(s) were/was used to create this question: ISC2 OIG 2007 p.101,123

Shon Harris AIO v3 p148, 902-903

NEW QUESTION 62

- (Topic 1)

RADIUS incorporates which of the following services?

- A. Authentication server and PIN codes.
- B. Authentication of clients and static passwords generation.
- C. Authentication of clients and dynamic passwords generation.
- D. Authentication server as well as support for Static and Dynamic passwords.

Answer: D

Explanation:

A Network Access Server (NAS) operates as a client of RADIUS. The client is responsible for passing user information to designated RADIUS servers, and then acting on the response which is returned.

RADIUS servers are responsible for receiving user connection requests, authenticating the user, and then returning all configuration information necessary for the client to deliver service to the user.

RADIUS authentication is based on provisions of simple username/password credentials.

These credentials are encrypted

by the client using a shared secret between the client and the RADIUS server. OIG 2007, Page 513

RADIUS incorporates an authentication server and can make use of both dynamic and static passwords.

Since it uses the PAP and CHAP protocols, it also includes static passwords.

RADIUS is an Internet protocol. RADIUS carries authentication, authorization, and configuration information between a Network Access Server and a shared Authentication Server. RADIUS features and functions are described primarily in the IETF (International Engineering Task Force) document RFC2138.

The term "RADIUS" is an acronym which stands for Remote Authentication Dial In User Service.

The main advantage to using a RADIUS approach to authentication is that it can provide a stronger form of authentication. RADIUS is capable of using a strong, two-factor form of authentication, in which users need to possess both a user ID and a hardware or software token to gain access.

Token-based schemes use dynamic passwords. Every minute or so, the token generates a unique 4-, 6- or 8-digit access number that is synchronized with the security server. To gain entry into the system, the user must generate both this one-time number and provide his or her user ID and password.

Although protocols such as RADIUS cannot protect against theft of an authenticated session via some realtime attacks, such as wiretapping, using unique, unpredictable authentication requests can protect against a wide range of active attacks.

RADIUS: Key Features and Benefits

RADIUS supports dynamic passwords and challenge/response passwords. Improved system security due to the fact that passwords are not static.

It is much more difficult for a bogus host to spoof users into giving up their passwords or password-generation algorithms.

RADIUS allows the user to have a single user ID and password for all computers in a network.

Improved usability due to the fact that the user has to remember only one login combination.

RADIUS is able to:

Prevent RADIUS users from logging in via login (or ftp). Require them to log in via login (or ftp)

Require them to login to a specific network access server (NAS); Control access by time of day.

Provides very granular control over the types of logins allowed, on a per-user basis. The time-out interval for failing over from an unresponsive primary RADIUS server to a

backup RADIUS server is site-configurable.

RADIUS gives System Administrator more flexibility in managing which users can login from which hosts or devices.

Stratus Technology Product Brief <http://www.stratus.com/products/vos/opencvos/radius.htm>

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Pages 43, 44.

Also check: MILLER, Lawrence & GREGORY, Peter, CISSP for Dummies, 2002, Wiley Publishing, Inc., pages 45-46.

NEW QUESTION 66

- (Topic 1)

Which of the following control pairings include: organizational policies and procedures, pre-employment background checks, strict hiring practices, employment agreements, employee termination procedures, vacation scheduling, labeling of sensitive materials, increased supervision, security awareness training, behavior awareness, and sign-up procedures to obtain access to information systems and networks?

- A. Preventive/Administrative Pairing
- B. Preventive/Technical Pairing
- C. Preventive/Physical Pairing
- D. Detective/Administrative Pairing

Answer: A

Explanation:

The Answer: Preventive/Administrative Pairing: These mechanisms include organizational policies and procedures, pre-employment background checks, strict hiring practices, employment agreements, friendly and unfriendly employee termination procedures, vacation scheduling, labeling of sensitive materials, increased supervision, security awareness training, behavior awareness, and sign-up procedures to obtain access to information systems and networks.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

NEW QUESTION 69

- (Topic 1)

Which of the following statements relating to the Bell-LaPadula security model is FALSE (assuming the Strong Star property is not being used) ?

- A. A subject is not allowed to read up.
- B. The property restriction can be escaped by temporarily downgrading a high level subject.
- C. A subject is not allowed to read down.
- D. It is restricted to confidentiality.

Answer: C

Explanation:

It is not a property of Bell LaPadula model. The other answers are incorrect because:

A subject is not allowed to read up is a property of the 'simple security rule' of Bell LaPadula model.

The property restriction can be escaped by temporarily downgrading a high level subject can be escaped by temporarily downgrading a high level subject or by identifying a set of trusted objects which are permitted to violate the property as long as it is not in the middle of an operation.

It is restricted to confidentiality as it is a state machine model that enforces the confidentiality aspects of access control.

Reference: Shon Harris AIO v3 , Chapter-5 : Security Models and Architecture , Page:279-282

NEW QUESTION 73

- (Topic 1)

In the context of Biometric authentication, what is a quick way to compare the accuracy of devices. In general, the device that have the lowest value would be the most accurate. Which of the following would be used to compare accuracy of devices?

- A. the CER is used.
- B. the FRR is used
- C. the FAR is used
- D. the FER is used

Answer: A

Explanation:

equal error rate or crossover error rate (EER or CER): the rate at which both accept and reject errors are equal. The value of the EER can be easily obtained from the ROC curve. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

In the context of Biometric Authentication almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in an airport metal detector, the system becomes increasingly selective and has a higher False Reject Rate (FRR). Conversely, if the sensitivity is decreased, the False Acceptance Rate (FAR) will increase. Thus, to have a valid measure of the system performance, the CrossOver Error Rate (CER) is used.

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. In case of similarity scale, if the person is imposter in real, but the matching score is higher than the threshold, then he is treated as genuine that increase the FAR and hence performance also depends upon the selection of threshold value.

false reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected.

failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

failure to capture rate (FTC): Within automatic systems, the probability that the system fails to detect a biometric input when presented correctly.

template capacity: the maximum number of sets of data which can be stored in the system. Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten

Domains of Computer Security, 2001, John Wiley & Sons, Page 37. and

Wikipedia at: <https://en.wikipedia.org/wiki/Biometrics>

NEW QUESTION 76

- (Topic 1)

Identification and authentication are the keystones of most access control systems. Identification establishes:

- A. User accountability for the actions on the system.
- B. Top management accountability for the actions on the system.

- C. EDP department accountability for the actions of users on the system.
- D. Authentication for actions on the system

Answer: A

Explanation:

Identification and authentication are the keystones of most access control systems. Identification establishes user accountability for the actions on the system. The control environment can be established to log activity regarding the identification, authentication, authorization, and use of privileges on a system. This can be used to detect the occurrence of errors, the attempts to perform an unauthorized action, or to validate when provided credentials were exercised. The logging system as a detective device provides evidence of actions (both successful and unsuccessful) and tasks that were executed by authorized users.

Once a person has been identified through the user ID or a similar value, she must be authenticated, which means she must prove she is who she says she is. Three general factors can be used for authentication: something a person knows, something a person has, and something a person is. They are also commonly called authentication by knowledge, authentication by ownership, and authentication by characteristic.

For a user to be able to access a resource, he first must prove he is who he claims to be, has the necessary credentials, and has been given the necessary rights or privileges to perform the actions he is requesting. Once these steps are completed successfully, the user can access and use network resources; however, it is necessary to track the user's activities and enforce accountability for his actions.

Identification describes a method of ensuring that a subject (user, program, or process) is the entity it claims to be. Identification can be provided with the use of a username or account number. To be properly authenticated, the subject is usually required to provide a second piece to the credential set. This piece could be a password, passphrase,

cryptographic key, personal identification number (PIN), anatomical attribute, or token.

These two credential items are compared to information that has been previously stored for this subject. If these credentials match the stored information, the subject is authenticated. But we are not done yet. Once the subject provides its credentials and is properly identified, the system it is trying to access needs to determine if this subject has been given the necessary rights and privileges to carry out the requested actions. The system will look at some type of access control matrix or compare security labels to verify that this subject may indeed access the requested resource and perform the actions it is attempting. If the system determines that the subject may access the resource, it authorizes the subject.

Although identification, authentication, authorization, and accountability have close and complementary definitions, each has distinct functions that fulfill a specific requirement in the process of access control. A user may be properly identified and authenticated to the network, but he may not have the authorization to access the files on the file server. On the other hand, a user may be authorized to access the files on the file server, but until she is properly identified and authenticated, those resources are out of reach.

Reference(s) used for this question:

Schneider, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition: Access Control ((ISC)2 Press) (Kindle Locations 889-892). Auerbach Publications. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3875-3878). McGraw-Hill. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3833-3848). McGraw-Hill. Kindle Edition.

and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 78

- (Topic 1)

When submitting a passphrase for authentication, the passphrase is converted into ...

- A. a virtual password by the system
- B. a new passphrase by the system
- C. a new passphrase by the encryption technology
- D. a real password by the system which can be used forever

Answer: A

Explanation:

Passwords can be compromised and must be protected. In the ideal case, a password should only be used once. The changing of passwords can also fall between these two extremes.

Passwords can be required to change monthly, quarterly, or at other intervals, depending on the criticality of the information needing protection and the password's frequency of use.

Obviously, the more times a password is used, the more chance there is of it being compromised.

It is recommended to use a passphrase instead of a password. A passphrase is more resistant to attacks. The passphrase is converted into a virtual password by the system. Often time the passphrase will exceed the maximum length supported by the system and it must be truncated into a Virtual Password.

Reference(s) used for this question: <http://www.itl.nist.gov/fipspubs/fip112.htm>

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36 & 37.

NEW QUESTION 83

- (Topic 1)

Which of the following is not a security goal for remote access?

- A. Reliable authentication of users and systems
- B. Protection of confidential data
- C. Easy to manage access control to systems and network resources
- D. Automated login for remote users

Answer: D

Explanation:

An automated login function for remote users would imply a weak authentication, thus certainly not a security goal.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition, volume 2, 2001, CRC Press, Chapter 5: An Introduction to Secure Remote Access (page 100).

NEW QUESTION 87

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on physical attributes of a person. This raised the necessity of answering 2 questions :

- A. what was the sex of a person and his age
- B. what part of body to be used and how to accomplish identification that is viable
- C. what was the age of a person and his income level
- D. what was the tone of the voice of a person and his habits

Answer: B

Explanation:

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already taking place. Unique physical attributes or behavior of a person are used for that purpose.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

NEW QUESTION 88

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on :

- A. sex of a person
- B. physical attributes of a person
- C. age of a person
- D. voice of a person

Answer: B

Explanation:

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already under way.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

NEW QUESTION 89

- (Topic 1)

The Orange Book is founded upon which security policy model?

- A. The Biba Model
- B. The Bell LaPadula Model
- C. Clark-Wilson Model
- D. TEMPEST

Answer: B

Explanation:

From the glossary of Computer Security Basics:

The Bell-LaPadula model is the security policy model on which the Orange Book requirements are based. From the Orange Book definition, "A formal state transition model of computer security policy that describes a set of access control rules. In this formal model, the entities in a computer system are divided into abstract sets of subjects and objects. The notion of secure state is defined and it is proven that each state transition preserves security by moving from secure state to secure state; thus, inductively proving the system is secure. A system state is defined to be 'secure' if the only permitted access modes of subjects to objects are in accordance with a specific security policy. In order to determine whether or not a specific access mode is allowed, the clearance of a subject is compared to the classification of the object and a determination is made as to whether the subject is authorized for the specific access mode."

The Biba Model is an integrity model of computer security policy that describes a set of rules. In this model, a subject may not depend on any object or other subject that is less trusted than itself.

The Clark Wilson Model is an integrity model for computer security policy designed for a commercial environment. It addresses such concepts as nondiscretionary access control, privilege separation, and least privilege. TEMPEST is a government program that prevents the compromising electrical and electromagnetic signals that emanate from computers and related equipment from being intercepted and deciphered.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, 1991.

Also: U.S. Department of Defense, Trusted Computer System Evaluation Criteria (Orange Book), DOD 5200.28-STD. December 1985 (also available here).

NEW QUESTION 90

- (Topic 1)

Which of the following Operation Security controls is intended to prevent unauthorized intruders from internally or externally accessing the system, and to lower the amount and impact of unintentional errors that are entering the system?

- A. Detective Controls
- B. Preventative Controls
- C. Corrective Controls
- D. Directive Controls

Answer: B

Explanation:

In the Operations Security domain, Preventative Controls are designed to prevent unauthorized intruders from internally or externally accessing the system, and to lower the amount and impact of unintentional errors that are entering the system. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 217.

NEW QUESTION 95

- (Topic 1)

This baseline sets certain thresholds for specific errors or mistakes allowed and the amount of these occurrences that can take place before it is considered suspicious?

- A. Checkpoint level
- B. Ceiling level
- C. Clipping level
- D. Threshold level

Answer: C

Explanation:

Organizations usually forgive a particular type, number, or pattern of violations, thus permitting a predetermined number of user errors before gathering this data for analysis. An organization attempting to track all violations, without sophisticated statistical computing ability, would be unable to manage the sheer quantity of such data. To make a violation listing effective, a clipping level must be established.

The clipping level establishes a baseline for violation activities that may be normal user errors. Only after this baseline is exceeded is a violation record produced. This solution is particularly effective for small- to medium-sized installations. Organizations with large-scale computing facilities often track all violations and use statistical routines to cull out the minor infractions (e.g., forgetting a password or mistyping it several times).

If the number of violations being tracked becomes unmanageable, the first step in correcting the problems should be to analyze why the condition has occurred. Do users understand how they are to interact with the computer resource? Are the rules too difficult to follow? Violation tracking and analysis can be valuable tools in assisting an organization to develop thorough but useable controls. Once these are in place and records are produced that accurately reflect serious violations, tracking and analysis become the first line of defense. With this procedure, intrusions are discovered before major damage occurs and sometimes early enough to catch the perpetrator. In addition, business protection and preservation are strengthened.

The following answers are incorrect:

All of the other choices presented were simply detractors. The following reference(s) were used for this question:

Handbook of Information Security Management

NEW QUESTION 98

- (Topic 1)

In addition to the accuracy of the biometric systems, there are other factors that must also be considered:

- A. These factors include the enrollment time and the throughput rate, but not acceptability.
- B. These factors do not include the enrollment time, the throughput rate, and acceptability.
- C. These factors include the enrollment time, the throughput rate, and acceptability.
- D. These factors include the enrollment time, but not the throughput rate, neither the acceptability.

Answer: C

Explanation:

In addition to the accuracy of the biometric systems, there are other factors that must also be considered.

These factors include the enrollment time, the throughput rate, and acceptability. Enrollment time is the time it takes to initially "register" with a system by providing samples

of the biometric characteristic to be evaluated. An acceptable enrollment time is around two minutes.

For example, in fingerprint systems, the actual fingerprint is stored and requires approximately 250kb per finger for a high quality image. This level of information is required for one-to-many searches in forensics applications on very large databases.

In finger-scan technology, a full fingerprint is not stored-the features extracted from this fingerprint are stored using a small template that requires approximately 500 to 1000 bytes of storage. The original fingerprint cannot be reconstructed from this template.

Updates of the enrollment information may be required because some biometric characteristics, such as voice and signature, may change with time.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37 & 38.

NEW QUESTION 100

- (Topic 1)

What are the components of an object's sensitivity label?

- A. A Classification Set and a single Compartment.
- B. A single classification and a single compartment.
- C. A Classification Set and user credentials.
- D. A single classification and a Compartment Set.

Answer: D

Explanation:

Both are the components of a sensitivity label. The following are incorrect:

A Classification Set and a single Compartment. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not a "single compartment" but a Compartment Set.

A single classification and a single compartment. Is incorrect because while there only is one classification, it is not a "single compartment" but a Compartment Set.

A Classification Set and user credentials. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not "user credential" but a Compartment Set. The user would have their own sensitivity label.

NEW QUESTION 103

- (Topic 1)

Which of the following is not a two-factor authentication mechanism?

- A. Something you have and something you know.
- B. Something you do and a password.
- C. A smartcard and something you are.
- D. Something you know and a password.

Answer: D

Explanation:

Something you know and a password fits within only one of the three ways authentication could be done. A password is an example of something you know,

thereby something you know and a password does not constitute a two-factor authentication as both are in the same category of factors.

A two-factor (strong) authentication relies on two different kinds of authentication factors out of a list of three possible choice:

something you know (e.g. a PIN or password),

something you have (e.g. a smart card, token, magnetic card),

something you are is mostly Biometrics (e.g. a fingerprint) or something you do (e.g. signature dynamics).

TIP FROM CLEMENT:

On the real exam you can expect to see synonyms and sometimes sub-categories under the main categories. People are familiar with Pin, Passphrase, Password as subset of Something you know.

However, when people see choices such as Something you do or Something you are they immediately get confused and they do not think of them as subset of Biometrics where you have Biometric implementation based on behavior and physiological attributes. So something you do falls under the Something you are category as a subset.

Something your do would be signing your name or typing text on your keyboard for example.

Strong authentication is simply when you make use of two factors that are within two different categories.

Reference(s) used for this question:

Shon Harris, CISSP All In One, Fifth Edition, pages 158-159

NEW QUESTION 104

- (Topic 1)

Kerberos can prevent which one of the following attacks?

- A. tunneling attack.
- B. playback (replay) attack.
- C. destructive attack.
- D. process attack.

Answer: B

Explanation:

Each ticket in Kerberos has a timestamp and are subject to time expiration to help prevent these types of attacks. The following answers are incorrect:

tunneling attack. This is incorrect because a tunneling attack is an attempt to bypass security and access low-level systems. Kerberos cannot totally prevent these types of attacks.

destructive attack. This is incorrect because depending on the type of destructive attack, Kerberos cannot prevent someone from physically destroying a server.

process attack. This is incorrect because with Kerberos cannot prevent an authorized individuals from running processes.

NEW QUESTION 105

- (Topic 1)

What does the (star) integrity axiom mean in the Biba model?

- A. No read up
- B. No write down
- C. No read down
- D. No write up

Answer: D

Explanation:

The (star) integrity axiom of the Biba access control model states that an object at one level of integrity is not permitted to modify an object of a higher level of integrity (no write up).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 205).

NEW QUESTION 106

- (Topic 1)

This is a common security issue that is extremely hard to control in large environments. It occurs when a user has more computer rights, permissions, and access than what is required for the tasks the user needs to fulfill. What best describes this scenario?

- A. Excessive Rights
- B. Excessive Access
- C. Excessive Permissions
- D. Excessive Privileges

Answer: D

Explanation:

Even thou all 4 terms are very close to each other, the best choice is Excessive Privileges which would include the other three choices presented.

Reference(s) used for this question:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 645.

and

NEW QUESTION 109

- (Topic 1)

Which of the following is NOT a compensating measure for access violations?

- A. Backups
- B. Business continuity planning
- C. Insurance
- D. Security awareness

Answer: D

Explanation:

Security awareness is a preventive measure, not a compensating measure for access violations.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 50).

NEW QUESTION 112

- (Topic 1)

Which of the following access control models requires defining classification for objects?

- A. Role-based access control
- B. Discretionary access control
- C. Identity-based access control
- D. Mandatory access control

Answer: D

Explanation:

With mandatory access control (MAC), the authorization of a subject's access to an object is dependant upon labels, which indicate the subject's clearance, and classification of objects.

The Following answers were incorrect:

Identity-based Access Control is a type of Discretionary Access Control (DAC), they are synonymous.

Role Based Access Control (RBAC) and Rule Based Access Control (RuBAC or RBAC) are types of Non Discretionary Access Control (NDAC).

Tip:

When you have two answers that are synonymous they are not the right choice for sure.

There is only one access control model that makes use of Label, Clearances, and Categories, it is Mandatory Access Control, none of the other one makes use of those items.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

NEW QUESTION 117

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

Answer: D

Explanation:

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

NEW QUESTION 119

- (Topic 1)

The following is NOT a security characteristic we need to consider while choosing a biometric identification systems:

- A. data acquisition process
- B. cost
- C. enrollment process
- D. speed and user interface

Answer: B

Explanation:

Cost is a factor when considering Biometrics but it is not a security characteristic.

All the other answers are incorrect because they are security characteristics related to Biometrics.

data acquisition process can cause a security concern because if the process is not fast and efficient it can discourage individuals from using the process.

enrollment process can cause a security concern because the enrollment process has to be quick and efficient. This process captures data for authentication.

speed and user interface can cause a security concern because this also impacts the users acceptance rate of biometrics. If they are not comfortable with the interface and speed they might sabotage the devices or otherwise attempt to circumvent them.

References:

OIG Access Control (Biometrics) (pgs 165-167)

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Pages 5-6.

in process of correction

NEW QUESTION 121

- (Topic 1)

Which of the following is true of two-factor authentication?

- A. It uses the RSA public-key signature based on integers with large prime factors.
- B. It requires two measurements of hand geometry.
- C. It does not use single sign-on technology.
- D. It relies on two independent proofs of identity.

Answer: D

Explanation:

The Answer It relies on two independent proofs of identity. Two-factor authentication refers to using two independent proofs of identity, such as something the user has (e.g. a token card) and something the user knows (a password). Two-factor authentication may be used with single sign-on. The following answers are incorrect: It requires two measurements of hand geometry. Measuring hand geometry twice does not yield two independent proofs. It uses the RSA public-key signature based on integers with large prime factors. RSA encryption uses integers with exactly two prime factors, but the term "two-factor authentication" is not used in that context. It does not use single sign-on technology. This is a detractor. The following reference(s) were/was used to create this question:
Shon Harris AIO v.3 p.129
ISC2 OIG, 2007 p. 126

NEW QUESTION 122

- (Topic 1)

Which of the following exemplifies proper separation of duties?

- A. Operators are not permitted modify the system time.
- B. Programmers are permitted to use the system console.
- C. Console operators are permitted to mount tapes and disks.
- D. Tape operators are permitted to use the system console.

Answer: A

Explanation:

This is an example of Separation of Duties because operators are prevented from modifying the system time which could lead to fraud. Tasks of this nature should be performed by they system administrators. AIO defines Separation of Duties as a security principle that splits up a critical task among two or more individuals to ensure that one person cannot complete a risky task by himself. The following answers are incorrect: Programmers are permitted to use the system console. Is incorrect because programmers should not be permitted to use the system console, this task should be performed by operators. Allowing programmers access to the system console could allow fraud to occur so this is not an example of Separation of Duties.. Console operators are permitted to mount tapes and disks. Is incorrect because operators should be able to mount tapes and disks so this is not an example of Separation of Duties. Tape operators are permitted to use the system console. Is incorrect because operators should be able to use the system console so this is not an example of Separation of Duties. References:
OIG CBK Access Control (page 98 - 101) AIOv3 Access Control (page 182)

NEW QUESTION 123

- (Topic 1)

What is called the percentage of valid subjects that are falsely rejected by a Biometric Authentication system?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error
- C. Crossover Error Rate (CER)
- D. True Rejection Rate (TRR) or Type III Error

Answer: A

Explanation:

The percentage of valid subjects that are falsely rejected is called the False Rejection Rate (FRR) or Type I Error. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 124

- (Topic 1)

Access Control techniques do not include which of the following?

- A. Rule-Based Access Controls
- B. Role-Based Access Control
- C. Mandatory Access Control
- D. Random Number Based Access Control

Answer: D

Explanation:

Access Control Techniques Discretionary Access Control
Mandatory Access Control Lattice Based Access Control Rule-Based Access Control Role-Based Access Control
Source: DUPUIS, Clement, Access Control Systems and Methodology, Version 1, May 2002, CISSP Open Study Group Study Guide for Domain 1, Page 13.

NEW QUESTION 125

- (Topic 1)

Which of the following division is defined in the TCSEC (Orange Book) as minimal protection?

- A. Division D

- B. Division C
- C. Division B
- D. Division A

Answer: A

Explanation:

The criteria are divided into four divisions: D, C, B, and A ordered in a hierarchical manner with the highest division (A) being reserved for systems providing the most comprehensive security.

Each division represents a major improvement in the overall confidence one can place in the system for the protection of sensitive information.

Within divisions C and B there are a number of subdivisions known as classes. The classes are also ordered in a hierarchical manner with systems representative of division C and lower classes of division B being characterized by the set of computer security mechanisms that they possess.

Assurance of correct and complete design and implementation for these systems is gained mostly through testing of the security- relevant portions of the system.

The security-relevant portions of a system are referred to throughout this document as the Trusted Computing Base (TCB).

Systems representative of higher classes in division B and division A derive their security attributes more from their design and implementation structure.

Increased assurance that the required features are operative, correct, and tamperproof under all circumstances is gained through progressively more rigorous analysis during the design process.

TCSEC provides a classification system that is divided into hierarchical divisions of assurance levels:

Division D - minimal security Division C - discretionary protection Division B - mandatory protection Division A - verified protection

Reference: page 358 AIO V.5 Shon Harris

also

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, page 197.

Also:

THE source for all TCSEC "level" questions: <http://csrc.nist.gov/publications/secpubs/rainbow/std001.txt>

NEW QUESTION 128

- (Topic 1)

In non-discretionary access control using Role Based Access Control (RBAC), a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on:

- A. The societies role in the organization
- B. The individual's role in the organization
- C. The group-dynamics as they relate to the individual's role in the organization
- D. The group-dynamics as they relate to the master-slave role in the organization

Answer: B

Explanation:

In Non-Discretionary Access Control, when Role Based Access Control is being used, a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on the individual's role in the organization.

Reference(S) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 129

- (Topic 1)

The throughput rate is the rate at which individuals, once enrolled, can be processed and identified or authenticated by a biometric system. Acceptable throughput rates are in the range of:

- A. 100 subjects per minute.
- B. 25 subjects per minute.
- C. 10 subjects per minute.
- D. 50 subjects per minute.

Answer: C

Explanation:

The throughput rate is the rate at which individuals, once enrolled, can be processed and identified or authenticated by a biometric system.

Acceptable throughput rates are in the range of 10 subjects per minute.

Things that may impact the throughput rate for some types of biometric systems may include:

A concern with retina scanning systems may be the exchange of body fluids on the eyepiece.

Another concern would be the retinal pattern that could reveal changes in a person's health, such as diabetes or high blood pressure.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 134

- (Topic 1)

What Orange Book security rating is reserved for systems that have been evaluated but fail to meet the criteria and requirements of the higher divisions?

- A. A
- B. D
- C. E
- D. F

Answer: B

Explanation:

D or "minimal protection" is reserved for systems that were evaluated under the TCSEC but did not meet the requirements for a higher trust level.

A is incorrect. A or "Verified Protection" is the highest trust level under the TCSEC. E is incorrect. The trust levels are A - D so "E" is not a valid trust level.

F is incorrect. The trust levels are A - D so "F" is not a valid trust level.

CBK, pp. 329 - 330

AIO3, pp. 302 - 306

NEW QUESTION 138

- (Topic 1)

Which of the following is NOT true of the Kerberos protocol?

- A. Only a single login is required per session.
- B. The initial authentication steps are done using public key algorithm.
- C. The KDC is aware of all systems in the network and is trusted by all of them
- D. It performs mutual authentication

Answer: B

Explanation:

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. It has the following characteristics:

It is secure: it never sends a password unless it is encrypted.

Only a single login is required per session. Credentials defined at login are then passed between resources without the need for additional logins.


The concept depends on a trusted third party ?C a Key Distribution Center (KDC). The KDC is aware of all systems in the network and is trusted by all of them.

It performs mutual authentication, where a client proves its identity to a server and a server proves its identity to the client.

Kerberos introduces the concept of a Ticket-Granting Server/Service (TGS). A client that wishes to use a service has to receive a ticket from the TGS ?C a ticket is a time-limited

cryptographic message ?C giving it access to the server. Kerberos also requires an Authentication Server (AS) to verify clients. The two servers combined make up a KDC.

Within the Windows environment, Active Directory performs the functions of the KDC. The following figure shows the sequence of events required for a client to gain access to a service using Kerberos authentication. Each step is shown with the Kerberos message associated with it, as defined in RFC 4120 ??The Kerberos Network Authorization Service (V5)??.

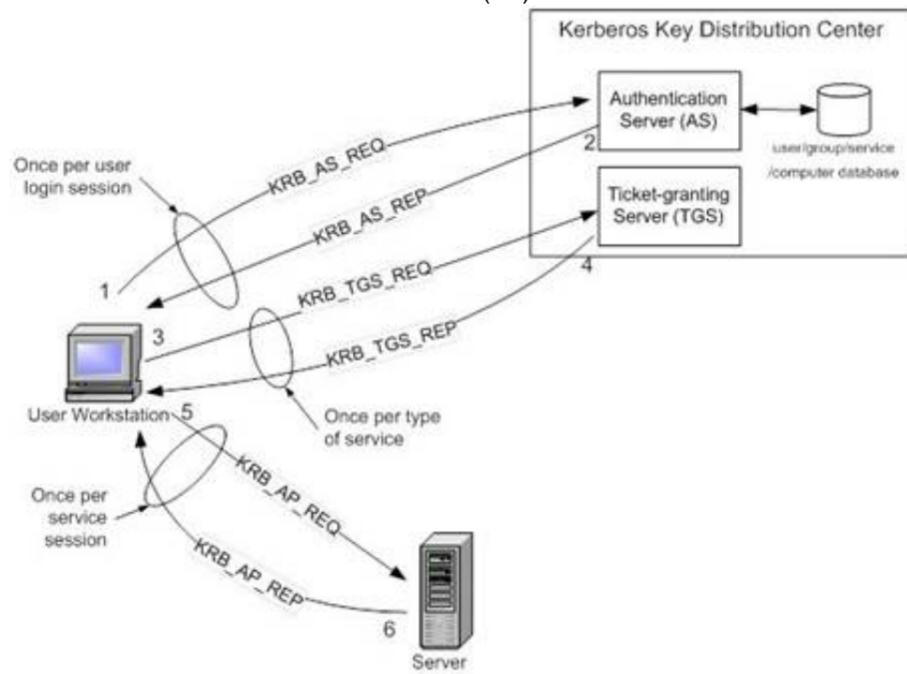

C:\Users\MCS\Desktop\1.jpg Kerberos Authentication Step by Step

Step 1: The user logs on to the workstation and requests service on the host. The workstation sends a message to the Authorization Server requesting a ticket granting ticket (TGT).

Step 2: The Authorization Server verifies the user??s access rights in the user database and creates a TGT and session key. The Authorization Server encrypts the results using a key derived from the user??s password and sends a message back to the user workstation.

The workstation prompts the user for a password and uses the password to decrypt the incoming message. When decryption succeeds, the user will be able to use the TGT to request a service ticket.

Step 3: When the user wants access to a service, the workstation client application sends a request to the Ticket Granting Service containing the client name, realm name and a timestamp. The user proves his identity by sending an authenticator encrypted with the session key received in Step 2.

Step 4: The TGS decrypts the ticket and authenticator, verifies the request, and creates a ticket for the requested server. The ticket contains the client name and optionally the client IP address. It also contains the realm name and ticket lifespan. The TGS returns the ticket to the user workstation. The returned message contains two copies of a server session key

?C one encrypted with the client password, and one encrypted by the service password.

Step 5: The client application now sends a service request to the server containing the ticket received in Step 4 and an authenticator. The service authenticates the request by decrypting the session key. The server verifies that the ticket and authenticator match, and then grants access to the service. This step as described does not include the authorization performed by the Intel AMT device, as described later.

Step 6: If mutual authentication is required, then the server will reply with a server authentication message.

The Kerberos server knows "secrets" (encrypted passwords) for all clients and servers under its control, or it is in contact with other secure servers that have this information. These "secrets" are used to encrypt all of the messages shown in the figure above.

To prevent "replay attacks," Kerberos uses timestamps as part of its protocol definition. For timestamps to work properly, the clocks of the client and the server need to be in synch as much as possible. In other words, both computers need to be set to the same time and date. Since the clocks of two computers are often out of synch, administrators can establish a policy to establish the maximum acceptable difference to Kerberos between a client's clock and server's clock. If the difference between a client's clock and the server's clock is less than the maximum time difference specified in this policy, any timestamp used in a session between the two computers will be considered authentic. The maximum difference is usually set to five minutes.

Note that if a client application wishes to use a service that is "Kerberized" (the service is configured to perform Kerberos authentication), the client must also be Kerberized so that it expects to support the necessary message responses.

For more information about Kerberos, see <http://web.mit.edu/kerberos/www/>.

References:

Introduction to Kerberos Authentication from Intel and

<http://www.zeroshell.net/eng/kerberos/Kerberos-definitions/#1.3.5.3> and

<http://www.ietf.org/rfc/rfc4120.txt>

NEW QUESTION 142

- (Topic 1)

What is Kerberos?

- A. A three-headed dog from the Egyptian mythology.
- B. A trusted third-party authentication protocol.
- C. A security model.
- D. A remote authentication dial in user server.

Answer: B

Explanation:

Is correct because that is exactly what Kerberos is. The following answers are incorrect:

A three-headed dog from Egyptian mythology. Is incorrect because we are dealing with Information Security and not the Egyptian mythology but the Greek Mythology.

A security model. Is incorrect because Kerberos is an authentication protocol and not just a security model.

A remote authentication dial in user server. Is incorrect because Kerberos is not a remote authentication dial in user server that would be called RADIUS.

NEW QUESTION 144

- (Topic 1)

Which access control model is best suited in an environment where a high security level is required and where it is desired that only the administrator grants access control?

- A. DAC
- B. MAC
- C. Access control matrix
- D. TACACS

Answer: B

Explanation:

MAC provides high security by regulating access based on the clearance of individual users and sensitivity labels for each object. Clearance levels and sensitivity levels cannot be modified by individual users -- for example, user Joe (SECRET clearance) cannot reclassify the "Presidential Doughnut Recipe" from "SECRET" to "CONFIDENTIAL" so that his friend Jane (CONFIDENTIAL clearance) can read it. The administrator is ultimately responsible for configuring this protection in accordance with security policy and directives from the Data Owner.

DAC is incorrect. In DAC, the data owner is responsible for controlling access to the object. Access control matrix is incorrect. The access control matrix is a way of thinking about the

access control needed by a population of subjects to a population of objects. This access control can be applied using rules, ACL's, capability tables, etc.

TACACS is incorrect. TACACS is a tool for performing user authentication. References:

CBK, p. 187, Domain 2: Access Control. AIO3, Chapter 4, Access Control.

NEW QUESTION 148

- (Topic 1)

What does the simple security (ss) property mean in the Bell-LaPadula model?

- A. No read up
- B. No write down
- C. No read down
- D. No write up

Answer: A

Explanation:

The ss (simple security) property of the Bell-LaPadula access control model states that reading of information by a subject at a lower sensitivity level from an object at a higher sensitivity level is not permitted (no read up).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 202).

NEW QUESTION 152

- (Topic 1)

Which one of the following factors is NOT one on which Authentication is based?

- A. Type 1. Something you know, such as a PIN or password
- B. Type 2. Something you have, such as an ATM card or smart card
- C. Type 3. Something you are (based upon one or more intrinsic physical or behavioral traits), such as a fingerprint or retina scan
- D. Type 4. Something you are, such as a system administrator or security administrator

Answer: D

Explanation:

Authentication is based on the following three factor types:

Type 1. Something you know, such as a PIN or password

Type 2. Something you have, such as an ATM card or smart card

Type 3. Something you are (Unique physical characteristic), such as a fingerprint or retina scan

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

Also: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 132-133).

NEW QUESTION 157

- (Topic 1)

The "vulnerability of a facility" to damage or attack may be assessed by all of the following except:

- A. Inspection
- B. History of losses
- C. Security controls
- D. security budget

Answer: D

Explanation:

Source: The CISSP Examination Textbook- Volume 2: Practice by S. Rao Vallabhaneni.

NEW QUESTION 160

- (Topic 1)

Which of the following statements pertaining to using Kerberos without any extension is false?

- A. A client can be impersonated by password-guessing.
- B. Kerberos is mostly a third-party authentication protocol.
- C. Kerberos uses public key cryptography.
- D. Kerberos provides robust authentication.

Answer: C

Explanation:

Kerberos is a trusted, credential-based, third-party authentication protocol that uses symmetric (secret) key cryptography to provide robust authentication to clients accessing services on a network.

Because a client's password is used in the initiation of the Kerberos request for the service protocol, password guessing can be used to impersonate a client.

Here is a nice overview of HOW Kerberos is implement as described in RFC 4556:

1. Introduction

The Kerberos V5 protocol [RFC4120] involves use of a trusted third party known as the Key Distribution Center (KDC) to negotiate shared session keys between clients and services and provide mutual authentication between them.

The corner-stones of Kerberos V5 are the Ticket and the Authenticator. A Ticket encapsulates a symmetric key (the ticket session key) in an envelope (a public message) intended for a specific service. The contents of the Ticket are encrypted with a symmetric key shared between the service principal and the issuing KDC. The encrypted part of the Ticket contains the client principal name, among other items. An Authenticator is a record that can be shown to have been recently generated using the ticket session key in the associated Ticket. The ticket session key is known by the client who requested the ticket. The contents of the Authenticator are encrypted with the associated ticket session key. The encrypted part of an Authenticator contains a timestamp and the client principal name, among other items.

As shown in Figure 1, below, the Kerberos V5 protocol consists of the following message exchanges between the client and the KDC, and the client and the application service:

The Authentication Service (AS) Exchange

The client obtains an "initial" ticket from the Kerberos authentication server (AS), typically a Ticket Granting Ticket (TGT). The AS-REQ message and the AS-REP message are the request and the reply message, respectively, between the client and the AS.

The Ticket Granting Service (TGS) Exchange

The client subsequently uses the TGT to authenticate and request a service ticket for a particular service, from the Kerberos ticket-granting server (TGS). The TGS-REQ message and the TGS-REP message are the request and the reply message respectively between the client and the TGS.

The Client/Server Authentication Protocol (AP) Exchange

The client then makes a request with an AP-REQ message, consisting of a service ticket and an authenticator that certifies the client's possession of the ticket session key. The server may optionally reply with an AP-REP message. AP exchanges typically negotiate session-specific symmetric keys.

Usually, the AS and TGS are integrated in a single device also known as the KDC.

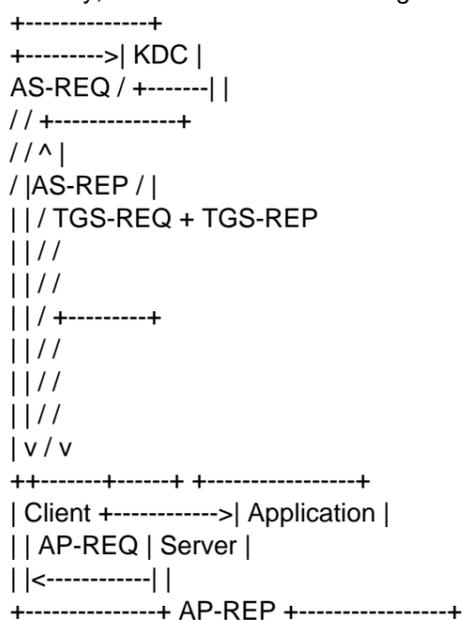


Figure 1: The Message Exchanges in the Kerberos V5 Protocol

In the AS exchange, the KDC reply contains the ticket session key, among other items, that is encrypted using a key (the AS reply key) shared between the client and the KDC. The AS reply key is typically derived from the client's password for human users. Therefore, for human users, the attack resistance strength of the Kerberos protocol is no stronger than the strength of their passwords.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 40).

And

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 147-151).

and <http://www.ietf.org/rfc/rfc4556.txt>

NEW QUESTION 162

- (Topic 1)

Why do buffer overflows happen? What is the main cause?

- A. Because buffers can only hold so much data
- B. Because of improper parameter checking within the application
- C. Because they are an easy weakness to exploit
- D. Because of insufficient system memory

Answer: B

Explanation:

Buffer Overflow attack takes advantage of improper parameter checking within the application. This is the classic form of buffer overflow and occurs because the programmer accepts whatever input the user supplies without checking to make sure that the length of the input is less than the size of the buffer in the program. The buffer overflow problem is one of the oldest and most common problems in software development and programming, dating back to the introduction of interactive computing. It can result when a program fills up the assigned buffer of memory with more data than its buffer can hold. When the program begins to write beyond the end of the buffer, the program's execution path can be changed, or data can be written into areas used by the operating system itself. This can lead to the insertion of malicious code that can be used to gain administrative privileges on the program or system.

As explained by Gaurab, it can become very complex. At the time of input even if you are checking the length of the input, it has to be check against the buffer size. Consider a case where entry point of data is stored in Buffer1 of Application1 and then you copy it to Buffer2 within Application2 later on, if you are just checking the length of data against Buffer1, it will not ensure that it will not cause a buffer overflow in Buffer2 of Application2.

A bit of reassurance from the ISC2 book about level of Coding Knowledge needed for the exam:

It should be noted that the CISSP is not required to be an expert programmer or know the inner workings of developing application software code, like the FORTRAN programming language, or how to develop Web applet code using Java. It is not even necessary that the CISSP know detailed security-specific coding practices such as the major divisions of buffer overflow exploits or the reason for preferring str(n)cpy to strcpy in the C language (although all such knowledge is, of course, helpful). Because the CISSP may be the person responsible for ensuring that security is included in such developments, the CISSP should know the basic procedures and concepts involved during the design and development of software programming. That is, in order for the CISSP to monitor the software development process and verify that security is included, the CISSP must understand the fundamental concepts of programming developments and the security strengths and weaknesses of various application development processes.

The following are incorrect answers:

"Because buffers can only hold so much data" is incorrect. This is certainly true but is not the best answer because the finite size of the buffer is not the problem -- the problem is that the programmer did not check the size of the input before moving it into the buffer.

"Because they are an easy weakness to exploit" is incorrect. This answer is sometimes true but is not the best answer because the root cause of the buffer overflow is that the programmer did not check the size of the user input.

"Because of insufficient system memory" is incorrect. This is irrelevant to the occurrence of a buffer overflow.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 13319-13323). Auerbach Publications. Kindle Edition.

NEW QUESTION 165

- (Topic 1)

Which of the following does not apply to system-generated passwords?

- A. Passwords are harder to remember for users.
- B. If the password-generating algorithm gets to be known, the entire system is in jeopardy.
- C. Passwords are more vulnerable to brute force and dictionary attacks.
- D. Passwords are harder to guess for attackers.

Answer: C

Explanation:

Users tend to choose easier to remember passwords. System-generated passwords can provide stronger, harder to guess passwords. Since they are based on rules provided by the administrator, they can include combinations of uppercase/lowercase letters, numbers and special characters, making them less vulnerable to brute force and dictionary attacks. One danger is that they are also harder to remember for users, who will tend to write them down, making them more vulnerable to anyone having access to the user's desk. Another danger with system-generated passwords is that if the password-generating algorithm gets to be known, the entire system is in jeopardy.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, July 1992 (page 64).

NEW QUESTION 166

- (Topic 1)

How are memory cards and smart cards different?

- A. Memory cards normally hold more memory than smart cards
- B. Smart cards provide a two-factor authentication whereas memory cards don't
- C. Memory cards have no processing power
- D. Only smart cards can be used for ATM cards

Answer: C

Explanation:

The main difference between memory cards and smart cards is their capacity to process information. A memory card holds information but cannot process information. A smart card holds information and has the necessary hardware and software to actually process that information.

A memory card holds a user's authentication information, so that this user needs only type in a user ID or PIN and presents the memory card to the system. If the entered information and the stored information match and are approved by an authentication service, the user is successfully authenticated.

A common example of a memory card is a swipe card used to provide entry to a building. The user enters a PIN and swipes the memory card through a card reader. If this is the correct combination, the reader flashes green and the individual can open the door and enter the building.

Memory cards can also be used with computers, but they require a reader to process the information. The reader adds cost to the process, especially when one is needed for every computer. Additionally, the overhead of PIN and card generation adds additional overhead and complexity to the whole authentication process. However, a memory card provides a more secure authentication method than using only a password because the attacker would need to obtain the card and know the correct PIN.

Administrators and management need to weigh the costs and benefits of a memory card implementation as well as the security needs of the organization to determine if it is the right authentication mechanism for their environment.

One of the most prevalent weaknesses of memory cards is that data stored on the card are not protected. Unencrypted data on the card (or stored on the magnetic strip) can be extracted or copied. Unlike a smart card, where security controls and logic are embedded in the integrated circuit, memory cards do not employ an inherent mechanism to protect the data from exposure.

Very little trust can be associated with confidentiality and integrity of information on the memory cards.

The following answers are incorrect:

"Smart cards provide two-factor authentication whereas memory cards don't" is incorrect. This is not necessarily true. A memory card can be combined with a pin or password to offer two factors authentication where something you have and something you know are used for factors.

"Memory cards normally hold more memory than smart cards" is incorrect. While a memory card may or may not have more memory than a smart card, this is certainly not the best answer to the question.

"Only smart cards can be used for ATM cards" is incorrect. This depends on the decisions made by the particular institution and is not the best answer to the question.

Reference(s) used for this question:

Shon Harris, CISSP All In One, 6th edition, Access Control, Page 199 and also for people using the Kindle edition of the book you can look at Locations 4647-4650.

Schneiter, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition : Access Control ((ISC)2 Press) (Kindle Locations 2124-2139). Auerbach Publications. Kindle Edition.

NEW QUESTION 168

- (Topic 1)

Which access control model is also called Non Discretionary Access Control (NDAC)?

- A. Lattice based access control
- B. Mandatory access control
- C. Role-based access control
- D. Label-based access control

Answer: C

Explanation:

RBAC is sometimes also called non-discretionary access control (NDAC) (as Ferraiolo says "to distinguish it from the policy-based specifics of MAC"). Another model that fits within the NDAC category is Rule-Based Access Control (RuBAC or RBAC). Most of the CISSP books use the same acronym for both models but NIST tend to use a lowercase "u" in between R and B to differentiate the two models.

You can certainly mimic MAC using RBAC but true MAC makes use of Labels which contains the sensitivity of the objects and the categories they belong to. No labels means MAC is not being used.

One of the most fundamental data access control decisions an organization must make is the amount of control it will give system and data owners to specify the level of access users of that data will have. In every organization there is a balancing point between the access controls enforced by organization and system policy and the ability for information owners to determine who can have access based on specific business requirements. The process of translating that balance into a workable access control model can be defined by three general access frameworks:

Discretionary access control Mandatory access control Nondiscretionary access control

A role-based access control (RBAC) model bases the access control authorizations on the roles (or functions) that the user is assigned within an organization. The determination of what roles have access to a resource can be governed by the owner of the data, as with DACs, or applied based on policy, as with MACs.

Access control decisions are based on job function, previously defined and governed by policy, and each role (job function) will have its own access capabilities. Objects associated with a role will inherit privileges assigned to that role. This is also true for groups of users, allowing administrators to simplify access control strategies by assigning users to groups and groups to roles.

There are several approaches to RBAC. As with many system controls, there are variations on how they can be applied within a computer system.

There are four basic RBAC architectures:

1. Non-RBAC: Non-RBAC is simply a user-granted access to data or an application by traditional mapping, such as with ACLs. There are no formal ??roles?? associated with the mappings, other than any identified by the particular user.

2. Limited RBAC: Limited RBAC is achieved when users are mapped to roles within a single application rather than through an organization-wide role structure. Users in a limited RBAC system are also able to access non-RBAC-based applications or data. For example, a user may be assigned to multiple roles within several applications and, in addition, have direct access to another application or system independent of his or her assigned role. The key attribute of limited RBAC is that the role for that user is defined within an application and not necessarily based on the user??s organizational job function.

3. Hybrid RBAC: Hybrid RBAC introduces the use of a role that is applied to multiple applications or systems based on a user??s specific role within the organization. That role is then applied to applications or systems that subscribe to the organization??s role-based model. However, as the term ??hybrid?? suggests, there are instances where the subject may also be assigned to roles defined solely within specific applications, complimenting (or, perhaps, contradicting) the larger, more encompassing organizational role used by other systems.

4. Full RBAC: Full RBAC systems are controlled by roles defined by the organization??s policy and access control infrastructure and then applied to applications and systems across the enterprise. The applications, systems, and associated data apply permissions based on that enterprise definition, and not one defined by a specific application or system. Be careful not to try to make MAC and DAC opposites of each other -- they are two different access control strategies with RBAC being a third strategy that was defined later to address some of the limitations of MAC and DAC.

The other answers are not correct because:

Mandatory access control is incorrect because though it is by definition not discretionary, it is not called "non-discretionary access control." MAC makes use of label to indicate the sensitivity of the object and it also makes use of categories to implement the need to know.

Label-based access control is incorrect because this is not a name for a type of access control but simply a bogus detractor.

Lattice based access control is not adequate either. A lattice is a series of levels and a subject will be granted an upper and lower bound within the series of levels. These levels could be sensitivity levels or they could be confidentiality levels or they could be integrity levels.

Reference(s) used for this question: All in One, third edition, page 165.

Ferraiolo, D., Kuhn, D. & Chandramouli, R. (2003). Role-Based Access Control, p. 18.

Ferraiolo, D., Kuhn, D. (1992). Role-Based Access Controls. http://csrc.nist.gov/rbac/Role_Based_Access_Control-1992.html

Schneiter, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition : Access Control ((ISC)2 Press) (Kindle Locations 1557-1584). Auerbach Publications. Kindle Edition.

Schneiter, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition : Access Control ((ISC)2 Press) (Kindle Locations 1474-1477). Auerbach Publications. Kindle Edition.

NEW QUESTION 172

- (Topic 1)

Which of the following logical access exposures INVOLVES CHANGING data before, or as it is entered into the computer?

- A. Data diddling
- B. Salami techniques

- C. Trojan horses
- D. Viruses

Answer: A

Explanation:

It involves changing data before , or as it is entered into the computer or in

other words , it refers to the alteration of the existing data. The other answers are incorrect because :

Salami techniques : A salami attack is the one in which an attacker commits several small crimes with the hope that the overall larger crime will go unnoticed.

Trojan horses: A Trojan Horse is a program that is disguised as another program. Viruses:A Virus is a small application , or a string of code , that infects applications.

Reference: Shon Harris , AIO v3

Chapter - 11: Application and System Development, Page : 875-880 Chapter - 10: Law, Investigation and Ethics , Page : 758-759

NEW QUESTION 177

- (Topic 1)

Which access control model would a lattice-based access control model be an example of?

- A. Mandatory access control.
- B. Discretionary access control.
- C. Non-discretionary access control.
- D. Rule-based access control.

Answer: A

Explanation:

In a lattice model, there are pairs of elements that have the least upper bound of values and greatest lower bound of values. In a Mandatory Access Control (MAC) model, users and data owners do not have as much freedom to determine who can access files.

TIPS FROM CLEMENT

Mandatory Access Control is in place whenever you have permissions that are being imposed on the subject and the subject cannot arbitrarily change them. When the subject/owner of the file can change permissions at will, it is discretionary access control.

Here is a breakdown largely based on explanations provided by Doug Landoll. I am reproducing below using my own word and not exactly how Doug explained it:

FIRST: The Lattice

A lattice is simply an access control tool usually used to implement Mandatory Access Control (MAC) and it could also be used to implement RBAC but this is not as common. The lattice model can be used for Integrity level or file permissions as well. The lattice has a least upper bound and greatest lower bound. It makes use of pair of elements such as the subject security clearance pairing with the object sensitivity label.

SECOND: DAC (Discretionary Access Control)

Let's get into Discretionary Access Control: It is an access control method where the owner (read the creator of the object) will decide who has access at his own discretion. As we all know, users are sometimes insane. They will share their files with other users based on their identity but nothing prevent the user from further sharing it with other users on the network. Very quickly you loose control on the flow of information and who has access to what. It is used in small and friendly environment where a low level of security is all that is required.

THIRD: MAC (Mandatory Access Control)

All of the following are forms of Mandatory Access Control: Mandatory Access control (MAC) (Implemented using the lattice)

You must remember that MAC makes use of Security Clearance for the subject and also Labels will be assigned to the objects. The clearance of the Subject must dominate (be equal or higher) the clearance of the Object being accessed. The label attached to the object will indicate the sensitivity level and the categories the object belongs to. The categories are used to implement the Need to Know.

All of the following are forms of Non Discretionary Access Control:

Role Based Access Control (RBAC)

Rule Based Access Control (Think Firewall in this case)

The official ISC2 book says that RBAC (synonymous with Non Discretionary Access Control) is a form of DAC but they are simply wrong. RBAC is a form of Non Discretionary Access Control. Non Discretionary DOES NOT equal mandatory access control as there is no labels and clearance involved.

I hope this clarifies the whole drama related to what is what in the world of access control. In the same line of taught, you should be familiar with the difference between Explicit

permission (the user has his own profile) versus Implicit (the user inherit permissions by being a member of a role for example).

The following answers are incorrect:

Discretionary access control. Is incorrect because in a Discretionary Access Control (DAC) model, access is restricted based on the authorization granted to the users. It is identity based access control only. It does not make use of a lattice.

Non-discretionary access control. Is incorrect because Non-discretionary Access Control (NDAC) uses the role-based access control method to determine access rights and permissions. It is often times used as a synonym to RBAC which is Role Based Access Control. The user inherit permission from the role when they are assigned into the role. This type of access could make use of a lattice but could also be implemented without the use of a lattice in some case. Mandatory Access Control was a better choice than this one, but RBAC could also make use of a lattice. The BEST answer was MAC.

Rule-based access control. Is incorrect because it is an example of a Non-discretionary Access Control (NDAC) access control mode. You have rules that are globally applied to all users. There is no such thing as a lattice being use in Rule-Based Access Control.

References:

AIOv3 Access Control (pages 161 - 168)

AIOv3 Security Models and Architecture (pages 291 - 293)

NEW QUESTION 182

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

SSCP Practice Exam Features:

- * SSCP Questions and Answers Updated Frequently
- * SSCP Practice Questions Verified by Expert Senior Certified Staff
- * SSCP Most Realistic Questions that Guarantee you a Pass on Your First Try
- * SSCP Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The SSCP Practice Test Here](#)