



**ISC2**

## **Exam Questions SSCP**

System Security Certified Practitioner (SSCP)

### NEW QUESTION 1

- (Topic 1)

Which type of password token involves time synchronization?

- A. Static password tokens
- B. Synchronous dynamic password tokens
- C. Asynchronous dynamic password tokens
- D. Challenge-response tokens

**Answer: B**

#### Explanation:

Synchronous dynamic password tokens generate a new unique password value at fixed time intervals, so the server and token need to be synchronized for the password to be accepted.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 37).

Also check out: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, chapter 4: Access Control (page 136).

### NEW QUESTION 2

- (Topic 1)

Which access control model achieves data integrity through well-formed transactions and separation of duties?

- A. Clark-Wilson model
- B. Biba model
- C. Non-interference model
- D. Sutherland model

**Answer: A**

#### Explanation:

The Clark-Wilson model differs from other models that are subject- and object- oriented by introducing a third access element programs resulting in what is called an access triple, which prevents unauthorized users from modifying data or programs. The Biba model uses objects and subjects and addresses integrity based on a hierarchical

lattice of integrity levels. The non-interference model is related to the information flow model with restrictions on the information flow. The Sutherland model approaches integrity by focusing on the problem of inference.

Source: ANDRESS, Mandy, Exam Cram CISSP, Coriolis, 2001, Chapter 2: Access Control Systems and Methodology (page 12).

And: KRAUSE, Micki & TIPTON, Harold F., Handbook of Information Security Management, CRC Press, 1997, Domain 1: Access Control.

### NEW QUESTION 3

- (Topic 1)

Physical security is accomplished through proper facility construction, fire and water

protection, anti-theft mechanisms, intrusion detection systems, and security procedures that are adhered to and enforced. Which of the following is not a component that achieves this type of security?

- A. Administrative control mechanisms
- B. Integrity control mechanisms
- C. Technical control mechanisms
- D. Physical control mechanisms

**Answer: B**

#### Explanation:

Integrity Controls Mechanisms are not part of physical security. All of the other detractors were correct this one was the wrong one that does not belong to Physical Security. Below you have more details extracted from the SearchSecurity web site: Information security depends on the security and management of the physical space in which computer systems operate. Domain 9 of the CISSP exam's Common Body of Knowledge addresses the challenges of securing the physical space, its systems and the people who work within it by use of administrative, technical and physical controls. The following QUESTION NO: s are covered:

Facilities management: The administrative processes that govern the maintenance and protection of the physical operations space, from site selection through emergency response.

Risks, issues and protection strategies: Risk identification and the selection of security protection components.

Perimeter security: Typical physical protection controls.

Facilities management

Facilities management is a complex component of corporate security that ranges from the planning of a secure physical site to the management of the physical information system environment. Facilities management responsibilities include site selection and physical security planning (i.e. facility construction, design and layout, fire and water damage protection, antitheft mechanisms, intrusion detection and security procedures.) Protections must extend to both people and assets. The necessary level of protection depends on the value of the assets and data. CISSP® candidates must learn the concept of critical-path analysis as a means of determining a component's business function criticality relative to the cost of operation and replacement. Furthermore, students need to gain an understanding of the optimal location and physical attributes of a secure facility. Among the QUESTION NO: s covered in this domain are site inspection, location, accessibility and obscurity, considering the area crime rate, and the likelihood of natural hazards such as floods or earthquakes.

This domain also covers the quality of construction material, such as its protective qualities and load capabilities, as well as how to lay out the structure to minimize risk of forcible entry and accidental damage. Regulatory compliance is also touched on, as is preferred proximity to civil protection services, such as fire and police stations. Attention is given to computer and equipment rooms, including their location, configuration (entrance/egress requirements) and their proximity to wiring distribution centers at the site.

Physical risks, issues and protection strategies

An overview of physical security risks includes risk of theft, service interruption, physical damage, compromised system integrity and unauthorized disclosure of information. Interruptions to business can manifest due to loss of power, services, telecommunications connectivity and water supply. These can also seriously compromise electronic security monitoring alarm/response devices. Backup options are also covered in this domain, as is a strategy for quantifying the risk exposure by simple formula.

Investment in preventive security can be costly. Appropriate redundancy of people skills, systems and infrastructure must be based on the criticality of the data and

assets to be preserved. Therefore a strategy is presented that helps determine the selection of cost appropriate controls. Among the QUESTION NO: s covered in this domain are regulatory and legal requirements, common standard security protections such as locks and fences, and the importance of establishing service level agreements for maintenance and disaster support. Rounding out the optimization approach are simple calculations for determining mean time between failure and mean time to repair (used to estimate average equipment life expectancy) ?? essential for estimating the cost/benefit of purchasing and maintaining redundant equipment.

As the lifeblood of computer systems, special attention is placed on adequacy, quality and protection of power supplies. CISSP candidates need to understand power supply concepts and terminology, including those for quality (i.e. transient noise vs. clean power); types of interference (EMI and RFI); and types of interruptions such as power excess by spikes and surges, power loss by fault or blackout, and power degradation from sags and brownouts. A simple formula is presented for determining the total cost per hour for backup power. Proving power reliability through testing is recommended and the advantages of three power protection approaches are discussed (standby UPS, power line conditioners and backup sources) including minimum requirements for primary and alternate power provided.

Environmental controls are explored in this domain, including the value of positive pressure water drains and climate monitoring devices used to control temperature, humidity and reduce static electricity. Optimal temperatures and humidity settings are provided.

Recommendations include strict procedures during emergencies, preventing typical risks (such as blocked fans), and the use of antistatic armbands and hygrometers. Positive pressurization for proper ventilation and monitoring for air born contaminants is stressed.

The pros and cons of several detection response systems are deeply explored in this domain. The concept of combustion, the classes of fire and fire extinguisher ratings are detailed. Mechanisms behind smoke-activated, heat-activated and flame-activated devices and Automatic Dial-up alarms are covered, along with their advantages, costs and shortcomings. Types of fire sources are distinguished and the effectiveness of fire suppression methods for each is included. For instance, Halon and its approved replacements are covered, as are the advantages and the inherent risks to equipment of the use of water sprinklers.

Administrative controls

The physical security domain also deals with administrative controls applied to physical sites and assets. The need for skilled personnel, knowledge sharing between them, separation of duties, and appropriate oversight in the care and maintenance of equipment and environments is stressed. A list of management duties including hiring checks, employee maintenance activities and recommended termination procedures is offered. Emergency measures include accountability for evacuation and system shutdown procedures, integration with disaster and business continuity plans, assuring documented procedures are easily available during different types of emergencies, the scheduling of periodic equipment testing, administrative reviews of documentation, procedures and recovery plans, responsibilities delegation, and personnel training and drills.

Perimeter security

Domain nine also covers the devices and techniques used to control access to a space. These include access control devices, surveillance monitoring, intrusion detection and corrective actions. Specifications are provided for optimal external boundary protection, including fence heights and placement, and lighting placement and types. Selection of door types and lock characteristics are covered. Surveillance methods and intrusion-detection methods are explained, including the use of video monitoring, guards, dogs, proximity detection systems, photoelectric/photometric systems, wave pattern devices, passive infrared systems, and sound and motion detectors, and current flow sensitivity devices that specifically address computer theft. Room lock types ?? both preset and cipher locks (and their variations) -- device locks, such as portable laptop locks, lockable server bays, switch control locks and slot locks, port controls, peripheral switch controls and cable trap locks are also covered. Personal access control methods used to identify authorized users for site entry are covered at length, noting social engineering risks such as piggybacking. Wireless proximity devices, both user access and system sensing readers are covered (i.e. transponder based, passive devices and field powered devices) in this domain.

Now that you've been introduced to the key concepts of Domain 9, watch the Domain 9, Physical Security video

Return to the CISSP Essentials Security School main page

See all SearchSecurity.com's resources on CISSP certification training Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 280.

#### NEW QUESTION 4

- (Topic 1)

What is the main concern with single sign-on?

- A. Maximum unauthorized access would be possible if a password is disclosed.
- B. The security administrator's workload would increase.
- C. The users' password would be too hard to remember.
- D. User access rights would be increased.

**Answer:** A

#### Explanation:

A major concern with Single Sign-On (SSO) is that if a user's ID and password are compromised, the intruder would have access to all the systems that the user was authorized for.

The following answers are incorrect:

The security administrator's workload would increase. Is incorrect because the security administrator's workload would decrease and not increase. The admin would not be responsible for maintaining multiple user accounts just the one.

The users' password would be too hard to remember. Is incorrect because the users would have less passwords to remember.

User access rights would be increased. Is incorrect because the user access rights would not be any different than if they had to log into systems manually.

#### NEW QUESTION 5

- (Topic 1)

Which of the following is implemented through scripts or smart agents that replays the users multiple log-ins against authentication servers to verify a user's identity which permit access to system services?

- A. Single Sign-On
- B. Dynamic Sign-On
- C. Smart cards
- D. Kerberos

**Answer:** A

#### Explanation:

SSO can be implemented by using scripts that replay the users multiple log- ins against authentication servers to verify a user's identity and to permit access to system services.

Single Sign on was the best answer in this case because it would include Kerberos. When you have two good answers within the 4 choices presented you must select the

BEST one. The high level choice is always the best. When one choice would include the other one that would be the best as well.

Reference(s) used for this question:

### NEW QUESTION 6

- (Topic 1)

Crime Prevention Through Environmental Design (CPTED) is a discipline that:

- A. Outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior.
- B. Outlines how the proper design of the logical environment can reduce crime by directly affecting human behavior.
- C. Outlines how the proper design of the detective control environment can reduce crime by directly affecting human behavior.
- D. Outlines how the proper design of the administrative control environment can reduce crime by directly affecting human behavior.

**Answer:** A

#### Explanation:

Crime Prevention Through Environmental Design (CPTED) is a discipline that outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior. It provides guidance about lost and crime prevention through proper facility construction and environmental components and procedures.

CPTED concepts were developed in the 1960s. They have been expanded upon and have matured as our environments and crime types have evolved. CPTED has been used not just to develop corporate physical security programs, but also for large-scale activities such as development of neighborhoods, towns, and cities. It addresses landscaping, entrances, facility and neighborhood layouts, lighting, road placement, and traffic circulation patterns. It looks at microenvironments, such as offices and rest-rooms, and macroenvironments, like campuses and cities.

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 435). McGraw- Hill. Kindle Edition.

and

CPTED Guide Book

### NEW QUESTION 7

- (Topic 1)

What refers to legitimate users accessing networked services that would normally be restricted to them?

- A. Spoofing
- B. Piggybacking
- C. Eavesdropping
- D. Logon abuse

**Answer:** D

#### Explanation:

Unauthorized access of restricted network services by the circumvention of security access controls is known as logon abuse. This type of abuse refers to users who may be internal to the network but access resources they would not normally be allowed. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3:

Telecommunications and Network Security (page 74).

### NEW QUESTION 8

- (Topic 1)

Which of the following biometric characteristics cannot be used to uniquely authenticate an individual's identity?

- A. Retina scans
- B. Iris scans
- C. Palm scans
- D. Skin scans

**Answer:** D

#### Explanation:

The following are typical biometric characteristics that are used to uniquely authenticate an individual's identity:

Fingerprints Retina scans Iris scans Facial scans Palm scans Hand geometry Voice

Handwritten signature dynamics

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 39.

And: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 127-131).

### NEW QUESTION 9

- (Topic 1)

To control access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up:

- A. Access Rules
- B. Access Matrix
- C. Identification controls
- D. Access terminal

**Answer:** A

#### Explanation:

Controlling access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up access rules.

These rules can be classified into three access control models: Mandatory, Discretionary, and Non-Discretionary.

An access matrix is one of the means used to implement access control.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

#### NEW QUESTION 10

- (Topic 1)

Which of the following is a trusted, third party authentication protocol that was developed under Project Athena at MIT?

- A. Kerberos
- B. SESAME
- C. KryptoKnight
- D. NetSP

**Answer:** A

#### Explanation:

Kerberos is a trusted, third party authentication protocol that was developed under Project Athena at MIT.

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. A free implementation of this protocol is available from the Massachusetts Institute of Technology. Kerberos is available in many commercial products as well.

The Internet is an insecure place. Many of the protocols used in the Internet do not provide any security. Tools to "sniff" passwords off of the network are in common use by systems crackers. Thus, applications which send an unencrypted password over the network are extremely vulnerable. Worse yet, other client/server applications rely on the client program to be "honest" about the identity of the user who is using it. Other applications rely on the client to restrict its activities to those which it is allowed to do, with no other enforcement by the server.

Some sites attempt to use firewalls to solve their network security problems. Unfortunately, firewalls assume that "the bad guys" are on the outside, which is often a very bad

assumption. Most of the really damaging incidents of computer crime are carried out by insiders. Firewalls also have a significant disadvantage in that they restrict how your users can use the Internet. (After all, firewalls are simply a less extreme example of the dictum that there is nothing more secure than a computer which is not connected to the network --- and powered off!) In many places, these restrictions are simply unrealistic and unacceptable.

Kerberos was created by MIT as a solution to these network security problems. The Kerberos protocol uses strong cryptography so that a client can prove its identity to a server (and vice versa) across an insecure network connection. After a client and server have used Kerberos to prove their identity, they can also encrypt all of their communications to assure privacy and data integrity as they go about their business.

Kerberos is freely available from MIT, under a copyright permission notice very similar to the one used for the BSD operating and X11 Windowing system. MIT provides Kerberos in source form, so that anyone who wishes to use it may look over the code for themselves and assure themselves that the code is trustworthy. In addition, for those who prefer to rely on a professional supported product, Kerberos is available as a product from many different vendors.

In summary, Kerberos is a solution to your network security problems. It provides the tools of authentication and strong cryptography over the network to help you secure your information systems across your entire enterprise. We hope you find Kerberos as useful as it has been to us. At MIT, Kerberos has been invaluable to our Information/Technology architecture.

KryptoKnight is a Peer to Peer authentication protocol incorporated into the NetSP product from IBM.

SESAME is an authentication and access control protocol, that also supports communication confidentiality and integrity. It provides public key based authentication along with the Kerberos style authentication, that uses symmetric key cryptography. Sesame supports the Kerberos protocol and adds some security extensions like public key based authentication and an ECMA-style Privilege Attribute Service. The complete Sesame protocol is a two step process. In the first step, the client successfully authenticates itself to the Authentication Server and obtains a ticket that can be presented to the Privilege Attribute Server. In the second step, the initiator obtains proof of his access rights in the form of Privilege Attributes Certificate (PAC). The PAC is a specific form of Access Control Certificate as defined in the ECMA-219 document. This document describes the extensions to Kerberos for public key based authentication as adopted in Sesame. SESAME, KryptoKnight, and NetSP never took off and the protocols are no longer commonly used.

References:

<http://www.cmf.nrl.navy.mil/CCS/people/kenh/kerberos-faq.html#whatis> and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

#### NEW QUESTION 10

- (Topic 1)

Which of the following is an example of a passive attack?

- A. Denying services to legitimate users
- B. Shoulder surfing
- C. Brute-force password cracking
- D. Smurfing

**Answer:** B

#### Explanation:

Shoulder surfing is a form of a passive attack involving stealing passwords, personal identification numbers or other confidential information by looking over someone's shoulder. All other forms of attack are active attacks, where a threat makes a modification to the system in an attempt to take advantage of a vulnerability.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, chapter 3: Security Management Practices (page 63).

#### NEW QUESTION 14

- (Topic 1)

In the Bell-LaPadula model, the Star-property is also called:

- A. The simple security property
- B. The confidentiality property
- C. The confinement property
- D. The tranquility property

**Answer:** B

#### Explanation:

The Bell-LaPadula model focuses on data confidentiality and access to classified information, in contrast to the Biba Integrity Model which describes rules for the protection of data integrity.

In this formal model, the entities in an information system are divided into subjects and objects.

The notion of a "secure state" is defined, and it is proven that each state transition preserves security by moving from secure state to secure state, thereby proving that the system satisfies the security objectives of the model.

The Bell-LaPadula model is built on the concept of a state machine with a set of allowable states in a system. The transition from one state to another state is defined by transition functions.

A system state is defined to be "secure" if the only permitted access modes of subjects to objects are in accordance with a security policy. To determine whether a specific access mode is allowed, the clearance of a subject is compared to the classification of the object (more precisely, to the combination of classification and set of compartments, making up the security level) to determine if the subject is authorized for the specific access mode. The clearance/classification scheme is expressed in terms of a lattice. The model defines two mandatory access control (MAC) rules and one discretionary access control (DAC) rule with three security properties:

The Simple Security Property - a subject at a given security level may not read an object at a higher security level (no read-up).

The property (read "star"-property) - a subject at a given security level must not write to any object at a lower security level (no write-down). The property is also known as the Confinement property.

The Discretionary Security Property - use an access control matrix to specify the discretionary access control.

The transfer of information from a high-sensitivity document to a lower-sensitivity document may happen in the Bell-LaPadula model via the concept of trusted subjects. Trusted Subjects are not restricted by the property. Untrusted subjects are.

Trusted Subjects must be shown to be trustworthy with regard to the security policy. This security model is directed toward access control and is characterized by the phrase: "no read up, no write down." Compare the Biba model, the Clark-Wilson model and the Chinese Wall.

With Bell-LaPadula, users can create content only at or above their own security level (i.e. secret researchers can create secret or top-secret files but may not create public files; no write-down). Conversely, users can view content only at or below their own security level (i.e. secret researchers can view public or secret files, but may not view top-secret files; no read-up).

Strong Property

The Strong Property is an alternative to the Property in which subjects may write to objects with only a matching security level. Thus, the write-up operation permitted in the usual Property is not present, only a write-to-same level operation. The Strong Property is usually discussed in the context of multilevel database management systems and is motivated by integrity concerns.

Tranquility principle

The tranquility principle of the Bell-LaPadula model states that the classification of a subject or object does not change while it is being referenced. There are two forms to the tranquility principle: the "principle of strong tranquility" states that security levels do not change during the normal operation of the system and the "principle of weak tranquility" states that security levels do not change in a way that violates the rules of a given security policy.

Another interpretation of the tranquility principles is that they both apply only to the period of time during which an operation involving an object or subject is occurring. That is, the strong tranquility principle means that an object's security level/label will not change during an operation (such as read or write); the weak tranquility principle means that an object's security level/label may change in a way that does not violate the security policy during an operation.

Reference(s) used for this question: [http://en.wikipedia.org/wiki/Biba\\_Model](http://en.wikipedia.org/wiki/Biba_Model)

[http://en.wikipedia.org/wiki/Mandatory\\_access\\_control](http://en.wikipedia.org/wiki/Mandatory_access_control) [http://en.wikipedia.org/wiki/Discretionary\\_access\\_control](http://en.wikipedia.org/wiki/Discretionary_access_control) [http://en.wikipedia.org/wiki/Clark-Wilson\\_model](http://en.wikipedia.org/wiki/Clark-Wilson_model)

[http://en.wikipedia.org/wiki/Brewer\\_and\\_Nash\\_model](http://en.wikipedia.org/wiki/Brewer_and_Nash_model)

#### NEW QUESTION 16

- (Topic 1)

Which of the following centralized access control mechanisms is the least appropriate for mobile workers accessing the corporate network over analog lines?

- A. TACACS
- B. Call-back
- C. CHAP
- D. RADIUS

**Answer: B**

#### Explanation:

Call-back allows for a distant user connecting into a system to be called back at a number already listed in a database of trusted users. The disadvantage of this system is that the user must be at a fixed location whose phone number is known to the authentication server. Being mobile workers, users are accessing the system from multiple

locations, making call-back inappropriate for them.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 44).

#### NEW QUESTION 20

- (Topic 1)

What is the most critical characteristic of a biometric identifying system?

- A. Perceived intrusiveness
- B. Storage requirements
- C. Accuracy
- D. Scalability

**Answer: C**

#### Explanation:

Accuracy is the most critical characteristic of a biometric identifying verification system.

Accuracy is measured in terms of false rejection rate (FRR, or type I errors) and false acceptance rate (FAR or type II errors).

The Crossover Error Rate (CER) is the point at which the FRR equals the FAR and has become the most important measure of biometric system accuracy.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition (volume 1), 2000, CRC Press, Chapter 1, Biometric Identification (page 9).

#### NEW QUESTION 22

- (Topic 1)

The number of violations that will be accepted or forgiven before a violation record is produced is called which of the following?

- A. clipping level
- B. acceptance level
- C. forgiveness level
- D. logging level

**Answer: A**

#### Explanation:

The correct answer is "clipping level". This is the point at which a system decides to take some sort of action when an action repeats a preset number of times. That action may be to log the activity, lock a user account, temporarily close a port, etc.

Example: The most classic example of a clipping level is failed login attempts. If you have a system configured to lock a user's account after three failed login attempts, that is the "clipping level".

The other answers are not correct because:

Acceptance level, forgiveness level, and logging level are nonsensical terms that do not exist (to my knowledge) within network security.

Reference:

Official ISC2 Guide - The term "clipping level" is not in the glossary or index of that book. I cannot find it in the text either. However, I'm quite certain that it would be considered part of the CBK, despite its exclusion from the Official Guide.

All in One Third Edition page: 136 - 137

### NEW QUESTION 23

- (Topic 1)

Which of the following is NOT a type of motion detector?

- A. Photoelectric sensor
- B. Passive infrared sensors
- C. Microwave Sensor.
- D. Ultrasonic Sensor.

**Answer:** A

#### Explanation:

A photoelectric sensor does not "directly" sense motion there is a narrow beam that won't set off the sensor unless the beam is broken. Photoelectric sensors, along with dry contact switches, are a type of perimeter intrusion detector.

All of the other answers are valid types of motion detectors types.

The content below on the different types of sensors is from Wikipedia: Indoor Sensors

These types of sensors are designed for indoor use. Outdoor use would not be advised due to false alarm vulnerability and weather durability. Passive infrared detectors



C:\Users\MCS\Desktop\1.jpg Passive Infrared Sensor

The passive infrared detector (PIR) is one of the most common detectors found in household and small business environments because it offers affordable and reliable functionality. The term passive means the detector is able to function without the need to generate and radiate its own energy (unlike ultrasonic and microwave volumetric intrusion detectors that are ??active?? in operation). PIRs are able to distinguish if an infrared emitting object is present by first learning the ambient temperature of the monitored space and then detecting a change in the temperature caused by the presence of an object. Using the principle of differentiation, which is a check of presence or nonpresence, PIRs verify if an intruder or object is actually there. Creating individual zones of detection where each zone comprises one or more layers can achieve differentiation. Between the zones there are areas of no sensitivity (dead zones) that are used by the sensor for comparison.

#### Ultrasonic detectors

Using frequencies between 15 kHz and 75 kHz, these active detectors transmit ultrasonic sound waves that are inaudible to humans. The Doppler shift principle is the underlying method of operation, in which a change in frequency is detected due to object motion. This is caused when a moving object changes the frequency of sound waves around it. Two conditions must occur to successfully detect a Doppler shift event:

There must be motion of an object either towards or away from the receiver.

The motion of the object must cause a change in the ultrasonic frequency to the receiver relative to the transmitting frequency.

The ultrasonic detector operates by the transmitter emitting an ultrasonic signal into the area to be protected. The sound waves are reflected by solid objects (such as the surrounding floor, walls and ceiling) and then detected by the receiver. Because ultrasonic waves are transmitted through air, then hard-surfaced objects tend to reflect most of the ultrasonic energy, while soft surfaces tend to absorb most energy.

When the surfaces are stationary, the frequency of the waves detected by the receiver will be equal to the transmitted frequency. However, a change in frequency will occur as a result of the Doppler principle, when a person or object is moving towards or away from the detector. Such an event initiates an alarm signal. This technology is considered obsolete by many alarm professionals, and is not actively installed.

#### Microwave detectors

This device emits microwaves from a transmitter and detects any reflected microwaves or reduction in beam intensity using a receiver. The transmitter and receiver are usually combined inside a single housing (monostatic) for indoor applications, and separate housings (bistatic) for outdoor applications. To reduce false alarms this type of detector is usually combined with a passive infrared detector or "Dualtec" alarm.

Microwave detectors respond to a Doppler shift in the frequency of the reflected energy, by a phase shift, or by a sudden reduction of the level of received energy. Any of these effects may indicate motion of an intruder.

#### Photo-electric beams

Photoelectric beam systems detect the presence of an intruder by transmitting visible or infrared light beams across an area, where these beams may be obstructed. To improve the detection surface area, the beams are often employed in stacks of two or more. However, if an intruder is aware of the technology's presence, it can be avoided. The technology can be an effective long-range detection system, if installed in stacks of three or more where the transmitters and receivers are staggered to create a fence-like barrier. Systems are available for both internal and external applications. To prevent a clandestine attack using a secondary light source being used to hold the detector in a 'sealed' condition whilst an intruder passes through, most systems use and detect a modulated light source.


#### Glass break detectors

The glass break detector may be used for internal perimeter building protection. When glass breaks it generates sound in a wide band of frequencies. These can range from infrasonic, which is below 20 hertz (Hz) and can not be heard by the human ear, through the audio band from 20 Hz to 20 kHz which humans can hear, right up to ultrasonic, which is above 20 kHz and again cannot be heard. Glass break acoustic detectors are mounted in close proximity to the glass panes and

listen for sound frequencies associated with glass breaking. Seismic glass break detectors are different in that they are installed on the glass pane. When glass breaks it produces specific shock frequencies which travel through the glass and often through the window frame and the surrounding walls and ceiling. Typically, the most intense frequencies generated are between 3 and 5 kHz, depending on the type of glass and the presence of a plastic interlayer. Seismic glass break detectors feel these shock frequencies and in turn generate an alarm condition.

The more primitive detection method involves gluing a thin strip of conducting foil on the inside of the glass and putting low-power electrical current through it. Breaking the glass is practically guaranteed to tear the foil and break the circuit.

Smoke, heat, and carbon monoxide detectors

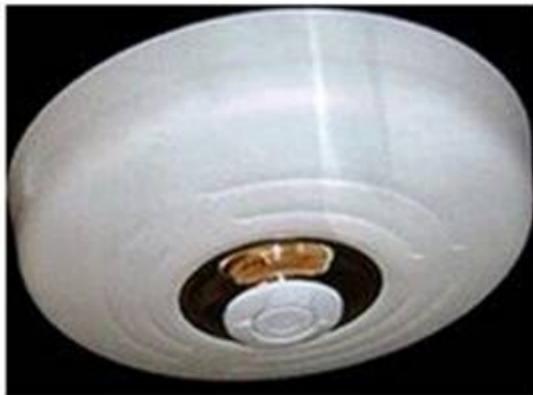

C:\Users\MCS\Desktop\1.jpg Heat Detection System

Most systems may also be equipped with smoke, heat, and/or carbon monoxide detectors. These are also known as 24 hour zones (which are on at all times). Smoke detectors and heat detectors protect from the risk of fire and carbon monoxide detectors protect from the risk of carbon monoxide. Although an intruder alarm panel may also have these detectors connected, it may not meet all the local fire code requirements of a fire alarm system.

Other types of volumetric sensors could be:

Active Infrared

Passive Infrared/Microwave combined Radar

Accoustical Sensor/Audio Vibration Sensor (seismic) Air Turbulence

#### NEW QUESTION 28

- (Topic 1)

Which of the following is NOT a system-sensing wireless proximity card?

- A. magnetically striped card
- B. passive device
- C. field-powered device
- D. transponder

**Answer:** A

#### Explanation:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, page 342.

#### NEW QUESTION 31

- (Topic 1)

A network-based vulnerability assessment is a type of test also referred to as:

- A. An active vulnerability assessment.
- B. A routing vulnerability assessment.
- C. A host-based vulnerability assessment.
- D. A passive vulnerability assessment.

**Answer:** A

#### Explanation:

A network-based vulnerability assessment tool/system either re-enacts system attacks, noting and recording responses to the attacks, or probes different targets to infer weaknesses from their responses.

Since the assessment is actively attacking or scanning targeted systems, network-based vulnerability assessment systems are also called active vulnerability systems.

There are mostly two main types of test:

**PASSIVE:** You don't send any packet or interact with the remote target. You make use of public database and other techniques to gather information about your target.

**ACTIVE:** You do send packets to your target, you attempt to stimulate response which will help you in gathering information about hosts that are alive, services runnings, port state, and more.

See example below of both types of attacks:

Eavesdropping and sniffing data as it passes over a network are considered passive attacks because the attacker is not affecting the protocol, algorithm, key, message, or any parts of the encryption system. Passive attacks are hard to detect, so in most cases methods are put in place to try to prevent them rather than to detect and stop them.

Altering messages, modifying system files, and masquerading as another individual are acts that are considered active attacks because the attacker is actually doing something instead of sitting back and gathering data. Passive attacks are usually used to gain information prior to carrying out an active attack.

**IMPORTANT NOTE:**

On the commercial vendors will sometimes use different names for different types of scans. However, the exam is product agnostic. They do not use vendor terms but general terms. Experience could trick you into selecting the wrong choice sometimes. See feedback from Jason below:

"I am a system security analyst. It is my daily duty to perform system vulnerability analysis. We use Nessus and Retina (among other tools) to perform our network based vulnerability scanning. Both commercially available tools refer to a network based vulnerability scan as a "credentialed" scan. Without credentials, the scan tool cannot login to the system being scanned, and as such will only receive a port scan to see what ports are open and exploitable"

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 865). McGraw- Hill. Kindle Edition.

and  
 DUPUIS, Clement, Access Control Systems and Methodology CISSP Open Study Guide, version 1.0, march 2002 (page 97).

### NEW QUESTION 32

- (Topic 1)

Which of the following access control models is based on sensitivity labels?

- A. Discretionary access control
- B. Mandatory access control
- C. Rule-based access control
- D. Role-based access control

**Answer: B**

#### Explanation:

Access decisions are made based on the clearance of the subject and the sensitivity label of the object.

Example: Eve has a "Secret" security clearance and is able to access the "Mugwump Missile Design Profile" because its sensitivity label is "Secret." She is denied access to the "Presidential Toilet Tissue Formula" because its sensitivity label is "Top Secret."

The other answers are not correct because:

Discretionary Access Control is incorrect because in DAC access to data is determined by the data owner. For example, Joe owns the "Secret Chili Recipe" and grants read access to Charles.

Role Based Access Control is incorrect because in RBAC access decisions are made based on the role held by the user. For example, Jane has the role "Auditor" and that role includes read permission on the "System Audit Log."

Rule Based Access Control is incorrect because it is a form of MAC. A good example would be a Firewall where rules are defined and apply to anyone connecting through the firewall.

References:

All in One third edition, page 164. Official ISC2 Guide page 187.

### NEW QUESTION 36

- (Topic 1)

What does the Clark-Wilson security model focus on?

- A. Confidentiality
- B. Integrity
- C. Accountability
- D. Availability

**Answer: B**

#### Explanation:

The Clark-Wilson model addresses integrity. It incorporates mechanisms to enforce internal and external consistency, a separation of duty, and a mandatory integrity policy.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 205).

### NEW QUESTION 38

- (Topic 1)

Which of the following statements pertaining to biometrics is FALSE?

- A. User can be authenticated based on behavior.
- B. User can be authenticated based on unique physical attributes.
- C. User can be authenticated by what he knows.
- D. A biometric system's accuracy is determined by its crossover error rate (CER).

**Answer: C**

#### Explanation:

As this is not a characteristic of Biometrics this is the right choice for this question. This is one of the three basic way authentication can be performed and it is not related to Biometrics. Example of something you know would be a password or PIN for example.

Please make a note of the negative 'FALSE' within the question. This question may seem tricky to some of you but you would be amazed at how many people cannot deal with negative questions. There will be a few negative questions within the real exam, just like this one the keyword NOT or FALSE will be in Uppercase to clearly indicate that it is negative.

Biometrics verifies an individual's identity by analyzing a unique personal attribute or behavior, which is one of the most effective and accurate methods of performing authentication (one to one matching) or identification (a one to many matching).

A biometric system scans an attribute or behavior of a person and compares it to a template store within an authentication server database, such template would be created in an earlier enrollment process. Because this system inspects the grooves of a person's fingerprint, the pattern of someone's retina, or the pitches of someone's voice, it has to be extremely sensitive.

The system must perform accurate and repeatable measurements of anatomical or physiological characteristics. This type of sensitivity can easily cause false positives or false negatives. The system must be calibrated so that these false positives and false negatives occur infrequently and the results are as accurate as possible.

There are two types of failures in biometric identification:

False Rejection also called False Rejection Rate (FRR) ?? The system fail to recognize a legitimate user. While it could be argued that this has the effect of keeping the protected area extra secure, it is an intolerable frustration to legitimate users who are refused access because the scanner does not recognize them.

False Acceptance or False Acceptance Rate (FAR) ?? This is an erroneous recognition, either by confusing one user with another or by accepting an imposter as a legitimate user.

Physiological Examples:

Unique Physical Attributes:

Fingerprint (Most commonly accepted) Hand Geometry

Retina Scan (Most accurate but most intrusive) Iris Scan

Vascular Scan Behavioral Examples:

Repeated Actions Keystroke Dynamics

(Dwell time (the time a key is pressed) and Flight time (the time between "key up" and the next "key down").

Signature Dynamics

(Stroke and pressure points)

EXAM TIP:

Retina scan devices are the most accurate but also the most invasive biometrics system available today. The continuity of the retinal pattern throughout life and the difficulty in fooling such a device also make it a great long-term, high-security option. Unfortunately, the cost of the proprietary hardware as well the stigma of users thinking it is potentially harmful to the eye makes retinal scanning a bad fit for most situations.

Remember for the exam that fingerprints are the most commonly accepted type of biometrics system.

The other answers are incorrect:

'Users can be authenticated based on behavior.' is incorrect as this choice is TRUE as it pertains to BIOMETRICS.

Biometrics systems makes use of unique physical characteristics or behavior of users.

'User can be authenticated based on unique physical attributes.' is also incorrect as this choice is also TRUE as it pertains to BIOMETRICS. Biometrics systems makes use of unique physical characteristics or behavior of users.

'A biometric system's accuracy is determined by its crossover error rate (CER)' is also incorrect as this is TRUE as it also pertains to BIOMETRICS. The CER is the point at which the false rejection rates and the false acceptance rates are equal. The smaller the value of the CER, the more accurate the system.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 25353-25356). Auerbach Publications. Kindle Edition.

and

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 25297-25303). Auerbach Publications. Kindle Edition.

#### NEW QUESTION 42

- (Topic 1)

What is the PRIMARY use of a password?

- A. Allow access to files.
- B. Identify the user.
- C. Authenticate the user.
- D. Segregate various user's accesses.

**Answer: C**

**Explanation:**

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

#### NEW QUESTION 43

- (Topic 1)

What is the main objective of proper separation of duties?

- A. To prevent employees from disclosing sensitive information.
- B. To ensure access controls are in place.
- C. To ensure that no single individual can compromise a system.
- D. To ensure that audit trails are not tampered with.

**Answer: C**

**Explanation:**

The primary objective of proper separation of duties is to ensure that one person acting alone cannot compromise the company's security in any way. A proper separation of duties does not prevent employees from disclosing information, nor does it ensure that access controls are in place or that audit trails are not tampered with. Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 12: Operations Security (Page 808).

#### NEW QUESTION 48

- (Topic 1)

Which of the following would constitute the best example of a password to use for access to a system by a network administrator?

- A. holiday
- B. Christmas12
- C. Jenny
- D. GyN19Za!

**Answer: D**

**Explanation:**

GyN19Za! would be the the best answer because it contains a mixture of upper and lower case characters, alphabetic and numeric characters, and a special character making it less vulnerable to password attacks.

All of the other answers are incorrect because they are vulnerable to brute force or dictionary attacks. Passwords should not be common words or names. The addition of a number to the end of a common word only marginally strengthens it because a common password attack would also check combinations of words: Christmas23 Christmas123 etc...

#### NEW QUESTION 52

- (Topic 1)

Which of the following control pairings include: organizational policies and procedures, pre- employment background checks, strict hiring practices, employment agreements, employee termination procedures, vacation scheduling, labeling of sensitive materials, increased supervision, security awareness training, behavior awareness, and sign-up procedures to obtain access to information systems and networks?

- A. Preventive/Administrative Pairing
- B. Preventive/Technical Pairing
- C. Preventive/Physical Pairing
- D. Detective/Administrative Pairing

**Answer:** A

**Explanation:**

The Answer: Preventive/Administrative Pairing: These mechanisms include organizational policies and procedures, pre-employment background checks, strict hiring practices, employment agreements, friendly and unfriendly employee termination procedures, vacation scheduling, labeling of sensitive materials, increased supervision, security awareness training, behavior awareness, and sign-up procedures to obtain access to information systems and networks.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

**NEW QUESTION 57**

- (Topic 1)

Which of the following statements relating to the Bell-LaPadula security model is FALSE (assuming the Strong Star property is not being used) ?

- A. A subject is not allowed to read up.
- B. The property restriction can be escaped by temporarily downgrading a high level subject.
- C. A subject is not allowed to read down.
- D. It is restricted to confidentiality.

**Answer:** C

**Explanation:**

It is not a property of Bell LaPadula model. The other answers are incorrect because:

A subject is not allowed to read up is a property of the 'simple security rule' of Bell LaPadula model.

The property restriction can be escaped by temporarily downgrading a high level subject can be escaped by temporarily downgrading a high level subject or by identifying a set of trusted objects which are permitted to violate the property as long as it is not in the middle of an operation.

It is restricted to confidentiality as it is a state machine model that enforces the confidentiality aspects of access control.

Reference: Shon Harris AIO v3 , Chapter-5 : Security Models and Architecture , Page:279-282

**NEW QUESTION 58**

- (Topic 1)

Guards are appropriate whenever the function required by the security program involves which of the following?

- A. The use of discriminating judgment
- B. The use of physical force
- C. The operation of access control devices
- D. The need to detect unauthorized access

**Answer:** A

**Explanation:**

The Answer The use of discriminating judgment, a guard can make the determinations that hardware or other automated security devices cannot make due to its ability to adjust to rapidly changing conditions, to learn and alter recognizable patterns, and to respond to various conditions in the environment. Guards are better at making value decisions at times of incidents. They are appropriate whenever immediate, discriminating judgment is required by the security entity.

The following answers are incorrect:

The use of physical force This is not the best answer. A guard provides discriminating judgment, and the ability to discern the need for physical force.

The operation of access control devices A guard is often uninvolved in the operations of an automated access control device such as a biometric reader, a smart lock, mantrap, etc. The need to detect unauthorized access The primary function of a guard is not to detect unauthorized access, but to prevent unauthorized physical access attempts and may deter social engineering attempts.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 10: Physical security (page 339).

Source: ISC2 Official Guide to the CBK page 288-289.

**NEW QUESTION 61**

- (Topic 1)

Which of the following was developed by the National Computer Security Center (NCSC) for the US Department of Defense ?

- A. TCSEC
- B. ITSEC
- C. DIACAP
- D. NIACAP

**Answer:** A

**Explanation:**

The Answer TCSEC; The TCSEC, frequently referred to as the Orange Book, is the centerpiece of the DoD Rainbow Series publications.

Initially issued by the National Computer Security Center (NCSC) an arm of the National Security Agency in 1983 and then updated in 1985, TCSEC was replaced with the development of the Common Criteria international standard originally published in 2005.

References:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, pages 197-199.

Wikipedia <http://en.wikipedia.org/wiki/TCSEC>

**NEW QUESTION 65**

- (Topic 1)

Which of the following statements pertaining to biometrics is false?

- A. Increased system sensitivity can cause a higher false rejection rate
- B. The crossover error rate is the point at which false rejection rate equals the false acceptance rate.
- C. False acceptance rate is also known as Type II error.

D. Biometrics are based on the Type 2 authentication mechanism.

**Answer:** D

**Explanation:**

Authentication is based on three factor types: type 1 is something you know, type 2 is something you have and type 3 is something you are. Biometrics are based on the Type 3 authentication mechanism.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 37).

**NEW QUESTION 68**

- (Topic 1)

For maximum security design, what type of fence is most effective and cost-effective method (Foot are being used as measurement unit below)?

- A. 3' to 4' high
- B. 6' to 7' high
- C. 8' high and above with strands of barbed wire
- D. Double fencing

**Answer:** D

**Explanation:**

The most commonly used fence is the chain linked fence and it is the most affordable. The standard is a six-foot high fence with two-inch mesh square openings. The material should consist of nine-gauge vinyl or galvanized metal. Nine-gauge is a typical fence material installed in residential areas.

Additionally, it is recommended to place barbed wire strands angled out from the top of the fence at a 45° angle and away from the protected area with three strands running across the top. This will provide for a seven-foot fence. There are several variations of the use of top guards using V-shaped barbed wire or the use of concertina wire as an enhancement, which has been a replacement for more traditional three strand barbed wire top guards.

The fence should be fastened to ridged metal posts set in concrete every six feet with additional bracing at the corners and gate openings. The bottom of the fence should be stabilized against intruders crawling under by attaching posts along the bottom to keep the fence from being pushed or pulled up from the bottom. If the soil is sandy, the bottom edge of the fence should be installed below ground level.

For maximum security design, the use of double fencing with rolls of concertina wire positioned between the two fences is the most effective deterrent and cost-efficient method. In this design, an intruder is required to use an extensive array of ladders and equipment to breach the fences.

Most fencing is largely a psychological deterrent and a boundary marker rather than a barrier, because in most cases such fences can be rather easily penetrated unless added security measures are taken to enhance the security of the fence. Sensors attached to the fence to provide electronic monitoring of cutting or scaling the fence can be used.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 24416-24431). Auerbach Publications. Kindle Edition.

**NEW QUESTION 72**

- (Topic 1)

In regards to information classification what is the main responsibility of information (data) owner?

- A. determining the data sensitivity or classification level
- B. running regular data backups
- C. audit the data users
- D. periodically check the validity and accuracy of the data

**Answer:** A

**Explanation:**

Making the determination to decide what level of classification the information requires is the main responsibility of the data owner.

The data owner within classification is a person from Management who has been entrusted with a data set that belong to the company. It could be for example the Chief Financial Officer (CFO) who has been entrusted with all financial data or it could be the Human Resource Director who has been entrusted with all Human Resource data. The information owner will decide what classification will be applied to the data based on Confidentiality, Integrity, Availability, Criticality, and Sensitivity of the data.

The Custodian is the technical person who will implement the proper classification on objects in accordance with the Data Owner. The custodian DOES NOT decide what classification to apply, it is the Data Owner who will dictate to the Custodian what is the classification to apply.

NOTE:

The term Data Owner is also used within Discretionary Access Control (DAC). Within DAC it means the person who has created an object. For example, if I create a file on my system then I am the owner of the file and I can decide who else could get access to the file. It is left to my discretion. Within DAC access is granted based solely on the Identity of the subject, this is why sometimes DAC is referred to as Identity Based Access Control.

The other choices were not the best answer

Running regular backups is the responsibility of custodian. Audit the data users is the responsibility of the auditors

Periodically check the validity and accuracy of the data is not one of the data owner responsibility

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Page 14, Chapter 1: Security Management Practices.

**NEW QUESTION 75**

- (Topic 1)

In the context of Biometric authentication, what is a quick way to compare the accuracy of devices. In general, the device that have the lowest value would be the most accurate. Which of the following would be used to compare accuracy of devices?

- A. the CER is used.
- B. the FRR is used
- C. the FAR is used
- D. the FER is used

**Answer:** A

**Explanation:**

equal error rate or crossover error rate (EER or CER): the rate at which both accept and reject errors are equal. The value of the EER can be easily obtained from the ROC curve. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

In the context of Biometric Authentication almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in an airport metal detector, the system becomes increasingly selective and has a higher False Reject Rate (FRR). Conversely, if the sensitivity is decreased, the False Acceptance Rate (FAR) will increase. Thus, to have a valid measure of the system performance, the CrossOver Error Rate (CER) is used.

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. In case of similarity scale, if the person is imposter in real, but the matching score is higher than the threshold, then he is treated as genuine that increase the FAR and hence performance also depends upon the selection of threshold value.

false reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected.

failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

failure to capture rate (FTC): Within automatic systems, the probability that the system fails to detect a biometric input when presented correctly.

template capacity: the maximum number of sets of data which can be stored in the system. Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten

Domains of Computer Security, 2001, John Wiley & Sons, Page 37. and

Wikipedia at: <https://en.wikipedia.org/wiki/Biometrics>

**NEW QUESTION 76**

- (Topic 1)

What can be defined as a list of subjects along with their access rights that are authorized to access a specific object?

- A. A capability table
- B. An access control list
- C. An access control matrix
- D. A role-based matrix

**Answer: B**

**Explanation:**

"It [ACL] specifies a list of users [subjects] who are allowed access to each object" CBK, p. 188

A capability table is incorrect. "Capability tables are used to track, manage and apply controls based on the object and rights, or capabilities of a subject. For example, a table identifies the object, specifies access rights allowed for a subject, and permits access based on the user's possession of a capability (or ticket) for the object." CBK, pp. 191-192. The distinction that makes this an incorrect choice is that access is based on possession of a capability by the subject.

To put it another way, as noted in AIO3 on p. 169, "A capability table is different from an ACL because the subject is bound to the capability table, whereas the object is bound to the ACL."

An access control matrix is incorrect. The access control matrix is a way of describing the rules for an access control strategy. The matrix lists the users, groups and roles down the left side and the resources and functions across the top. The cells of the matrix can either indicate that access is allowed or indicate the type of access. CBK pp 317 - 318.

AIO3, p. 169 describes it as a table of subjects and objects specifying the access rights a certain subject possesses pertaining to specific objects.

In either case, the matrix is a way of analyzing the access control needed by a population of subjects to a population of objects. This access control can be applied using rules, ACL's, capability tables, etc.

A role-based matrix is incorrect. Again, a matrix of roles vs objects could be used as a tool for thinking about the access control to be applied to a set of objects.

The results of the analysis could then be implemented using RBAC.

References:

CBK, Domain 2: Access Control. AIO3, Chapter 4: Access Control

**NEW QUESTION 79**

- (Topic 1)

Identification and authentication are the keystones of most access control systems. Identification establishes:

- A. User accountability for the actions on the system.
- B. Top management accountability for the actions on the system.
- C. EDP department accountability for the actions of users on the system.
- D. Authentication for actions on the system

**Answer: A**

**Explanation:**

Identification and authentication are the keystones of most access control systems. Identification establishes user accountability for the actions on the system.

The control environment can be established to log activity regarding the identification, authentication, authorization, and use of privileges on a system. This can be used to detect the occurrence of errors, the attempts to perform an unauthorized action, or to validate when provided credentials were exercised. The logging system as a detective device provides evidence of actions (both successful and unsuccessful) and tasks that were executed by authorized users.

Once a person has been identified through the user ID or a similar value, she must be authenticated, which means she must prove she is who she says she is.

Three general factors can be used for authentication: something a person knows, something a person has, and something a person is. They are also commonly called authentication by knowledge, authentication by ownership, and authentication by characteristic.

For a user to be able to access a resource, he first must prove he is who he claims to be, has the necessary credentials, and has been given the necessary rights or privileges to perform the actions he is requesting. Once these steps are completed successfully, the user can access and use network resources; however, it is necessary to track the user's activities and enforce accountability for his actions.

Identification describes a method of ensuring that a subject (user, program, or process) is the entity it claims to be. Identification can be provided with the use of a username or account number. To be properly authenticated, the subject is usually required to provide a second piece to the credential set. This piece could be a password, passphrase,

cryptographic key, personal identification number (PIN), anatomical attribute, or token.

These two credential items are compared to information that has been previously stored for this subject. If these credentials match the stored information, the subject is authenticated. But we are not done yet. Once the subject provides its credentials and is properly identified, the system it is trying to access needs to determine if this subject has been given the necessary rights and privileges to carry out the requested actions. The system will look at some type of access control

matrix or compare security labels to verify that this subject may indeed access the requested resource and perform the actions it is attempting. If the system determines that the subject may access the resource, it authorizes the subject.

Although identification, authentication, authorization, and accountability have close and complementary definitions, each has distinct functions that fulfill a specific requirement in the process of access control. A user may be properly identified and authenticated to the network, but he may not have the authorization to access the files on the file server. On the other hand, a user may be authorized to access the files on the file server, but until she is properly identified and authenticated, those resources are out of reach.

Reference(s) used for this question:

Schneiter, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition: Access Control ((ISC)2 Press) (Kindle Locations 889-892). Auerbach Publications. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3875-3878). McGraw-Hill. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3833-3848). McGraw-Hill. Kindle Edition.

and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

#### NEW QUESTION 82

- (Topic 1)

Which of the following is not a security goal for remote access?

- A. Reliable authentication of users and systems
- B. Protection of confidential data
- C. Easy to manage access control to systems and network resources
- D. Automated login for remote users

**Answer: D**

#### Explanation:

An automated login function for remote users would imply a weak authentication, thus certainly not a security goal.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition, volume 2, 2001, CRC Press, Chapter 5: An Introduction to Secure Remote Access (page 100).

#### NEW QUESTION 84

- (Topic 1)

What is called the use of technologies such as fingerprint, retina, and iris scans to authenticate the individuals requesting access to resources?

- A. Micrometrics
- B. Macrometrics
- C. Biometrics
- D. MicroBiometrics

**Answer: C**

#### Explanation:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 35.

#### NEW QUESTION 88

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on physical attributes of a person. This raised the necessity of answering 2 questions :

- A. what was the sex of a person and his age
- B. what part of body to be used and how to accomplish identification that is viable
- C. what was the age of a person and his income level
- D. what was the tone of the voice of a person and his habits

**Answer: B**

#### Explanation:

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already taking place. Unique physical attributes or behavior of a person are used for that purpose.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

#### NEW QUESTION 90

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on :

- A. sex of a person
- B. physical attributes of a person
- C. age of a person
- D. voice of a person

**Answer: B**

#### Explanation:

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already under way.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

#### NEW QUESTION 94

- (Topic 1)

The Orange Book is founded upon which security policy model?

- A. The Biba Model
- B. The Bell LaPadula Model
- C. Clark-Wilson Model
- D. TEMPEST

**Answer: B**

#### Explanation:

From the glossary of Computer Security Basics:

The Bell-LaPadula model is the security policy model on which the Orange Book requirements are based. From the Orange Book definition, "A formal state transition model of computer security policy that describes a set of access control rules. In this formal model, the entities in a computer system are divided into abstract sets of subjects and objects. The notion of secure state is defined and it is proven that each state transition preserves security by moving from secure state to secure state; thus, inductively proving the system is secure. A system state is defined to be 'secure' if the only permitted access modes of subjects to objects are in accordance with a specific security policy. In order to determine whether or not a specific access mode is allowed, the clearance of a subject is compared to the classification of the object and a determination is made as to whether the subject is authorized for the specific access mode."

The Biba Model is an integrity model of computer security policy that describes a set of rules. In this model, a subject may not depend on any object or other subject that is less trusted than itself.

The Clark Wilson Model is an integrity model for computer security policy designed for a commercial environment. It addresses such concepts as nondiscretionary access control, privilege separation, and least privilege. TEMPEST is a government program that prevents the compromising electrical and electromagnetic signals that emanate from computers and related equipment from being intercepted and deciphered.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, 1991.

Also: U.S. Department of Defense, Trusted Computer System Evaluation Criteria (Orange Book), DOD 5200.28-STD. December 1985 (also available here).

#### NEW QUESTION 98

- (Topic 1)

Which of the following floors would be most appropriate to locate information processing facilities in a 6-stories building?

- A. Basement
- B. Ground floor
- C. Third floor
- D. Sixth floor

**Answer: C**

#### Explanation:

Your data center should be located in the middle of the facility or the core of a building to provide protection from natural disasters or bombs and provide easier access to emergency crewmembers if necessary. By being at the core of the facility the external wall would act as a secondary layer of protection as well. Information processing facilities should not be located on the top floors of buildings in case of a fire or flooding coming from the roof. Many crimes and theft have also been conducted by simply cutting a large hole on the roof.

They should not be in the basement because of flooding where water has a natural tendency to flow down :-). Even a little amount of water would affect your operation

considering the quantity of electrical cabling sitting directly on the cement floor under your raised floor.

The data center should not be located on the first floor due to the presence of the main entrance where people are coming in and out. You have a lot of high traffic areas such as the elevators, the loading docks, cafeteria, coffee shop, etc.. Really a bad location for a data center.

So it was easy to come up with the answer by using the process of elimination where the top, the bottom, and the basement are all bad choices. That left you with only one possible answer which is the third floor.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 5th Edition, Page 425.

#### NEW QUESTION 101

- (Topic 1)

A central authority determines what subjects can have access to certain objects based on the organizational security policy is called:

- A. Mandatory Access Control
- B. Discretionary Access Control
- C. Non-Discretionary Access Control
- D. Rule-based Access control

**Answer: C**

#### Explanation:

A central authority determines what subjects can have access to certain objects based on the organizational security policy.

The key focal point of this question is the 'central authority' that determines access rights. Cecilia one of the quiz users has sent me feedback informing me that NIST defines MAC as:

"MAC Policy means that Access Control Policy Decisions are made by a CENTRAL AUTHORITY. Which seems to indicate there could be two good answers to this question.

However if you read the NISTR document mentioned in the references below, it is also mentioned that: MAC is the most mentioned NDAC policy. So MAC is a form of NDAC policy.

Within the same document it is also mentioned: "In general, all access control policies other than DAC are grouped in the category of non-discretionary access control (NDAC). As the name implies, policies in this category have rules that are not established at the discretion of the user. Non-discretionary policies establish controls that cannot be changed by users, but only through administrative action."

Under NDAC you have two choices:

Rule Based Access control and Role Based Access Control

MAC is implemented using RULES which makes it fall under RBAC which is a form of NDAC. It is a subset of NDAC.

This question is representative of what you can expect on the real exam where you have more than one choice that seems to be right. However, you have to look closely if one of the choices would be a higher level or if one of the choices falls under one of the other choices. In this case NDAC is a better choice because MAC is falling under NDAC through the use of Rule Based Access Control.

The following are incorrect answers: MANDATORY ACCESS CONTROL

In Mandatory Access Control the labels of the object and the clearance of the subject determines access rights, not a central authority. Although a central authority (Better known as the Data Owner) assigns the label to the object, the system does the determination of access rights automatically by comparing the Object label with the Subject clearance. The subject clearance MUST dominate (be equal or higher) than the object being accessed.

The need for a MAC mechanism arises when the security policy of a system dictates that:

1. Protection decisions must not be decided by the object owner.
2. The system must enforce the protection decisions (i.e., the system enforces the security policy over the wishes or intentions of the object owner).

Usually a labeling mechanism and a set of interfaces are used to determine access based on the MAC policy; for example, a user who is running a process at the Secret classification should not be allowed to read a file with a label of Top Secret. This is known as the "simple security rule" or "no read up".

Conversely, a user who is running a process with a label of Secret should not be allowed to write to a file with a label of Confidential. This rule is called the "\*-property" (pronounced

"star property") or "no write down". The \*-property is required to maintain system security in an automated environment.

#### DISCRETIONARY ACCESS CONTROL

In Discretionary Access Control the rights are determined by many different entities, each of the persons who have created files and they are the owner of that file, not one central authority.

DAC leaves a certain amount of access control to the discretion of the object's owner or anyone else who is authorized to control the object's access. For example, it is generally used to limit a user's access to a file; it is the owner of the file who controls other users' accesses to the file. Only those users specified by the owner may have some combination of read, write, execute, and other permissions to the file.

DAC policy tends to be very flexible and is widely used in the commercial and government sectors. However, DAC is known to be inherently weak for two reasons: First, granting read access is transitive; for example, when Ann grants Bob read access to a file, nothing stops Bob from copying the contents of Ann's file to an object that Bob controls. Bob may now grant any other user access to the copy of Ann's file without Ann's knowledge.

Second, DAC policy is vulnerable to Trojan horse attacks. Because programs inherit the identity of the invoking user, Bob may, for example, write a program for Ann that, on the surface, performs some useful function, while at the same time destroys the contents of Ann's files. When investigating the problem, the audit files would indicate that Ann destroyed her own files. Thus, formally, the drawbacks of DAC are as follows:

Discretionary Access Control (DAC) Information can be copied from one object to another; therefore, there is no real assurance on the flow of information in a system.

No restrictions apply to the usage of information when the user has received it.

The privileges for accessing objects are decided by the owner of the object, rather than through a system-wide policy that reflects the organization's security requirements.

ACLs and owner/group/other access control mechanisms are by far the most common mechanism for implementing DAC policies. Other mechanisms, even though not designed with DAC in mind, may have the capabilities to implement a DAC policy.

#### RULE BASED ACCESS CONTROL

In Rule-based Access Control a central authority could in fact determine what subjects can have access when assigning the rules for access. However, the rules actually determine the access and so this is not the most correct answer.

RuBAC (as opposed to RBAC, role-based access control) allow users to access systems and information based on pre determined and configured rules. It is important to note that there is no commonly understood definition or formally defined standard for rule-based access control as there is for DAC, MAC, and RBAC.

"Rule-based access" is a generic term applied to systems that allow some form of organization-defined rules, and therefore rule-based access control encompasses a broad range of systems. RuBAC may in fact be combined with other models, particularly RBAC or DAC. A RuBAC system intercepts every access request and compares the rules with the rights of the user to make an access decision. Most of the rule-based access control relies on a security label system, which dynamically composes a set of rules defined by a security policy. Security labels are attached to all objects, including files, directories, and devices.

Sometime roles to subjects (based on their attributes) are assigned as well. RuBAC meets the business needs as well as the technical needs of controlling service access. It allows business rules to be applied to access control; for example, customers who have overdue balances may be denied service access. As a mechanism for MAC, rules of RuBAC cannot be changed by users. The rules can be established by any attributes of a system related to the users such as domain, host, protocol, network, or IP addresses. For example, suppose that a user wants to access an object in another network on the other side of a router. The router employs RuBAC with the rule composed by the network addresses, domain, and protocol to decide whether or not the user can be granted access. If employees change their roles within the organization, their existing authentication credentials remain in effect and do not need to be re configured. Using rules in conjunction with roles adds greater flexibility because rules can be applied to people as well as to devices. Rule-based access control can be combined with role-based access control, such that the role of a user is one of the attributes in rule setting. Some provisions of access control systems have rule-based policy engines in addition to a role-based policy engine and certain implemented dynamic policies [Des03]. For example, suppose that two of the primary types of software users are product engineers and quality engineers. Both groups usually have access to the same data, but they have different roles to perform in relation to the data and the application's function. In addition, individuals within each group have different job responsibilities that may be identified using several types of attributes such as developing programs and testing areas. Thus, the access decisions can be made in real time by a scripted policy that regulates the access between the groups of product engineers and quality engineers, and each individual within these groups. Rules can either replace or complement role-based access control. However, the creation of rules and security policies is also a complex process, so each organization will need to strike the appropriate balance.

References used for this question: <http://csrc.nist.gov/publications/nistir/7316/NISTIR-7316.pdf> and

AIO v3 p162-167 and OIG (2007) p.186-191

also

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

#### NEW QUESTION 105

- (Topic 1)

In addition to the accuracy of the biometric systems, there are other factors that must also be considered:

- A. These factors include the enrollment time and the throughput rate, but not acceptability.
- B. These factors do not include the enrollment time, the throughput rate, and acceptability.
- C. These factors include the enrollment time, the throughput rate, and acceptability.
- D. These factors include the enrollment time, but not the throughput rate, neither the acceptability.

**Answer: C**

#### Explanation:

In addition to the accuracy of the biometric systems, there are other factors that must also be considered.

These factors include the enrollment time, the throughput rate, and acceptability. Enrollment time is the time it takes to initially "register" with a system by providing samples

of the biometric characteristic to be evaluated. An acceptable enrollment time is around two minutes.

For example, in fingerprint systems, the actual fingerprint is stored and requires approximately 250kb per finger for a high quality image. This level of information is required for one-to-many searches in forensics applications on very large databases.

In finger-scan technology, a full fingerprint is not stored-the features extracted from this fingerprint are stored using a small template that requires approximately 500 to 1000 bytes of storage. The original fingerprint cannot be reconstructed from this template.

Updates of the enrollment information may be required because some biometric characteristics, such as voice and signature, may change with time.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37 &

38.

**NEW QUESTION 110**

- (Topic 1)

In biometrics, "one-to-many" search against database of stored biometric images is done in:

- A. Authentication
- B. Identification
- C. Identities
- D. Identity-based access control

**Answer: B**

**Explanation:**

In biometrics, identification is a "one-to-many" search of an individual's characteristics from a database of stored images.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

**NEW QUESTION 113**

- (Topic 1)

Which of the following biometric parameters are better suited for authentication use over a long period of time?

- A. Iris pattern
- B. Voice pattern
- C. Signature dynamics
- D. Retina pattern

**Answer: A**

**Explanation:**

The iris pattern is considered lifelong. Unique features of the iris are: freckles, rings, rifts, pits, striations, fibers, filaments, furrows, vasculature and coronas. Voice, signature and retina patterns are more likely to change over time, thus are not as suitable for authentication over a long period of time without needing re-enrollment. Source: FERREL, Robert G, Questions and Answers for the CISSP Exam, domain 1 (derived from the Information Security Management Handbook, 4th Ed., by Tipton & Krause).

**NEW QUESTION 118**

- (Topic 1)

What is the name of the first mathematical model of a multi-level security policy used to define the concept of a secure state, the modes of access, and rules for granting access?

- A. Clark and Wilson Model
- B. Harrison-Ruzzo-Ullman Model
- C. Rivest and Shamir Model
- D. Bell-LaPadula Model

**Answer: D**

**Explanation:**

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

**NEW QUESTION 120**

- (Topic 1)

Which of the following remote access authentication systems is the most robust?

- A. TACACS+
- B. RADIUS
- C. PAP
- D. TACACS

**Answer: A**

**Explanation:**

TACACS+ is a proprietary Cisco enhancement to TACACS and is more robust than RADIUS. PAP is not a remote access authentication system but a remote node security protocol.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 122).

**NEW QUESTION 121**

- (Topic 1)

What is called the percentage at which the False Rejection Rate equals the False Acceptance Rate?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error
- C. Crossover Error Rate (CER)
- D. Failure to enroll rate (FTE or FER)

**Answer: C**

**Explanation:**

The percentage at which the False Rejection Rate equals the False Acceptance Rate is called the Crossover Error Rate (CER). Another name for the CER is the Equal Error Rate (EER), any of the two terms could be used.

Equal error rate or crossover error rate (EER or CER)

It is the rate at which both accept and reject errors are equal. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

The other choices were all wrong answers:

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. This is when an impostor would be accepted by the system.

False reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected. This is when a valid company employee would be rejected by the system.

Failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

and <https://en.wikipedia.org/wiki/Biometrics>

**NEW QUESTION 123**

- (Topic 1)

Which of the following would be true about Static password tokens?

- A. The owner identity is authenticated by the token
- B. The owner will never be authenticated by the token.
- C. The owner will authenticate himself to the system.
- D. The token does not authenticates the token owner but the system.

**Answer: A**

**Explanation:**

Password Tokens

Tokens are electronic devices or cards that supply a user's password for them. A token system can be used to supply either a static or a dynamic password. There is a big difference between the static and dynamic systems, a static system will normally log a user in but a dynamic system the user will often have to log themselves in.

Static Password Tokens:

The owner identity is authenticated by the token. This is done by the person who issues the token to the owner (normally the employer). The owner of the token is now authenticated by "something you have". The token authenticates the identity of the owner to the information system. An example of this occurring is when an employee swipes his or her smart card over an electronic lock to gain access to a store room.

Synchronous Dynamic Password Tokens:

This system is a lot more complex than the static token password. The synchronous dynamic password tokens generate new passwords at certain time intervals that are synched with the main system. The password is generated on a small device similar to a pager or a calculator that can often be attached to the user's key ring. Each password is only valid for a certain time period, typing in the wrong password in the wrong time period will invalidate the authentication. The time factor can also be the systems downfall. If a clock on the system or the password token device becomes out of synch, a user can have troubles authenticating themselves to the system.

Asynchronous Dynamic Password Tokens:

The clock synching problem is eliminated with asynchronous dynamic password tokens. This system works on the same principal as the synchronous one but it does not have a time frame. A lot of big companies use this system especially for employee's who may work from home on the companies VPN (Virtual private Network).

Challenge Response Tokens:

This is an interesting system. A user will be sent special "challenge" strings at either random or timed intervals. The user inputs this challenge string into their token device and the device will respond by generating a challenge response. The user then types this response into the system and if it is correct they are authenticated.

Reference(s) used for this question: <http://www.informit.com/guides/content.aspx?g=security&seqNum=146>

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

**NEW QUESTION 125**

- (Topic 1)

Kerberos can prevent which one of the following attacks?

- A. tunneling attack.
- B. playback (replay) attack.
- C. destructive attack.
- D. process attack.

**Answer: B**

**Explanation:**

Each ticket in Kerberos has a timestamp and are subject to time expiration to

help prevent these types of attacks. The following answers are incorrect:

tunneling attack. This is incorrect because a tunneling attack is an attempt to bypass security and access low-level systems. Kerberos cannot totally prevent these types of attacks.

destructive attack. This is incorrect because depending on the type of destructive attack, Kerberos cannot prevent someone from physically destroying a server.

process attack. This is incorrect because with Kerberos cannot prevent an authorized individuals from running processes.

**NEW QUESTION 130**

- (Topic 1)

What does the (star) integrity axiom mean in the Biba model?

- A. No read up

- B. No write down
- C. No read down
- D. No write up

**Answer:** D

**Explanation:**

The (star) integrity axiom of the Biba access control model states that an object at one level of integrity is not permitted to modify an object of a higher level of integrity (no write up).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 205).

**NEW QUESTION 131**

- (Topic 1)

What is called a sequence of characters that is usually longer than the allotted number for a password?

- A. passphrase
- B. cognitive phrase
- C. anticipated phrase
- D. Real phrase

**Answer:** A

**Explanation:**

A passphrase is a sequence of characters that is usually longer than the allotted number for a password.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, page 37.

**NEW QUESTION 132**

- (Topic 1)

Which of the following is not a logical control when implementing logical access security?

- A. access profiles.
- B. userids.
- C. employee badges.
- D. passwords.

**Answer:** C

**Explanation:**

Employee badges are considered Physical so would not be a logical control. The following answers are incorrect:

userids. Is incorrect because userids are a type of logical control.

access profiles. Is incorrect because access profiles are a type of logical control. passwords. Is incorrect because passwords are a type of logical control.

**NEW QUESTION 137**

- (Topic 1)

Which of the following is NOT a compensating measure for access violations?

- A. Backups
- B. Business continuity planning
- C. Insurance
- D. Security awareness

**Answer:** D

**Explanation:**

Security awareness is a preventive measure, not a compensating measure for access violations.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 50).

**NEW QUESTION 138**

- (Topic 1)

What is called an automated means of identifying or authenticating the identity of a living person based on physiological or behavioral characteristics?

- A. Biometrics
- B. Micrometrics
- C. Macrometrics
- D. MicroBiometrics

**Answer:** A

**Explanation:**

The Answer Biometrics; Biometrics are defined as an automated means of identifying or authenticating the identity of a living person based on physiological or behavioral characteristics.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Pages 37,38.

**NEW QUESTION 140**

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

**Answer: D**

**Explanation:**

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

**NEW QUESTION 145**

- (Topic 1)

Which of the following statements pertaining to Kerberos is TRUE?

- A. Kerberos does not address availability
- B. Kerberos does not address integrity
- C. Kerberos does not make use of Symmetric Keys
- D. Kerberos cannot address confidentiality of information

**Answer: A**

**Explanation:**

The question was asking for a TRUE statement and the only correct statement is "Kerberos does not address availability".

Kerberos addresses the confidentiality and integrity of information. It does not directly address availability.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 42).

**NEW QUESTION 146**

- (Topic 1)

Which of the following is NOT part of the Kerberos authentication protocol?

- A. Symmetric key cryptography
- B. Authentication service (AS)
- C. Principals
- D. Public Key

**Answer: D**

**Explanation:**

There is no such component within kerberos environment. Kerberos uses only symmetric encryption and does not make use of any public key component.

The other answers are incorrect because :

Symmetric key cryptography is a part of Kerberos as the KDC holds all the users' and services' secret keys.

Authentication service (AS) : KDC (Key Distribution Center) provides an authentication service

Principals : Key Distribution Center provides services to principals , which can be users , applications or network services.

References: Shon Harris , AIO v3 , Chapter - 4: Access Control , Pages : 152-155.

**NEW QUESTION 149**

- (Topic 1)

The following is NOT a security characteristic we need to consider while choosing a biometric identification systems:

- A. data acquisition process
- B. cost
- C. enrollment process
- D. speed and user interface

**Answer: B**

**Explanation:**

Cost is a factor when considering Biometrics but it is not a security characteristic.

All the other answers are incorrect because they are security characteristics related to Biometrics.

data acquisition process can cause a security concern because if the process is not fast and efficient it can discourage individuals from using the process.

enrollment process can cause a security concern because the enrollment process has to be quick and efficient. This process captures data for authentication.

speed and user interface can cause a security concern because this also impacts the users acceptance rate of biometrics. If they are not comfortable with the interface and speed they might sabotage the devices or otherwise attempt to circumvent them.

References:

OIG Access Control (Biometrics) (pgs 165-167)

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Pages 5-6.

in process of correction

#### NEW QUESTION 154

- (Topic 1)

Which of the following exemplifies proper separation of duties?

- A. Operators are not permitted modify the system time.
- B. Programmers are permitted to use the system console.
- C. Console operators are permitted to mount tapes and disks.
- D. Tape operators are permitted to use the system console.

**Answer:** A

#### Explanation:

This is an example of Separation of Duties because operators are prevented from modifying the system time which could lead to fraud. Tasks of this nature should be performed by they system administrators.

AIO defines Separation of Duties as a security principle that splits up a critical task among two or more individuals to ensure that one person cannot complete a risky task by himself.

The following answers are incorrect:

Programmers are permitted to use the system console. Is incorrect because programmers should not be permitted to use the system console, this task should be performed by operators. Allowing programmers access to the system console could allow fraud to occur so this is not an example of Separation of Duties..

Console operators are permitted to mount tapes and disks. Is incorrect because operators should be able to mount tapes and disks so this is not an example of Separation of Duties.

Tape operators are permitted to use the system console. Is incorrect because operators should be able to use the system console so this is not an example of Separation of Duties.

References:

OIG CBK Access Control (page 98 - 101) AIOv3 Access Control (page 182)

#### NEW QUESTION 156

- (Topic 1)

Kerberos is vulnerable to replay in which of the following circumstances?

- A. When a private key is compromised within an allotted time window.
- B. When a public key is compromised within an allotted time window.
- C. When a ticket is compromised within an allotted time window.
- D. When the KSD is compromised within an allotted time window.

**Answer:** C

#### Explanation:

Replay can be accomplished on Kerberos if the compromised tickets are used within an allotted time window.

The security depends on careful implementation:enforcing limited lifetimes for authentication credentials minimizes the threat of of replayed credentials, the KDC must be physically secured, and it should be hardened, not permitting any non-kerberos activities.

Reference:

Official ISC2 Guide to the CISSP, 2007 Edition, page 184 also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 42.

#### NEW QUESTION 157

- (Topic 1)

Sensitivity labels are an example of what application control type?

- A. Preventive security controls
- B. Detective security controls
- C. Compensating administrative controls
- D. Preventive accuracy controls

**Answer:** A

#### Explanation:

Sensitivity labels are a preventive security application controls, such as are firewalls, reference monitors, traffic padding, encryption, data classification, one-time passwords, contingency planning, separation of development, application and test environments.

The incorrect answers are:

Detective security controls - Intrusion detection systems (IDS), monitoring activities, and audit trails.

Compensating administrative controls - There no such application control. Preventive accuracy controls - data checks, forms, custom screens, validity checks, contingency planning, and backups. Sources:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 7: Applications and Systems Development (page 264).

KRUTZ, Ronald & VINES, Russel, The CISSP Prep Guide: Gold Edition, Wiley Publishing Inc., 2003, Chapter 7: Application Controls, Figure 7.1 (page 360).

#### NEW QUESTION 161

- (Topic 1)

Which of the following is not a preventive login control?

- A. Last login message
- B. Password aging
- C. Minimum password length
- D. Account expiration

**Answer:** A

**Explanation:**

The last login message displays the last login date and time, allowing a user to discover if their account was used by someone else. Hence, this is rather a detective control.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, July 1992 (page 63).

**NEW QUESTION 164**

- (Topic 1)

In non-discretionary access control using Role Based Access Control (RBAC), a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on:

- A. The societies role in the organization
- B. The individual's role in the organization
- C. The group-dynamics as they relate to the individual's role in the organization
- D. The group-dynamics as they relate to the master-slave role in the organization

**Answer: B**

**Explanation:**

In Non-Discretionary Access Control, when Role Based Access Control is being used, a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on the individual's role in the organization.

Reference(S) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

**NEW QUESTION 165**

- (Topic 1)

The throughput rate is the rate at which individuals, once enrolled, can be processed and identified or authenticated by a biometric system. Acceptable throughput rates are in the range of:

- A. 100 subjects per minute.
- B. 25 subjects per minute.
- C. 10 subjects per minute.
- D. 50 subjects per minute.

**Answer: C**

**Explanation:**

The throughput rate is the rate at which individuals, once enrolled, can be processed and identified or authenticated by a biometric system. Acceptable throughput rates are in the range of 10 subjects per minute.

Things that may impact the throughput rate for some types of biometric systems may include:

A concern with retina scanning systems may be the exchange of body fluids on the eyepiece.

Another concern would be the retinal pattern that could reveal changes in a person's health, such as diabetes or high blood pressure.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

**NEW QUESTION 169**

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

**Answer: D**

**Explanation:**

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

**NEW QUESTION 174**

- (Topic 1)

What Orange Book security rating is reserved for systems that have been evaluated but fail to meet the criteria and requirements of the higher divisions?

- A. A
- B. D
- C. E
- D. F

**Answer: B**

**Explanation:**

D or "minimal protection" is reserved for systems that were evaluated under the TCSEC but did not meet the requirements for a higher trust level.

A is incorrect. A or "Verified Protection" is the highest trust level under the TCSEC. E is incorrect. The trust levels are A - D so "E" is not a valid trust level.

F is incorrect. The trust levels are A - D so "F" is not a valid trust level.

CBK, pp. 329 - 330  
 AIO3, pp. 302 - 306

**NEW QUESTION 176**

- (Topic 1)

Which of the following is NOT true of the Kerberos protocol?

- A. Only a single login is required per session.
- B. The initial authentication steps are done using public key algorithm.
- C. The KDC is aware of all systems in the network and is trusted by all of them
- D. It performs mutual authentication

**Answer: B**

**Explanation:**

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. It has the following characteristics:

It is secure: it never sends a password unless it is encrypted.

Only a single login is required per session. Credentials defined at login are then passed between resources without the need for additional logins.


The concept depends on a trusted third party ?C a Key Distribution Center (KDC). The KDC is aware of all systems in the network and is trusted by all of them.

It performs mutual authentication, where a client proves its identity to a server and a server proves its identity to the client.

Kerberos introduces the concept of a Ticket-Granting Server/Service (TGS). A client that wishes to use a service has to receive a ticket from the TGS ?C a ticket is a time-limited

cryptographic message ?C giving it access to the server. Kerberos also requires an Authentication Server (AS) to verify clients. The two servers combined make up a KDC.

Within the Windows environment, Active Directory performs the functions of the KDC. The following figure shows the sequence of events required for a client to gain access to a service using Kerberos authentication. Each step is shown with the Kerberos message associated with it, as defined in RFC 4120 ??The Kerberos Network Authorization Service (V5)??.

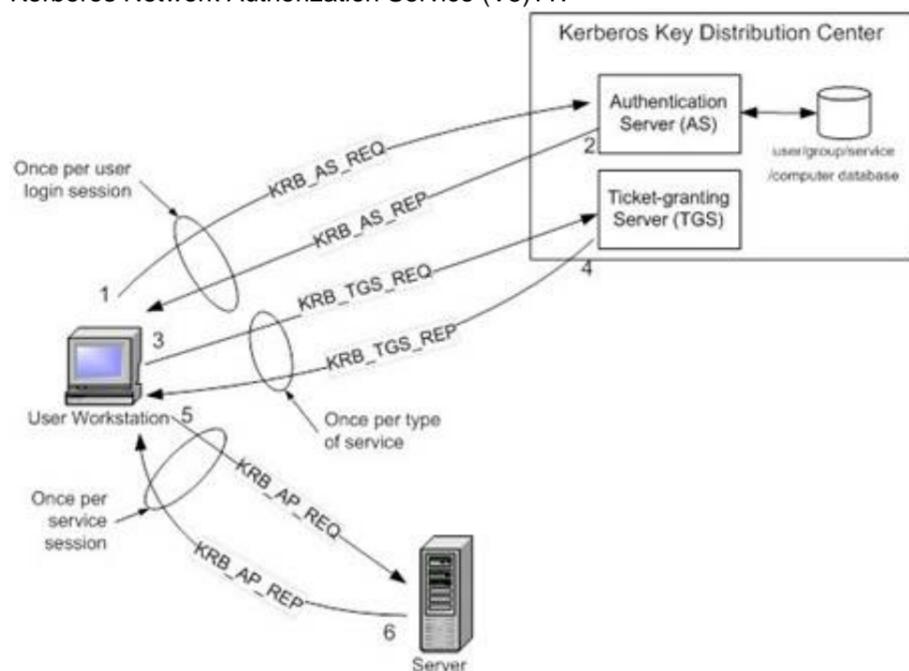

C:\Users\MCS\Desktop\1.jpg Kerberos Authentication Step by Step

Step 1: The user logs on to the workstation and requests service on the host. The workstation sends a message to the Authorization Server requesting a ticket granting ticket (TGT).

Step 2: The Authorization Server verifies the user??s access rights in the user database and creates a TGT and session key. The Authorization Server encrypts the results using a key derived from the user??s password and sends a message back to the user workstation.

The workstation prompts the user for a password and uses the password to decrypt the incoming message. When decryption succeeds, the user will be able to use the TGT to request a service ticket.

Step 3: When the user wants access to a service, the workstation client application sends a request to the Ticket Granting Service containing the client name, realm name and a timestamp. The user proves his identity by sending an authenticator encrypted with the session key received in Step 2.

Step 4: The TGS decrypts the ticket and authenticator, verifies the request, and creates a ticket for the requested server. The ticket contains the client name and optionally the client IP address. It also contains the realm name and ticket lifespan. The TGS returns the ticket to the user workstation. The returned message contains two copies of a server session key

?C one encrypted with the client password, and one encrypted by the service password.

Step 5: The client application now sends a service request to the server containing the ticket received in Step 4 and an authenticator. The service authenticates the request by decrypting the session key. The server verifies that the ticket and authenticator match, and then grants access to the service. This step as described does not include the authorization performed by the Intel AMT device, as described later.

Step 6: If mutual authentication is required, then the server will reply with a server authentication message.

The Kerberos server knows "secrets" (encrypted passwords) for all clients and servers under its control, or it is in contact with other secure servers that have this information. These "secrets" are used to encrypt all of the messages shown in the figure above.

To prevent "replay attacks," Kerberos uses timestamps as part of its protocol definition. For timestamps to work properly, the clocks of the client and the server need to be in synch as much as possible. In other words, both computers need to be set to the same time and date. Since the clocks of two computers are often out of synch, administrators can establish a policy to establish the maximum acceptable difference to Kerberos between a client's clock and server's clock. If the difference between a client's clock and the server's clock is less than the maximum time difference specified in this policy, any timestamp used in a session between the two computers will be considered authentic. The maximum difference is usually set to five minutes.

Note that if a client application wishes to use a service that is "Kerberized" (the service is configured to perform Kerberos authentication), the client must also be Kerberized so that it expects to support the necessary message responses.

For more information about Kerberos, see <http://web.mit.edu/kerberos/www/>.

References:

Introduction to Kerberos Authentication from Intel and

<http://www.zeroshell.net/eng/kerberos/Kerberos-definitions/#1.3.5.3> and

<http://www.ietf.org/rfc/rfc4120.txt>

#### NEW QUESTION 177

- (Topic 1)

What is Kerberos?

- A. A three-headed dog from the Egyptian mythology.
- B. A trusted third-party authentication protocol.
- C. A security model.
- D. A remote authentication dial in user server.

**Answer: B**

#### Explanation:

Is correct because that is exactly what Kerberos is. The following answers are incorrect:

A three-headed dog from Egyptian mythology. Is incorrect because we are dealing with Information Security and not the Egyptian mythology but the Greek Mythology.

A security model. Is incorrect because Kerberos is an authentication protocol and not just a security model.

A remote authentication dial in user server. Is incorrect because Kerberos is not a remote authentication dial in user server that would be called RADIUS.

#### NEW QUESTION 178

- (Topic 1)

Which of the following models does NOT include data integrity or conflict of interest?

- A. Biba
- B. Clark-Wilson
- C. Bell-LaPadula
- D. Brewer-Nash

**Answer: C**

#### Explanation:

Bell LaPadula model (Bell 1975): The granularity of objects and subjects is not predefined, but the model prescribes simple access rights. Based on simple access restrictions the Bell LaPadula model enforces a discretionary access control policy enhanced with mandatory rules. Applications with rigid confidentiality requirements and without strong integrity requirements may properly be modeled.

These simple rights combined with the mandatory rules of the policy considerably restrict the spectrum of applications which can be appropriately modeled.

Source: TIPTON, Hal, (ISC)<sup>2</sup>, Introduction to the CISSP Exam presentation.

Also check:

Proceedings of the IFIP TC11 12th International Conference on Information Security, Samos (Greece), May 1996, On Security Models.

#### NEW QUESTION 183

- (Topic 1)

The number of violations that will be accepted or forgiven before a violation record is produced is called which of the following?

- A. clipping level
- B. acceptance level
- C. forgiveness level
- D. logging level

**Answer: A**

#### Explanation:

The correct answer is "clipping level". This is the point at which a system decides to take some sort of action when an action repeats a preset number of times. That action may be to log the activity, lock a user account, temporarily close a port, etc.

Example: The most classic example of a clipping level is failed login attempts. If you have a system configured to lock a user's account after three failed login attempts, that is the "clipping level".

The other answers are not correct because:

Acceptance level, forgiveness level, and logging level are nonsensical terms that do not exist (to my knowledge) within network security.

Reference:

Official ISC2 Guide - The term "clipping level" is not in the glossary or index of that book. I cannot find it in the text either. However, I'm quite certain that it would be considered part of the CBK, despite its exclusion from the Official Guide.

All in One Third Edition page: 136 - 137

#### NEW QUESTION 186

- (Topic 1)

Controls like guards and general steps to maintain building security, securing of server rooms or laptops, the protection of cables, and usage of magnetic switches on doors and windows are some of the examples of:

- A. Administrative controls
- B. Logical controls
- C. Technical controls
- D. Physical controls

**Answer: D**

#### Explanation:

Controls like guards and general steps to maintain building security, securing of server rooms or laptops, the protection of cables, and usage of magnetic switches on doors and windows are all examples of Physical Security.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

### NEW QUESTION 191

- (Topic 1)

Which of the following is most appropriate to notify an external user that session monitoring is being conducted?

- A. Logon Banners
- B. Wall poster
- C. Employee Handbook
- D. Written agreement

**Answer:** A

#### Explanation:

Banners at the log-on time should be used to notify external users of any monitoring that is being conducted. A good banner will give you a better legal stand and also makes it obvious the user was warned about who should access the system and if it is an unauthorized user then he is fully aware of trespassing.

This is a tricky question, the keyword in the question is External user.

There are two possible answers based on how the question is presented, this question could either apply to internal users or ANY anonymous user.

Internal users should always have a written agreement first, then logon banners serve as a constant reminder.

Anonymous users, such as those logging into a web site, ftp server or even a mail server; their only notification system is the use of a logon banner.

References used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 50.

and

Shon Harris, CISSP All-in-one, 5th edition, pg 873

### NEW QUESTION 194

- (Topic 1)

Which access control model is best suited in an environment where a high security level is required and where it is desired that only the administrator grants access control?

- A. DAC
- B. MAC
- C. Access control matrix
- D. TACACS

**Answer:** B

#### Explanation:

MAC provides high security by regulating access based on the clearance of individual users and sensitivity labels for each object. Clearance levels and sensitivity levels cannot be modified by individual users -- for example, user Joe (SECRET clearance) cannot reclassify the "Presidential Doughnut Recipe" from "SECRET" to "CONFIDENTIAL" so that his friend Jane (CONFIDENTIAL clearance) can read it. The administrator is ultimately responsible for configuring this protection in accordance with security policy and directives from the Data Owner.

DAC is incorrect. In DAC, the data owner is responsible for controlling access to the object. Access control matrix is incorrect. The access control matrix is a way of thinking about the

access control needed by a population of subjects to a population of objects. This access

control can be applied using rules, ACL's, capability tables, etc.

TACACS is incorrect. TACACS is a tool for performing user authentication. References:

CBK, p. 187, Domain 2: Access Control. AIO3, Chapter 4, Access Control.

### NEW QUESTION 199

- (Topic 1)

What is considered the most important type of error to avoid for a biometric access control system?

- A. Type I Error
- B. Type II Error
- C. Combined Error Rate
- D. Crossover Error Rate

**Answer:** B

#### Explanation:

When a biometric system is used for access control, the most important error is the false accept or false acceptance rate, or Type II error, where the system would accept an impostor.

A Type I error is known as the false reject or false rejection rate and is not as important in the security context as a type II error rate. A type one is when a valid company employee is rejected by the system and he cannot get access even thou it is a valid user.

The Crossover Error Rate (CER) is the point at which the false rejection rate equals the false acceptance rate if your would create a graph of Type I and Type II errors. The lower the CER the better the device would be.

The Combined Error Rate is a distracter and does not exist.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition (volume 1), 2000, CRC Press, Chapter 1, Biometric Identification (page 10).

### NEW QUESTION 202

- (Topic 1)

In Synchronous dynamic password tokens:

- A. The token generates a new password value at fixed time intervals (this password could be based on the time of day encrypted with a secret key).
- B. The token generates a new non-unique password value at fixed time intervals (this password could be based on the time of day encrypted with a secret key).
- C. The unique password is not entered into a system or workstation along with an owner's PIN.
- D. The authentication entity in a system or workstation knows an owner's secret key and PIN, and the entity verifies that the entered password is invalid and that it was entered during the invalid time window.

**Answer:** A

**Explanation:**

Synchronous dynamic password tokens:

- The token generates a new password value at fixed time intervals (this password could be the time of day encrypted with a secret key).
- the unique password is entered into a system or workstation along with an owner's PIN.
- The authentication entity in a system or workstation knows an owner's secret key and PIN, and the entity verifies that the entered password is valid and that it was entered during the valid time window.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

**NEW QUESTION 207**

- (Topic 1)

Another type of access control is lattice-based access control. In this type of control a lattice model is applied. How is this type of access control concept applied?

- A. The pair of elements is the subject and object, and the subject has an upper bound equal or higher than the upper bound of the object being accessed.
- B. The pair of elements is the subject and object, and the subject has an upper bound lower than the upper bound of the object being accessed.
- C. The pair of elements is the subject and object, and the subject has no special upper or lower bound needed within the lattice.
- D. The pair of elements is the subject and object, and the subject has no access rights in relation to an object.

**Answer:** A

**Explanation:**

To apply this concept to access control, the pair of elements is the subject and object, and the subject has to have an upper bound equal or higher than the object being accessed.

WIKIPEDIA has a great explanation as well:

In computer security, lattice-based access control (LBAC) is a complex access control based on the interaction between any combination of objects (such as resources, computers, and applications) and subjects (such as individuals, groups or organizations). In this type of label-based mandatory access control model, a lattice is used to define the levels of security that an object may have and that a subject may have access to. The subject is only allowed to access an object if the security level of the subject is greater than or equal to that of the object.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

and

[http://en.wikipedia.org/wiki/Lattice-based\\_access\\_control](http://en.wikipedia.org/wiki/Lattice-based_access_control)

**NEW QUESTION 210**

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### SSCP Practice Exam Features:

- \* SSCP Questions and Answers Updated Frequently
- \* SSCP Practice Questions Verified by Expert Senior Certified Staff
- \* SSCP Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* SSCP Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
[Order The SSCP Practice Test Here](#)