

Cisco

Exam Questions 300-410

Implementing Cisco Enterprise Advanced Routing and Services (ENARSI)



NEW QUESTION 1

Refer to the exhibit.

```

config t
flow record v4_r1
match ipv4 tos
match ipv4 protocol
match ipv4 source address
match ipv4 destination address
match transport source-port
match transport destination-port
collect counter bytes long
collect counter packets long
!
flow exporter EXPORTER-1
destination 172.16.10.2
transport udp 90
exit
!
flow monitor FLOW-MONITOR-1
record v4_r1
exit
!
ip cef
!
interface Ethernet0/0.1
ip address 172.16.6.2 255.255.255.0
ip flow monitor FLOW-MONITOR-1 input
!

```


Why is the remote NetFlow server failing to receive the NetFlow data?

- A. The flow exporter is configured but is not used.
- B. The flow monitor is applied in the wrong direction.
- C. The flow monitor is applied to the wrong interface.
- D. The destination of the flow exporter is not reachable.

Answer: D

NEW QUESTION 2

Refer to the exhibit.

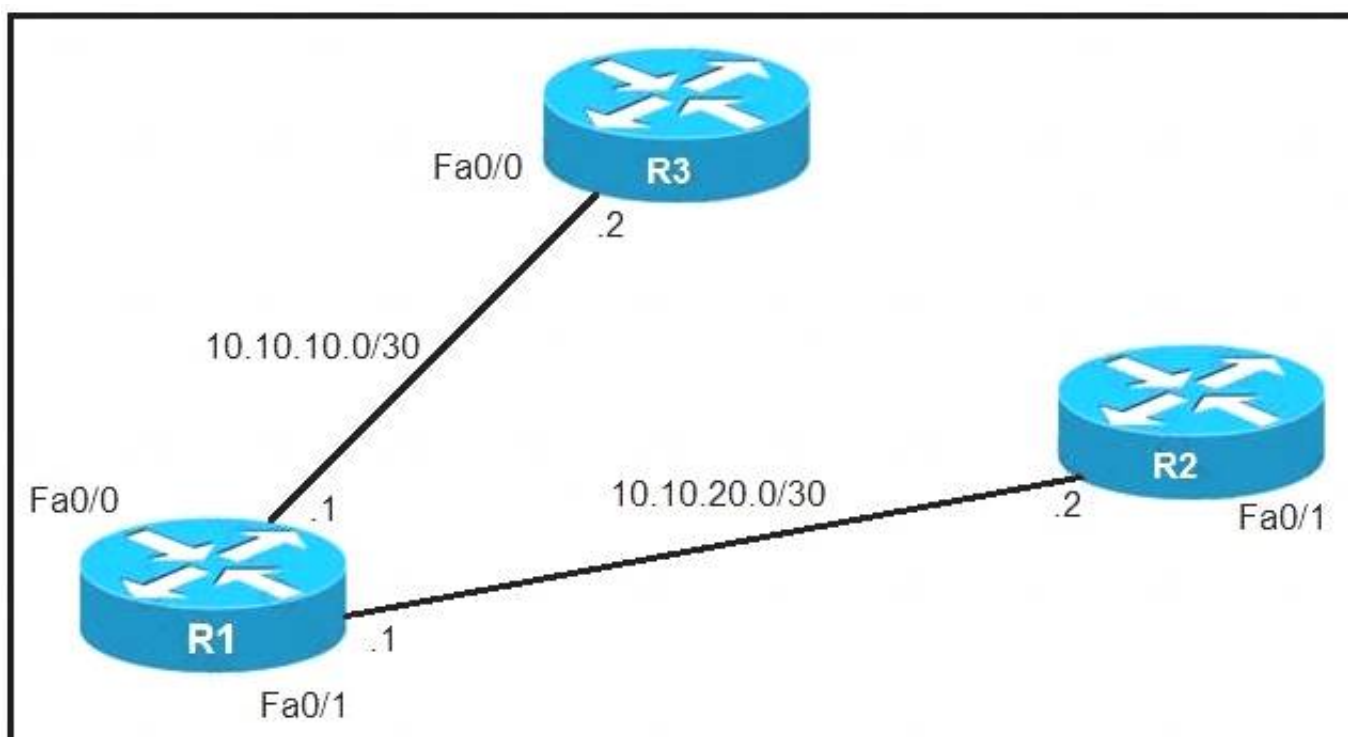


An IP SLA was configured on router R1 that allows the default route to be modified in the event that Fa0/0 loses reachability with the router R3 Fa0/0 interface. The route has changed to flow through router R2. Which debug command is used to troubleshoot this issue?

- A. debug ip flow
- B. debug ip sla error
- C. debug ip routing
- D. debug ip packet

Answer: C

NEW QUESTION 3

Refer to the exhibit.

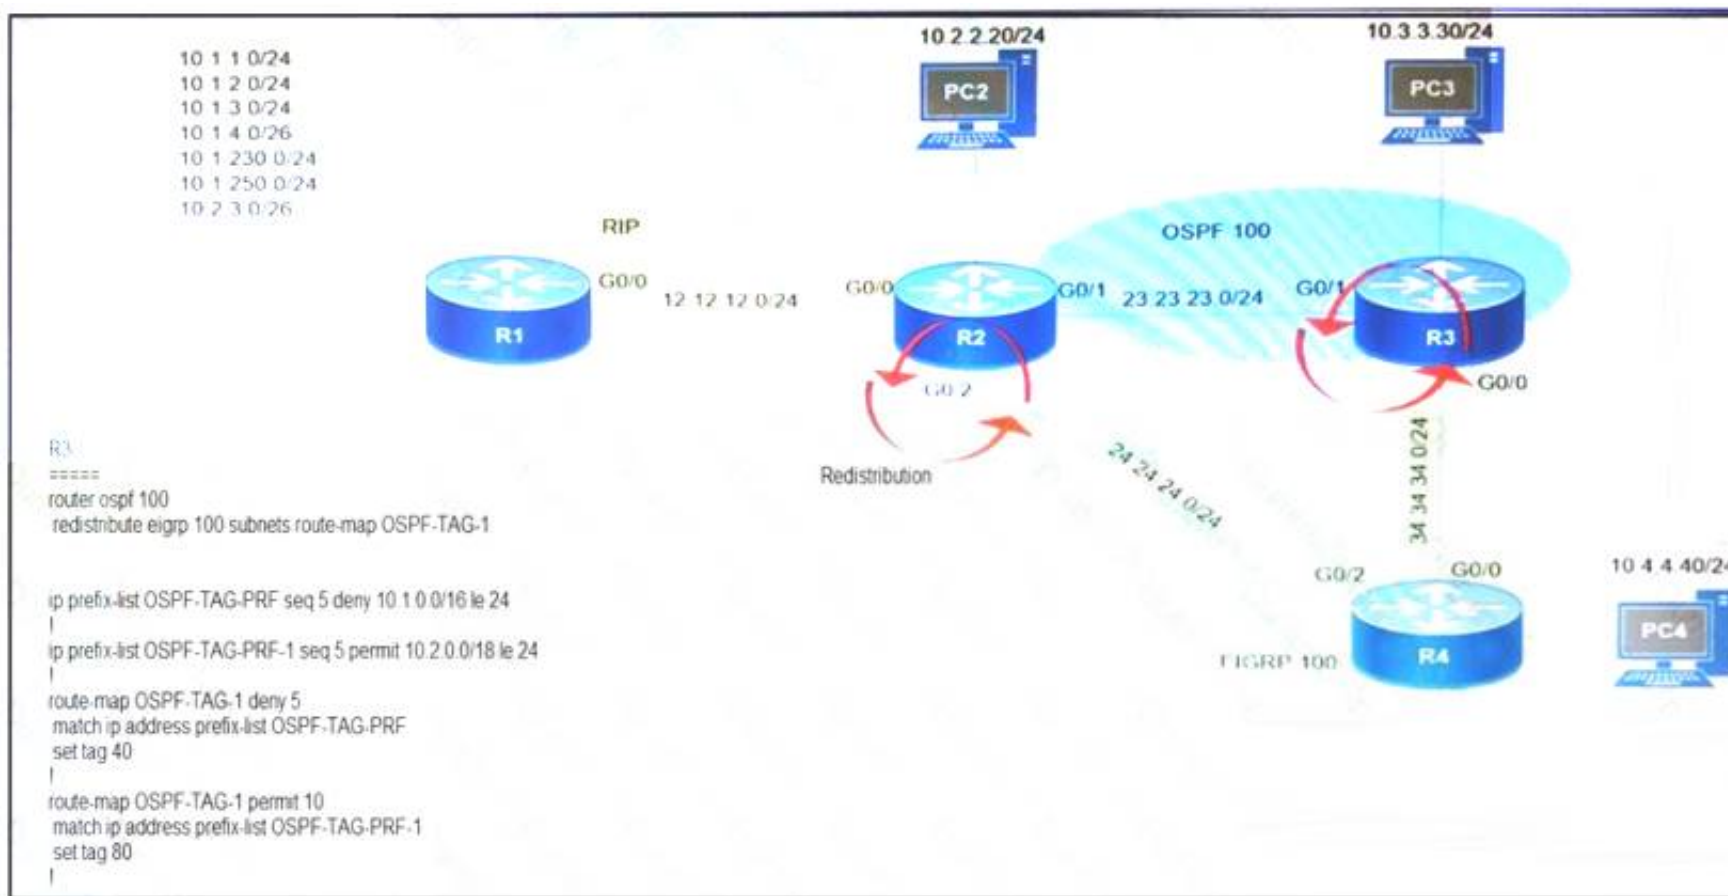

Which subnet is redistributed from EIGRP to OSPF routing protocols?

- A. 10.2.2.0/24
- B. 10.1.4.0/26
- C. 10.1.2.0/24
- D. 10.2.3.0/26

Answer: A

NEW QUESTION 4

Refer to the exhibit.

```

R1(config)#route-map ADD permit 20
R1(config-route-map)#set tag 1

R1(config)#router ospf1
R1(config-router)#redistribute rip subnets route-map ADD
  
```

Which statement about R1 is true?

- A. OSPF redistributes RIP routes only if they have a tag of one.
- B. RIP learned routes are distributed to OSPF with a tag value of one.
- C. R1 adds one to the metric for RIP learned routes before redistributing to OSPF.
- D. RIP routes are redistributed to OSPF without any changes.

Answer: B

NEW QUESTION 5

Drag and drop the DHCP messages from the left onto the correct uses on the right.


DHCPACK	server-to-client communication, refusing the request for configuration parameters
DHCPINFORM	client-to-server communication, indicating that the network address is already in use
DHCPNAK	server-to-client communication with configuration parameters, including committed network address
DHCPDECLINE	client-to-server communication, asking for only local configuration parameters that the client has already externally configured as an address

A. Mastered

B. Not Mastered

Answer: A

Explanation:

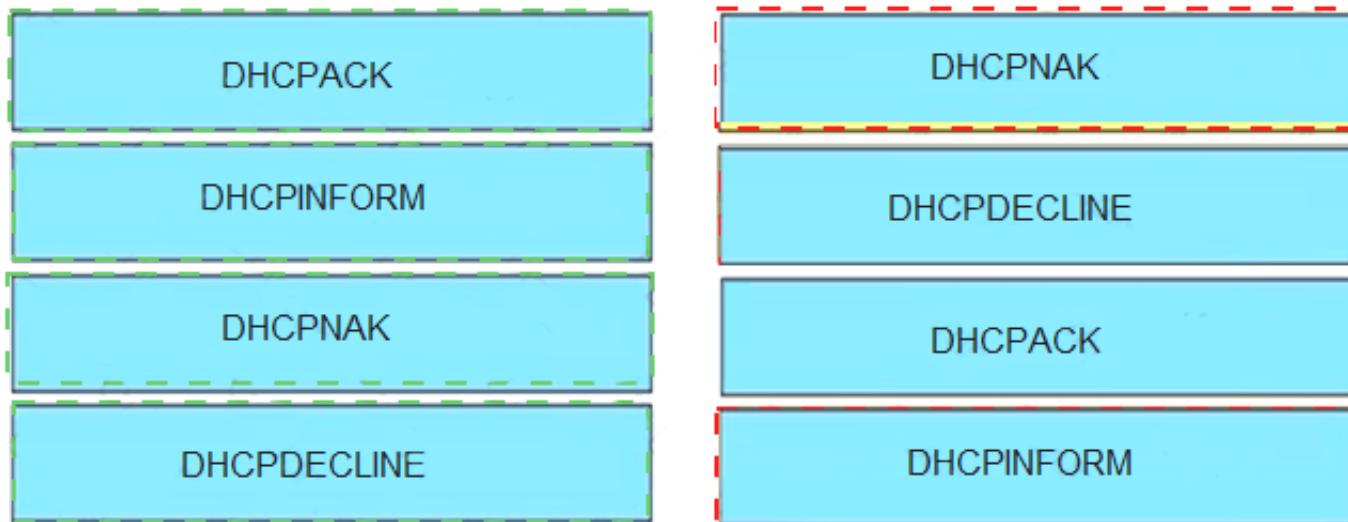

NEW QUESTION 6

Which command displays the IP routing table information that is associated with VRF-Lite?

- A. show ip vrf
- B. show ip route vrf
- C. show run vrf
- D. show ip protocols vrf

Answer: B

NEW QUESTION 7

Refer to the exhibit.

```

service timestamps debug datetime msec
service timestamps log datetime
clock timezone MST -7 0
clock summer-time MST recurring
ntp authentication-key 1 md5 00101A0B0152181206224747071E 7
ntp server 10.10.10.10

R1#show clock
*06:13:44.045 MST Sun Dec 30 2018

R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config) #logging host 10.10.10.20
R1(config) #end
R1#
*Dec 30 13:15:28: %SYS-5-CONFIG_I: Configured from console by console
R1#
*Dec 30 13:15:28: %SYS-6-LOGGINGHOST_STARTSTOP: Logging to host 10.10.10.20 port 514
started - CLI initiated
    
```


An administrator noticed that after a change was made on R1, the timestamps on the system logs did not match the clock. What is the reason for this error?

- A. An authentication error with the NTP server results in an incorrect timestamp.
- B. The keyword localtime is not defined on the timestamp service command.
- C. The NTP server is in a different time zone.
- D. The system clock is set incorrectly to summer-time hours.

Answer: D

NEW QUESTION 8

Refer to the exhibit.

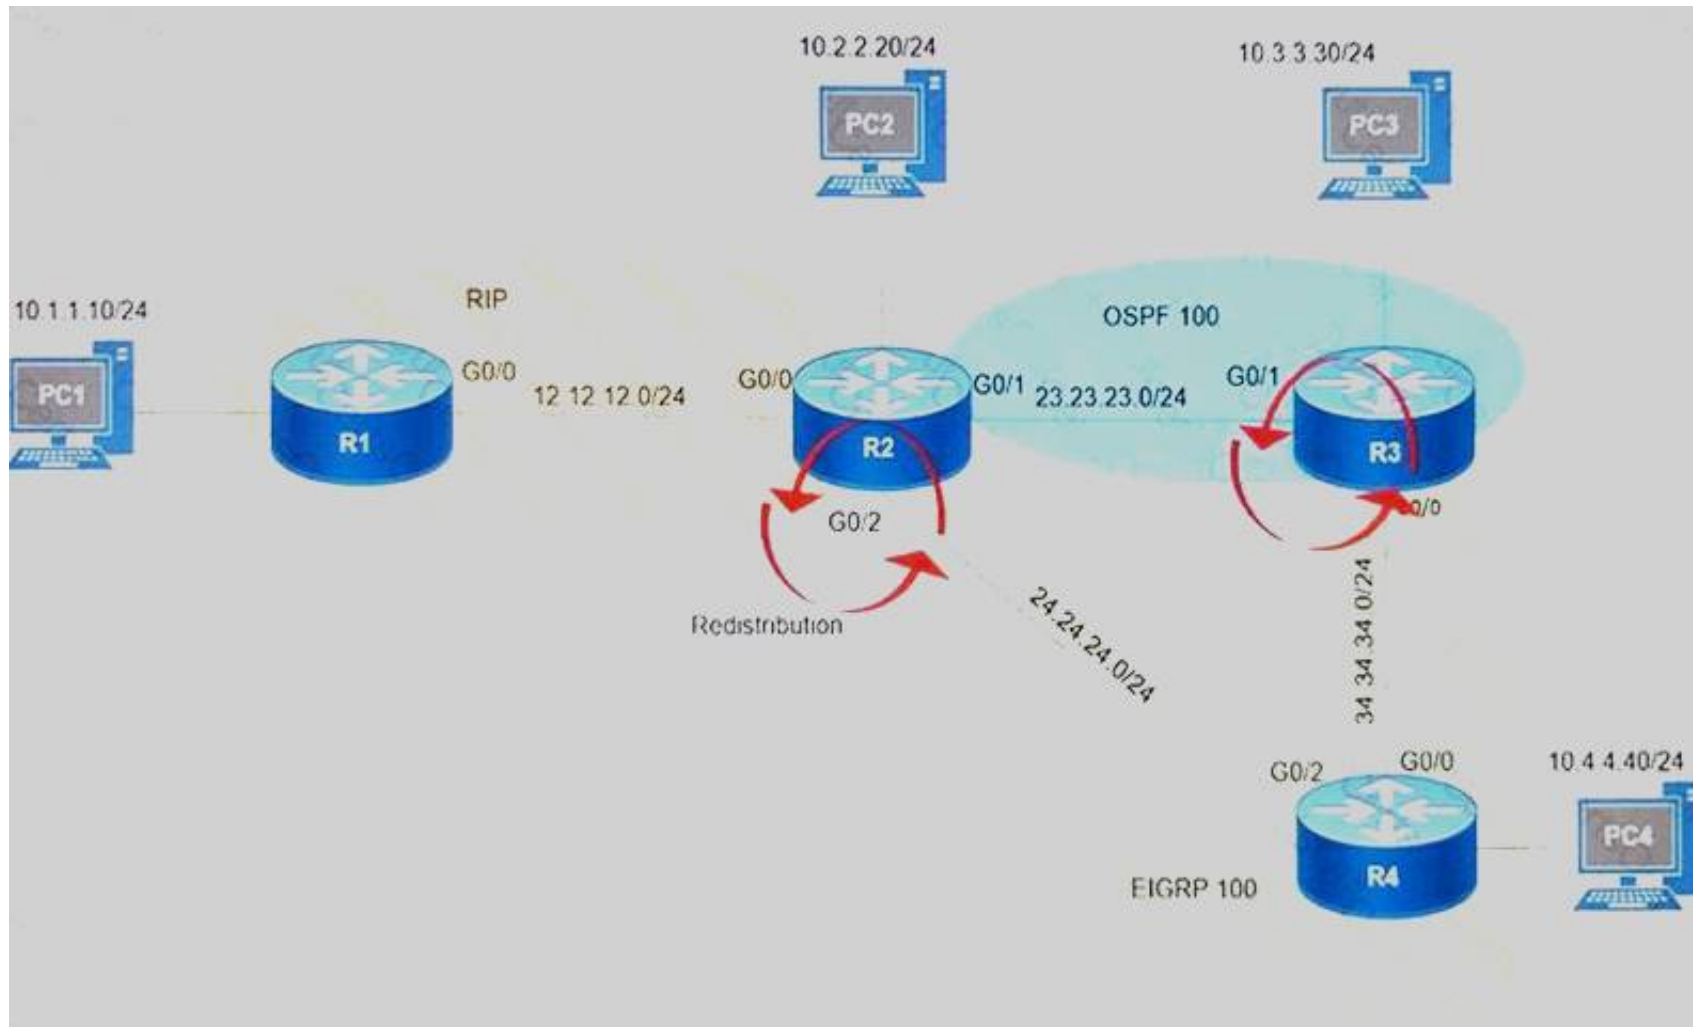

After redistribution is enabled between the routing protocols; PC2, PC3, and PC4 cannot reach PC1. Which action can the engineer take to solve the issue so that all the PCs are reachable?

- A. Set the administrative distance 100 under the RIP process on R2.
- B. Filter the prefix 10.1.1.0/24 when redistributed from OSPF to EIGRP.
- C. Filter the prefix 10.1.1.0/24 when redistributed from RIP to EIGRP.
- D. Redistribute the directly connected interfaces on R2.

Answer: B

NEW QUESTION 9

Refer to the exhibit.

```
access-list 100 deny tcp any any eq 465
access-list 100 deny tcp any eq 465 any
access-list 100 permit tcp any any eq 80
access-list 100 permit tcp any eq 80 any
access-list 100 permit udp any any eq 443
access-list 100 permit udp any eq 443 any
```

During troubleshooting it was discovered that the device is not reachable using a secure web browser. What is needed to fix the problem?

- A. permit tcp port 443
- B. permit udp port 465
- C. permit tcp port 465
- D. permit tcp port 22

Answer: A

NEW QUESTION 10

An engineer configured the wrong default gateway for the Cisco DNA Center enterprise interface during the install. Which command must the engineer run to correct the configuration?

- A. sudo maglev-config update
- B. sudo maglev install config update
- C. sudo maglev reinstall
- D. sudo update config install

Answer: A

NEW QUESTION 10

Drag and drop the addresses from the left onto the correct IPv6 filter purposes on the right.

permit ip 2001:d8b:800:200c::/117 2001:0DBB:800:2010::/64 eq 443	Permit NTP from this source 2001:0D8B:0800:200c::1f
permit ip 2001:D88:800:200C::e/126 2001:0DBB:800:2010::/64 eq 514	Permit syslog from this source 2001:0D88:0800:200c::1c
permit ip 2001:d8b:800:200c::800 /117 2001:0DBB:800:2010::/64 eq 80	Permit HTTP from this source 2001:0D8B:0800:200c::0ff
permit ip 2001:D8B:800:200C::c/126 2001:0DBB:800:2010::/64 eq 123	Permit HTTPS from this source 2001:0D8B:0800:200c::07ff

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

permit ip 2001:d8b:800:200c::/117 2001:0DBB:800:2010::/64 eq 443	permit ip 2001:D8B:800:200C::c/126 2001:0DBB:800:2010::/64 eq 123
permit ip 2001:D88:800:200C::e/126 2001:0DBB:800:2010::/64 eq 514	permit ip 2001:D88:800:200C::e/126 2001:0DBB:800:2010::/64 eq 514
permit ip 2001:d8b:800:200c::800 /117 2001:0DBB:800:2010::/64 eq 80	permit ip 2001:d8b:800:200c::800 /117 2001:0DBB:800:2010::/64 eq 80
permit ip 2001:D8B:800:200C::c/126 2001:0DBB:800:2010::/64 eq 123	permit ip 2001:d8b:800:200c::/117 2001:0DBB:800:2010::/64 eq 443

NEW QUESTION 14

Refer to the exhibit.

```
Router# show tag-switching tdp bindings
(...)
tib entry: 10.10.10.1/32, rev 31
    local binding: tag: 18
    remote binding: tsr: 10.10.10.1:0, tag: imp-null
    remote binding: tsr: 10.10.10.2:0, tag: 18
    remote binding: tsr: 10.10.10.6:0, tag: 21
tib entry: 10.10.10.2/32, rev 22
    local binding: tag: 17
    remote binding: tsr: 10.10.10.2:0, tag: imp-null
    remote binding: tsr: 10.10.10.1:0, tag: 19
    remote binding: tsr: 10.10.10.6:0, tag: 22
```

What does the imp-null tag represent in the MPLS VPN cloud?

- A. Pop the label
- B. Impose the label
- C. Include the EXP bit
- D. Exclude the EXP bit

Answer: C

NEW QUESTION 17

Which method changes the forwarding decision that a router makes without first changing the routing table or influencing the IP data plane?

- A. nonbroadcast multiaccess
- B. packet switching
- C. policy-based routing
- D. forwarding information base

Answer: C

NEW QUESTION 19

Which protocol is used to determine the NBMA address on the other end of a tunnel when mGRE is used?

- A. NHRP
- B. IPsec
- C. MP-BGP
- D. OSPF

Answer: D

NEW QUESTION 20

R2 has a locally originated prefix 192.168.130.0/24 and has these configurations:

```
ip prefix-list test seq 5 permit 192.168.130.0/24
!
route-map OUT permit10
match ip address prefix-list test
set as-path prepend 65000
```

What is the result when the route-map OUT command is applied toward an eBGP neighbor R1 (1.1.1.1) by using the neighbor 1.1.1.1 route-map OUT out command?

- A. R1 sees 192.168.130.0/24 as two AS hops away instead of one AS hop away.
- B. R1 does not accept any routes other than 192.168.130.0/24
- C. R1 does not forward traffic that is destined for 192.168.30.0/24
- D. Network 192.168.130.0/24 is not allowed in the R1 table

Answer: A

NEW QUESTION 22

Which statement about IPv6 RA Guard is true?

- A. It does not offer protection in environments where IPv6 traffic is tunneled.
- B. It cannot be configured on a switch port interface in the ingress direction.
- C. Packets that are dropped by IPv6 RA Guard cannot be spanned.
- D. It is not supported in hardware when TCAM is programmed.

Answer: A

NEW QUESTION 27


Drag and drop the OSPF adjacency states from the left onto the correct descriptions on the right.

Init	Each router compares the DBD packets that were received from the other router.
2-way	Routers exchange information with other routers in the multiaccess network.
Down	The neighboring router requests the other routers to send missing entries.
Exchange	The network has already elected a DR and a backup BDR.
ExStart	The OSPF router ID of the receiving router was not contained in the hello message.
Loading	No hellos have been received from a neighbor router.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

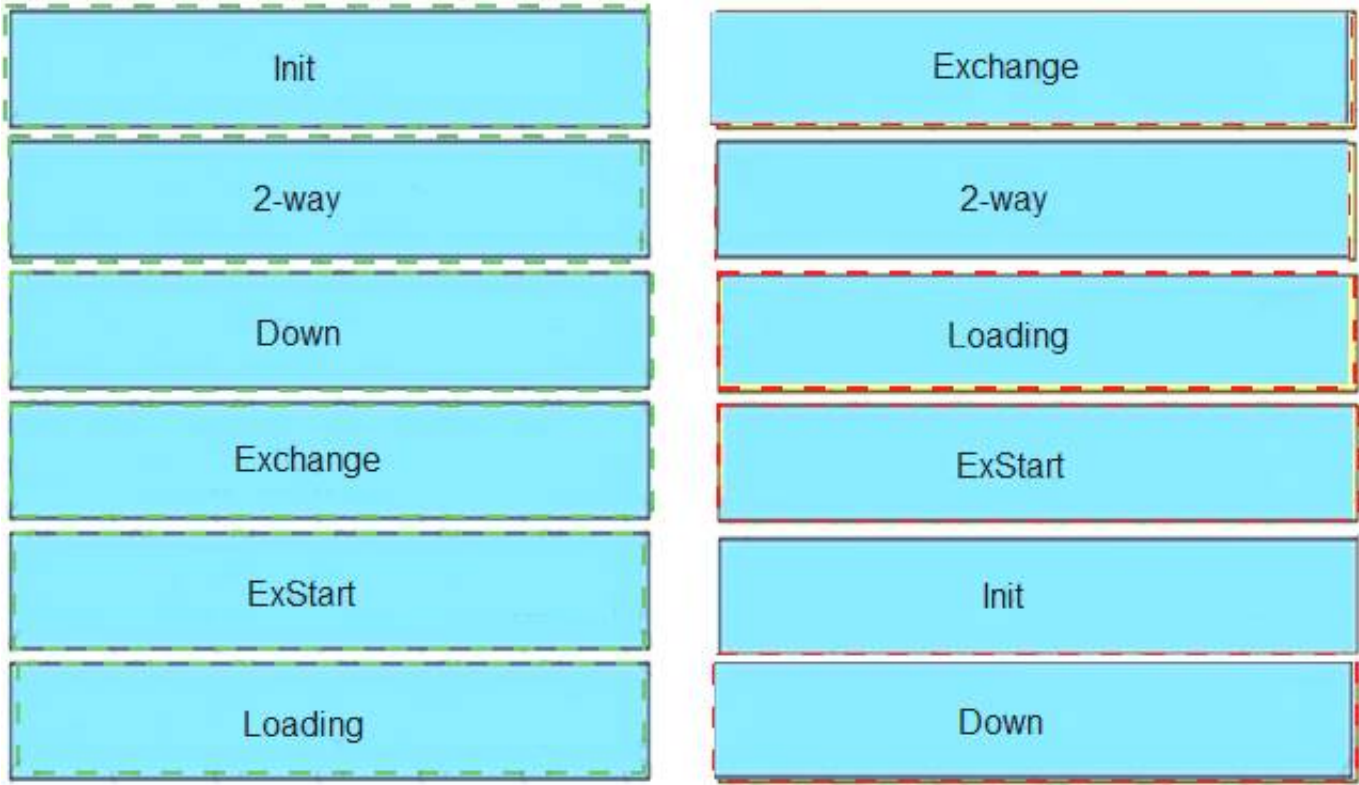

NEW QUESTION 29
.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

300-410 Practice Exam Features:

- * 300-410 Questions and Answers Updated Frequently
- * 300-410 Practice Questions Verified by Expert Senior Certified Staff
- * 300-410 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-410 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-410 Practice Test Here](#)