

Cisco

Exam Questions 300-730

Implementing Secure Solutions with Virtual Private Networks (SVPN)



NEW QUESTION 1

Which two changes must be made in order to migrate from DMVPN Phase 2 to Phase 3 when EIGRP is configured? (Choose two.)

- A. Add NHRP shortcuts on the hub.
- B. Add NHRP redirects on the spoke.
- C. Disable EIGRP next-hop-self on the hub.
- D. Enable EIGRP next-hop-self on the hub.
- E. Add NHRP redirects on the hub.

Answer: CE

NEW QUESTION 2

Which method dynamically installs the network routes for remote tunnel endpoints?

- A. policy-based routing
- B. CEF
- C. reverse route injection
- D. route filtering


Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/sec_conn_vpnnav/configuration/12-4t/sec-vpn-availability-12-4t-book/sec-rev-rte-inject.html

NEW QUESTION 3

Refer to the exhibit.

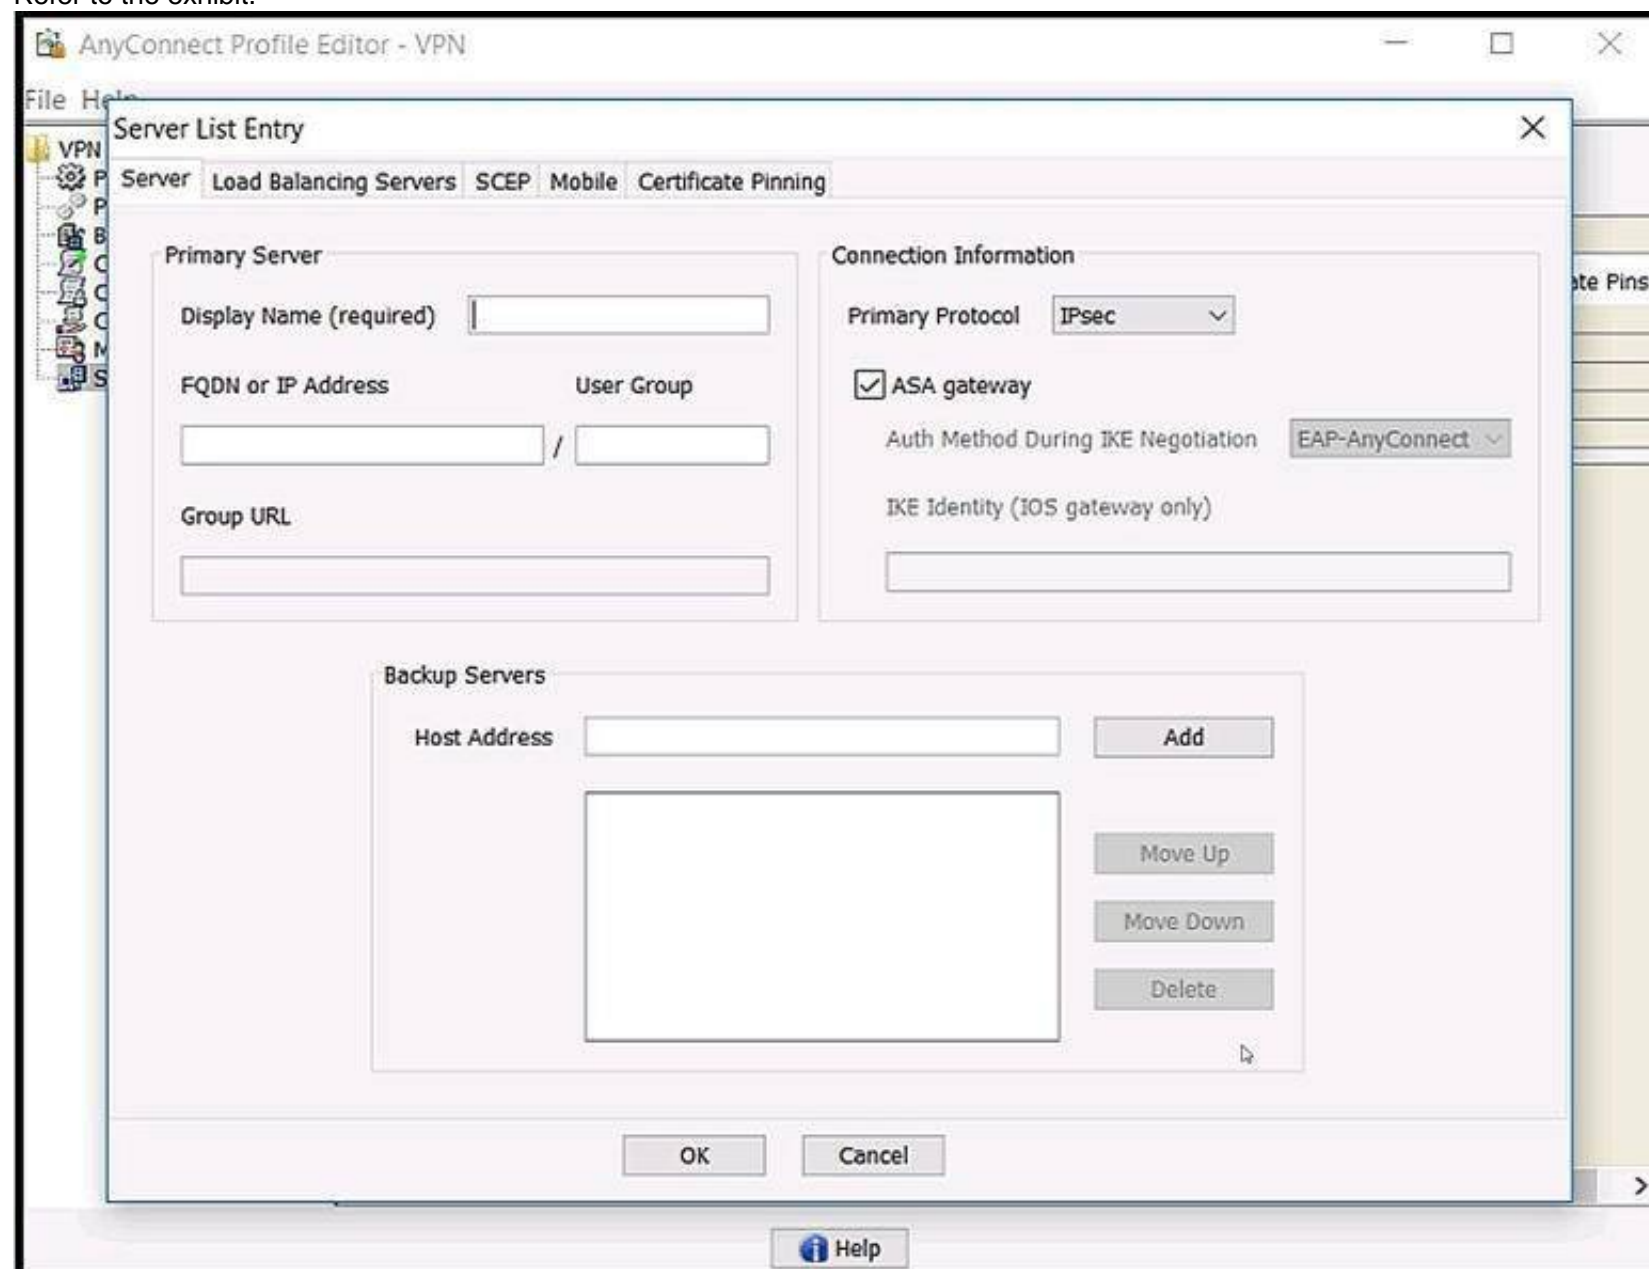

Which value must be configured in the User Group field when the Cisco AnyConnect Profile is created to connect to an ASA headend with IPsec as the primary protocol?

- A. address-pool
- B. group-alias
- C. group-policy
- D. tunnel-group

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/security/vpn_client/anyconnect/anyconnect41/administration/guide/b_AnyConnect_Administrator_Guide_4-1/configure-vpn.html

NEW QUESTION 4

A Cisco AnyConnect client establishes a SSL VPN connection with an ASA at the corporate office. An engineer must ensure that the client computer meets the enterprise security policy. Which feature can update the client to meet an enterprise security policy?

- A. Endpoint Assessment
- B. Cisco Secure Desktop
- C. Basic Host Scan
- D. Advanced Endpoint Assessment

Answer: D

NEW QUESTION 5

Which two features provide headend resiliency for Cisco AnyConnect clients? (Choose two.)

- A. AnyConnect Auto Reconnect
- B. AnyConnect Network Access Manager
- C. AnyConnect Backup Servers
- D. ASA failover
- E. AnyConnect Always On

Answer: CD

NEW QUESTION 6


Under which section must a bookmark or URL list be configured on a Cisco ASA to be available for clientless SSLVPN users?

- A. tunnel-group (general-attributes)
- B. tunnel-group (webvpn-attributes)
- C. webvpn (group-policy)
- D. webvpn (global configuration)

Answer: D

NEW QUESTION 7

Refer to the exhibit.

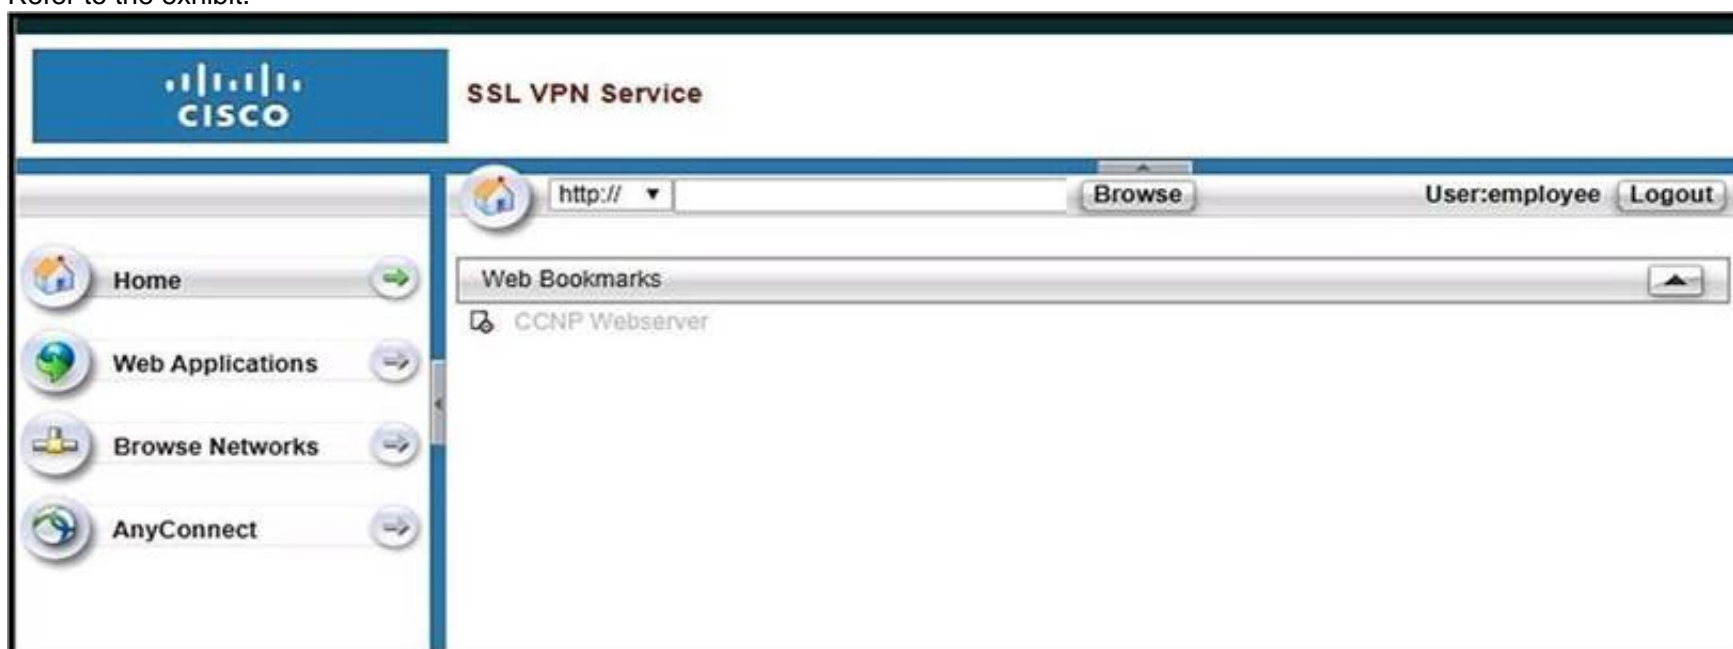

Based on the exhibit, why are users unable to access CCNP Webserver bookmark?

- A. The URL is being blocked by a WebACL.
- B. The ASA cannot resolve the URL.
- C. The bookmark has been disabled.
- D. The user cannot access the URL.

Answer: C

NEW QUESTION 8

Refer to the exhibit.

```
group-policy DfltGrpPolicy internal
group-policy DfltGrpPolicy attributes
  banner none
  dns-server value 10.10.10.10
  vpn-tunnel-protocol ssl-clientless
  default-domain value cisco.com
  address-pools value ACPool

group-policy Admin_Group internal
group-policy Admin_Group attributes
  vpn-simultaneous-logins 10
  vpn-tunnel-protocol ikev2 ssl-clientless
  split-tunnel-policy tunnelall

tunnel-group Admins type remote-access
tunnel-group Admins general-attributes
  default-group-policy Admin_Group
tunnel-group Admins webvpn-attributes
  group-alias Admins enable

tunnel-group Employee type remote-access
tunnel-group Employee webvpn-attributes
  group-alias Employee enable

webvpn
  enable outside
  anyconnect image disk0:/anyconnect-win-4.7.01076-webdeploy-k9.pkg 1
  anyconnect enable
  tunnel-group-list enable
```

Which VPN technology is allowed for users connecting to the Employee tunnel group?

- A. SSL AnyConnect
- B. IKEv2 AnyConnect
- C. crypto map
- D. clientless

Answer: B

NEW QUESTION 9

In a FlexVPN deployment, the spokes successfully connect to the hub, but spoke-to-spoke tunnels do not form. Which troubleshooting step solves the issue?

- A. Verify the spoke configuration to check if the NHRP redirect is enabled.
- B. Verify that the spoke receives redirect messages and sends resolution requests.
- C. Verify the hub configuration to check if the NHRP shortcut is enabled.
- D. Verify that the tunnel interface is contained within a VRF.

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/sec_conn_dmvpn/configuration/15-mt/sec-conn-dmvpn-15-mt-book/sec-conn-dmvpn-summaps.pdf

NEW QUESTION 10

Refer to the exhibit.


```
IKEv2:(SESSION ID = 17,SA ID = 1):Processing IKE_AUTH message
IKEv2:IPSec policy validate request sent for profile CloudOne with psh index 1.

IKEv2:(SESSION ID = 17,SA ID = 1):
IKEv2:(SA ID = 1):[IPsec -> IKEv2] Callback received for the validate proposal - FAILED.

IKEv2-ERROR:(SESSION ID = 17,SA ID = 1):: There was no IPSEC policy found for received TS
IKEv2:(SESSION ID = 17,SA ID = 1):Sending TS unacceptable notify
IKEv2:(SESSION ID = 17,SA ID = 1):Get my authentication method
IKEv2:(SESSION ID = 17,SA ID = 1):My authentication method is 'PSK'
IKEv2:(SESSION ID = 17,SA ID = 1):Get peer's preshared key for 68.72.250.251
IKEv2:(SESSION ID = 17,SA ID = 1):Generate my authentication data
IKEv2:(SESSION ID = 17,SA ID = 1):Use preshared key for id 68.72.250.250, key len 5
IKEv2:[IKEv2 -> Crypto Engine] Generate IKEv2 authentication data
IKEv2:[Crypto Engine -> IKEv2] IKEv2 authentication data generation PASSED
IKEv2:(SESSION ID = 17,SA ID = 1):Get my authentication method
IKEv2:(SESSION ID = 17,SA ID = 1):My authentication method is 'PSK'
IKEv2:(SESSION ID = 17,SA ID = 1):Generating IKE_AUTH message
IKEv2:(SESSION ID = 17,SA ID = 1):Constructing IDr payload: '68.72.250.250' of type 'IPv4 address'
IKEv2:(SESSION ID = 17,SA ID = 1):Building packet for encryption.
Payload contents:
  VID IDr AUTH NOTIFY(TS_UNACCEPTABLE)

IKEv2:(SESSION ID = 17,SA ID = 1):Sending Packet [To 68.72.250.251:500/From 68.72.250.250:500/VRF i0:f0]
Initiator SPI : 3D527B1D50DBEEF4 - Responder SPI : 8C693F77F2656636 Message id: 1
IKEv2 IKE_AUTH Exchange RESPONSE
Payload contents:
  ENCR
```

Based on the debug output, which type of mismatch is preventing the VPN from coming up?

- A. interesting traffic
- B. lifetime
- C. preshared key
- D. PFS

Answer: B

Explanation:

If the responder's policy does not allow it to accept any part of the proposed Traffic Selectors, it responds with a TS_UNACCEPTABLE Notify message.

NEW QUESTION 10

Refer to the exhibit.

HUB configuration:

```
crypto ikev2 profile default
match identity remote fqdn domain cisco.com
identity local fqdn hub.cisco.com
authentication local rsa-sig
authentication remote pre-shared-key cisco
pki trustpoint CA
aaa authorization group cert list default default
virtual-template 1
```

SPOKE 1 configuration:

```
crypto ikev2 profile default
match identity remote fqdn domain cisco.com
identity local fqdn spoke.cisco.com
authentication local rsa-sig
authentication remote pre-shared-key cisco
pki trustpoint CA
aaa authorization group cert list default default
virtual-template 1
```

SPOKE 2 configuration:

```
crypto ikev2 profile default
match identity remote fqdn domain cisco.com
identity local fqdn spoke2.cisco.com
authentication local pre-shared-key flexvpn
authentication remote rsa-sig
pki trustpoint CA
aaa authorization group cert list default default
virtual-template 1
```


What is a result of this configuration?

- A. Spoke 1 fails the authentication because the authentication methods are incorrect.
- B. Spoke 2 passes the authentication to the hub and successfully proceeds to phase 2.
- C. Spoke 2 fails the authentication because the remote authentication method is incorrect.
- D. Spoke 1 passes the authentication to the hub and successfully proceeds to phase 2.

Answer: A

NEW QUESTION 12

Refer to the exhibit.

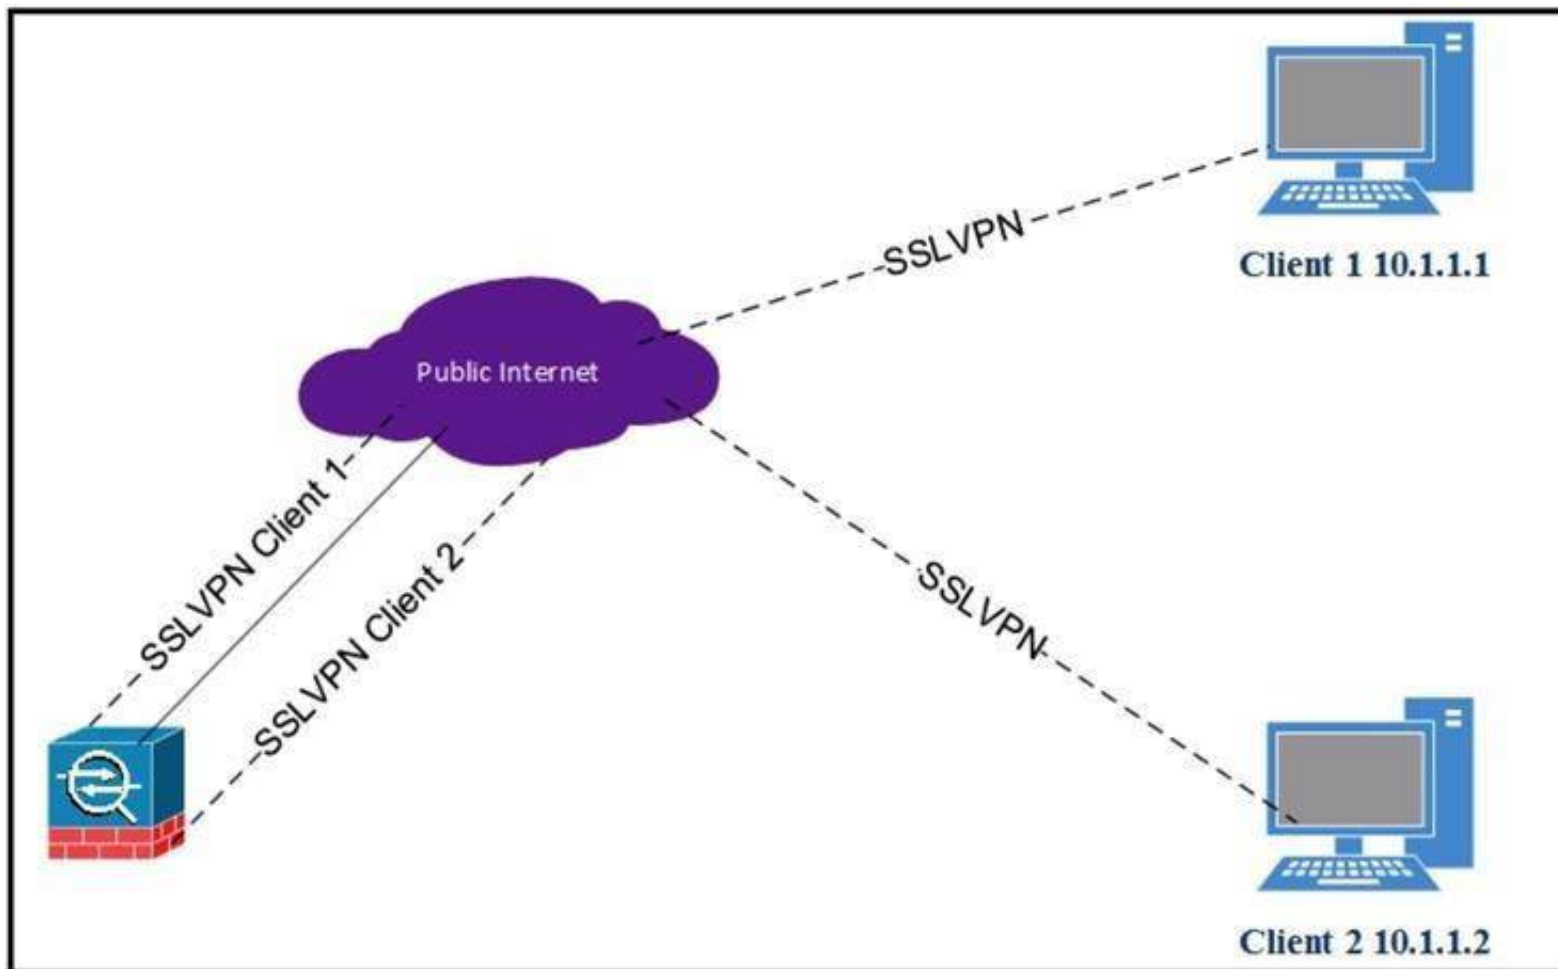

Client 1 cannot communicate with client 2. Both clients are using Cisco AnyConnect and have established a successful SSL VPN connection to the hub ASA. Which command on the ASA is missing?

- A. dns-server value 10.1.1.2
- B. same-security-traffic permit intra-interface
- C. same-security-traffic permit inter-interface
- D. dns-server value 10.1.1.3

Answer: B

NEW QUESTION 16

Which redundancy protocol must be implemented for IPsec stateless failover to work?

- A. SSO
- B. GLBP
- C. HSRP
- D. VRRP

Answer: C

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security-vpn/ipsec-negotiation-ike-protocols/17826-ipsec-feat.html>

NEW QUESTION 20

Which technology works with IPsec stateful failover?

- A. GLBR
- B. HSRP
- C. GRE
- D. VRRP

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/ios/12_2/12_2y/12_2yx11/feature/guide/ft_vpnha.html#wp1122512

NEW QUESTION 25

What are two functions of ECDH and ECDSA? (Choose two.)

- A. nonrepudiation
- B. revocation
- C. digital signature
- D. key exchange
- E. encryption

Answer: CD

Explanation:

Reference: https://tools.cisco.com/security/center/resources/next_generation_cryptography

NEW QUESTION 29


Which two remote access VPN solutions support SSL? (Choose two.)

- A. FlexVPN
- B. clientless
- C. EZVPN
- D. L2TP
- E. Cisco AnyConnect

Answer: BE

NEW QUESTION 31

Refer to the exhibit.

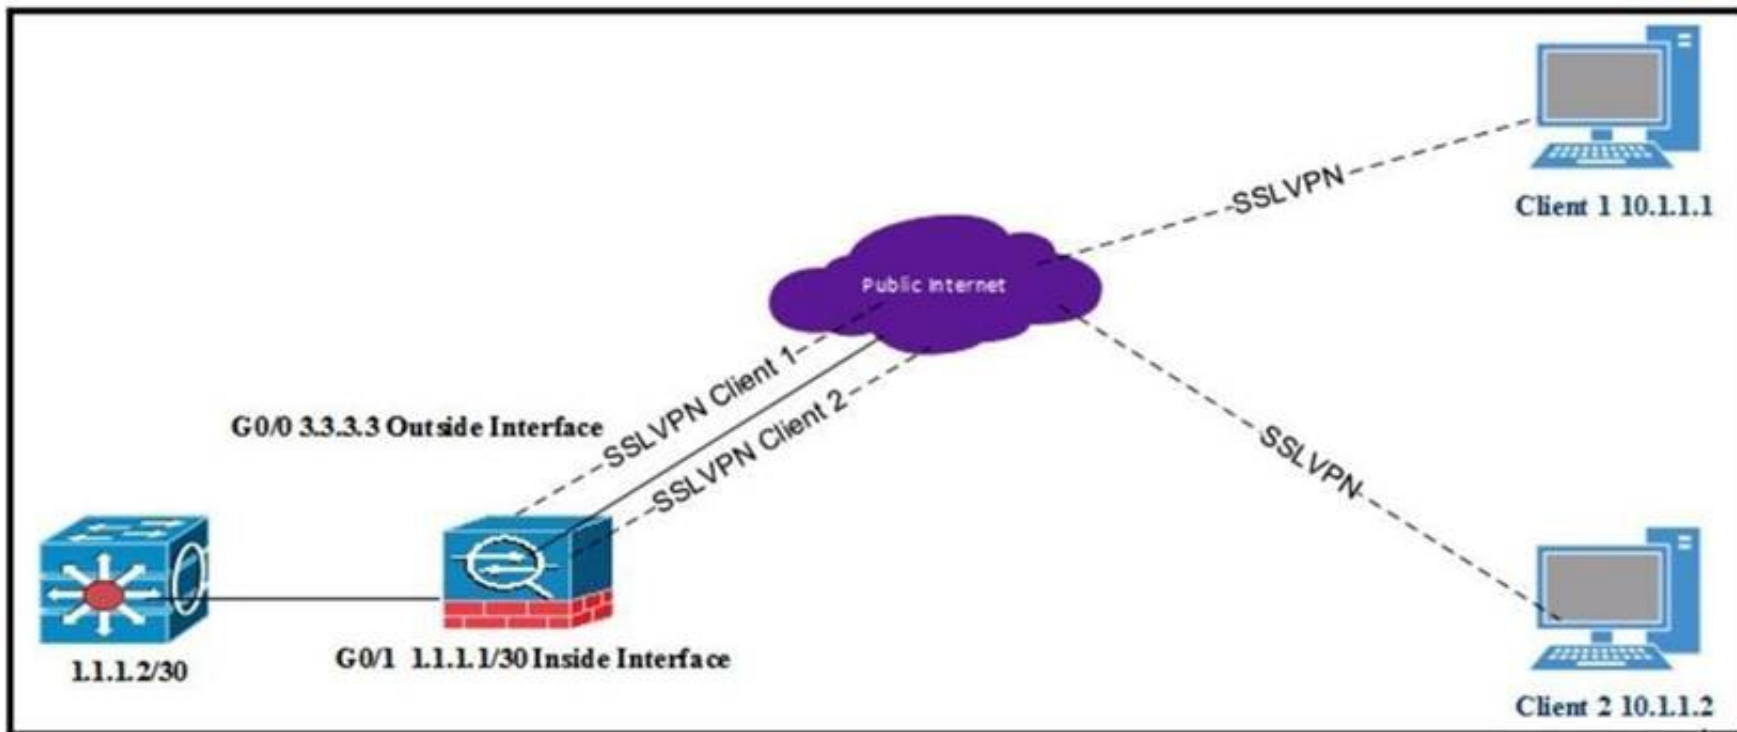

All internal clients behind the ASA are port address translated to the public outside interface that has an IP address of 3.3.3.3. Client 1 and client 2 have established successful SSL VPN connections to the ASA. What must be implemented so that "3.3.3.3" is returned from a browser search on the IP address?

- A. Same-security-traffic permit inter-interface under Group Policy
- B. Exclude Network List Below under Group Policy
- C. Tunnel All Networks under Group Policy
- D. Tunnel Network List Below under Group Policy

Answer: D

NEW QUESTION 36

Which parameter must match on all routers in a DMVPN Phase 3 cloud?

- A. GRE tunnel key
- B. NHRP network ID
- C. tunnel VRF
- D. EIGRP split-horizon setting

Answer: A

NEW QUESTION 38

What is a requirement for smart tunnels to function properly?

- A. Java or ActiveX must be enabled on the client machine.
- B. Applications must be UDP.
- C. Stateful failover must not be configured.
- D. The user on the client machine must have admin access.

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security/asa-5500-x-series-next-generation-firewalls/111007-smart-tunnel-asa-00.html>

NEW QUESTION 42

Where is split tunneling defined for IKEv2 remote access clients on a Cisco router?

- A. IKEv2 authorization policy
- B. Group Policy
- C. virtual template
- D. webvpn context

Answer: B

NEW QUESTION 43

Refer to the exhibit.

```
ip access-list extended CCNP
 permit 192.168.0.10
 permit 192.168.0.11

webvpn gateway SSL_Gateway
 ip address 172.16.0.25 port 443
 ssl trustpoint AnyConnect_Cert
 inservice

webvpn context SSL_Context
 gateway SSL_Gateway

 ssl authenticate verify all
 inservice

policy group SSL_Policy
 functions svc-enabled
  svc address-pool "ACPool" netmask 255.255.255.0
  svc dns-server primary 192.168.0.100
  svc default-domain cisco.com
 default-group-policy SSL_Policy
```

Cisco AnyConnect must be set up on a router to allow users to access internal servers 192.168.0.10 and 192.168.0.11. All other traffic should go out of the client's local NIC. Which command accomplishes this configuration?

- A. svc split include 192.168.0.0 255.255.255.0
- B. svc split exclude 192.168.0.0 255.255.255.0
- C. svc split include acl CCNP
- D. svc split exclude acl CCNP

Answer: C**NEW QUESTION 45**

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-730 Practice Exam Features:

- * 300-730 Questions and Answers Updated Frequently
- * 300-730 Practice Questions Verified by Expert Senior Certified Staff
- * 300-730 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-730 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-730 Practice Test Here](#)