

Associate-Cloud-Engineer Dumps

Google Cloud Certified - Associate Cloud Engineer

<https://www.certleader.com/Associate-Cloud-Engineer-dumps.html>



NEW QUESTION 1

Your company runs one batch process in an on-premises server that takes around 30 hours to complete. The task runs monthly, can be performed offline, and must be restarted if interrupted. You want to migrate this workload to the cloud while minimizing cost. What should you do?

- A. Migrate the workload to a Compute Engine Preemptible VM.
- B. Migrate the workload to a Google Kubernetes Engine cluster with Preemptible nodes.
- C. Migrate the workload to a Compute Engine V
- D. Start and stop the instance as needed.
- E. Create an Instance Template with Preemptible VMs O
- F. Create a Managed Instance Group from the template and adjust Target CPU Utilizatio
- G. Migrate the workload.

Answer: B

NEW QUESTION 2

You are analyzing Google Cloud Platform service costs from three separate projects. You want to use this information to create service cost estimates by service type, daily and monthly, for the next six months using standard query syntax. What should you do?

- A. Export your bill to a Cloud Storage bucket, and then import into Cloud Bigtable for analysis.
- B. Export your bill to a Cloud Storage bucket, and then import into Google Sheets for analysis.
- C. Export your transactions to a local file, and perform analysis with a desktop tool.
- D. Export your bill to a BigQuery dataset, and then write time window-based SQL queries for analysis.

Answer: D

NEW QUESTION 3

You are the organization and billing administrator for your company. The engineering team has the Project Creator role on the organization. You do not want the engineering team to be able to link projects to the billing account. Only the finance team should be able to link a project to a billing account, but they should not be able to make any other changes to projects. What should you do?

- A. Assign the finance team only the Billing Account User role on the billing account.
- B. Assign the engineering team only the Billing Account User role on the billing account.
- C. Assign the finance team the Billing Account User role on the billing account and the Project Billing Manager role on the organization.
- D. Assign the engineering team the Billing Account User role on the billing account and the Project Billing Manager role on the organization.

Answer: D

NEW QUESTION 4

You are building a new version of an application hosted in an App Engine environment. You want to test the new version with 1% of users before you completely switch your application over to the new version. What should you do?

- A. Deploy a new version of your application in Google Kubernetes Engine instead of App Engine and then use GCP Console to split traffic.
- B. Deploy a new version of your application in a Compute Engine instance instead of App Engine and then use GCP Console to split traffic.
- C. Deploy a new version as a separate app in App Engin
- D. Then configure App Engine using GCP Console to split traffic between the two apps.
- E. Deploy a new version of your application in App Engin
- F. Then go to App Engine settings in GCP Console and split traffic between the current version and newly deployed versions accordingly.

Answer: A

NEW QUESTION 5

You have a single binary application that you want to run on Google Cloud Platform. You decided to automatically scale the application based on underlying infrastructure CPU usage. Your organizational policies require you to use virtual machines directly. You need to ensure that the application scaling is operationally efficient and completed as quickly as possible. What should you do?

- A. Create a Google Kubernetes Engine cluster, and use horizontal pod autoscaling to scale the application.
- B. Create an instance template, and use the template in a managed instance group with autoscaling configured.
- C. Create an instance template, and use the template in a managed instance group that scales up and down based on the time of day.
- D. Use a set of third-party tools to build automation around scaling the application up and down, based on Stackdriver CPU usage monitoring.

Answer: A

NEW QUESTION 6

Your projects incurred more costs than you expected last month. Your research reveals that a development GKE container emitted a huge number of logs, which resulted in higher costs. You want to disable the logs quickly using the minimum number of steps. What should you do?

- A. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE container resource.
- B. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE Cluster Operations resource.
- C. 1. Go to the GKE console, and delete existing clusters.2. Recreate a new cluster.3. Clear the option to enable legacy Stackdriver Logging.
- D. 1. Go to the GKE console, and delete existing clusters.2. Recreate a new cluster.3. Clear the option to enable legacy Stackdriver Monitoring.

Answer: A

NEW QUESTION 7

Your company publishes large files on an Apache web server that runs on a Compute Engine instance. The Apache web server is not the only application running in the project. You want to receive an email when the egress network costs for the server exceed 100 dollars for the current month as measured by Google Cloud Platform (GCP). What should you do?

- A. Set up a budget alert on the project with an amount of 100 dollars, a threshold of 100%, and notification type of "email."
- B. Set up a budget alert on the billing account with an amount of 100 dollars, a threshold of 100%, and notification type of "email."
- C. Export the billing data to BigQuery
- D. Create a Cloud Function that uses BigQuery to sum the egress network costs of the exported billing data for the Apache web server for the current month and sends an email if it is over 100 dollar
- E. Schedule the Cloud Function using Cloud Scheduler to run hourly.
- F. Use the Stackdriver Logging Agent to export the Apache web server logs to Stackdriver Logging. Create a Cloud Function that uses BigQuery to parse the HTTP response log data in Stackdriver for the current month and sends an email if the size of all HTTP responses, multiplied by current GCP egress prices, totals over 100 dollar
- G. Schedule the Cloud Function using Cloud Scheduler to run hourly.

Answer: D

NEW QUESTION 8

You need to set up permissions for a set of Compute Engine instances to enable them to write data into a particular Cloud Storage bucket. You want to follow Google-recommended practices. What should you do?

- A. Create a service account with an access scop
- B. Use the access scope 'https://www.googleapis.com/auth/devstorage.write_only'.
- C. Create a service account with an access scop
- D. Use the access scope 'https://www.googleapis.com/auth/cloud-platform'.
- E. Create a service account and add it to the IAM role 'storage.objectCreator' for that bucket.
- F. Create a service account and add it to the IAM role 'storage.objectAdmin' for that bucket.

Answer: B

NEW QUESTION 9

You have a website hosted on App Engine standard environment. You want 1% of your users to see a new test version of the website. You want to minimize complexity. What should you do?

- A. Deploy the new version in the same application and use the --migrate option.
- B. Deploy the new version in the same application and use the --splits option to give a weight of 99 to the current version and a weight of 1 to the new version.
- C. Create a new App Engine application in the same projec
- D. Deploy the new version in that application. Use the App Engine library to proxy 1% of the requests to the new version.
- E. Create a new App Engine application in the same projec
- F. Deploy the new version in that application. Configure your network load balancer to send 1% of the traffic to that new application.

Answer: B

NEW QUESTION 10

You have an application that uses Cloud Spanner as a backend database. The application has a very predictable traffic pattern. You want to automatically scale up or down the number of Spanner nodes depending on traffic. What should you do?

- A. Create a cron job that runs on a scheduled basis to review stackdriver monitoring metrics, and then resize the Spanner instance accordingly.
- B. Create a Stackdriver alerting policy to send an alert to oncall SRE emails when Cloud Spanner CPU exceeds the threshol
- C. SREs would scale resources up or down accordingly.
- D. Create a Stackdriver alerting policy to send an alert to Google Cloud Support email when Cloud Spanner CPU exceeds your threshol
- E. Google support would scale resources up or down accordingly.
- F. Create a Stackdriver alerting policy to send an alert to webhook when Cloud Spanner CPU is over or under your threshol
- G. Create a Cloud Function that listens to HTTP and resizes Spanner resources accordingly.

Answer: D

NEW QUESTION 10

Your company has an existing GCP organization with hundreds of projects and a billing account. Your company recently acquired another company that also has hundreds of projects and its own billing account. You would like to consolidate all GCP costs of both GCP organizations onto a single invoice. You would like to consolidate all costs as of tomorrow. What should you do?

- A. Link the acquired company's projects to your company's billing account.
- B. Configure the acquired company's billing account and your company's billing account to export the billing data into the same BigQuery dataset.
- C. Migrate the acquired company's projects into your company's GCP organizatio
- D. Link the migrated projects to your company's billing account.
- E. Create a new GCP organization and a new billing accoun
- F. Migrate the acquired company's projects and your company's projects into the new GCP organization and link the projects to the new billing account.

Answer: D

NEW QUESTION 14

You are asked to set up application performance monitoring on Google Cloud projects A, B, and C as a single pane of glass. You want to monitor CPU, memory, and disk. What should you do?

- A. Enable API and then share charts from project A, B, and C.
- B. Enable API and then give the metrics.reader role to projects A, B, and C.
- C. Enable API and then use default dashboards to view all projects in sequence.

D. Enable API, create a workspace under project A, and then add project B and C.

Answer: D

NEW QUESTION 19

You are using Data Studio to visualize a table from your data warehouse that is built on top of BigQuery. Data is appended to the data warehouse during the day. At night, the daily summary is recalculated by overwriting the table. You just noticed that the charts in Data Studio are broken, and you want to analyze the problem. What should you do?

- A. Use the BigQuery interface to review the nightly Job and look for any errors
- B. Review the Error Reporting page in the Cloud Console to find any errors.
- C. In Cloud Logging create a filter for your Data Studio report
- D. Use Cloud Debugger to find out why the data was not refreshed correctly

Answer: D

NEW QUESTION 20

You have successfully created a development environment in a project for an application. This application uses Compute Engine and Cloud SQL. Now, you need to create a production environment for this application.

The security team has forbidden the existence of network routes between these 2 environments, and asks you to follow Google-recommended practices. What should you do?

- A. Create a new project, enable the Compute Engine and Cloud SQL APIs in that project, and replicate the setup you have created in the development environment.
- B. Create a new production subnet in the existing VPC and a new production Cloud SQL instance in your existing project, and deploy your application using those resources.
- C. Create a new project, modify your existing VPC to be a Shared VPC, share that VPC with your new project, and replicate the setup you have in the development environment in that new project, in the Shared VPC.
- D. Ask the security team to grant you the Project Editor role in an existing production project used by another division of your company.
- E. Once they grant you that role, replicate the setup you have in the development environment in that project.

Answer: A

NEW QUESTION 23

You have deployed multiple Linux instances on Compute Engine. You plan on adding more instances in the coming weeks. You want to be able to access all of these instances through your SSH client over the Internet without having to configure specific access on the existing and new instances. You do not want the Compute Engine instances to have a public IP. What should you do?

- A. Configure Cloud Identity-Aware Proxy (or HTTPS resources)
- B. Configure Cloud Identity-Aware Proxy for SSH and TCP resources.
- C. Create an SSH keypair and store the public key as a project-wide SSH Key
- D. Create an SSH keypair and store the private key as a project-wide SSH Key

Answer: C

NEW QUESTION 24

You recently deployed a new version of an application to App Engine and then discovered a bug in the release. You need to immediately revert to the prior version of the application. What should you do?

- A. Run `gcloud app restore`.
- B. On the App Engine page of the GCP Console, select the application that needs to be reverted and click Revert.
- C. On the App Engine Versions page of the GCP Console, route 100% of the traffic to the previous version.
- D. Deploy the original version as a separate application.
- E. Then go to App Engine settings and split traffic between applications so that the original version serves 100% of the requests.

Answer: D

NEW QUESTION 29

You built an application on your development laptop that uses Google Cloud services. Your application uses Application Default Credentials for authentication and works fine on your development laptop. You want to migrate this application to a Compute Engine virtual machine (VM) and set up authentication using Google-recommended practices and minimal changes. What should you do?

- A. Assign appropriate access for Google services to the service account used by the Compute Engine VM.
- B. Create a service account with appropriate access for Google services, and configure the application to use this account.
- C. Store credentials for service accounts with appropriate access for Google services in a config file, and deploy this config file with your application.
- D. Store credentials for your user account with appropriate access for Google services in a config file, and deploy this config file with your application.

Answer: B

NEW QUESTION 31

Your development team needs a new Jenkins server for their project. You need to deploy the server using the fewest steps possible. What should you do?

- A. Download and deploy the Jenkins Java WAR to App Engine Standard.
- B. Create a new Compute Engine instance and install Jenkins through the command line interface.
- C. Create a Kubernetes cluster on Compute Engine and create a deployment with the Jenkins Docker image.
- D. Use GCP Marketplace to launch the Jenkins solution.

Answer: D

NEW QUESTION 35

You have an object in a Cloud Storage bucket that you want to share with an external company. The object contains sensitive data. You want access to the content to be removed after four hours. The external company does not have a Google account to which you can grant specific user-based access privileges. You want to use the most secure method that requires the fewest steps. What should you do?

- A. Create a signed URL with a four-hour expiration and share the URL with the company.
- B. Set object access to 'public' and use object lifecycle management to remove the object after four hours.
- C. Configure the storage bucket as a static website and furnish the object's URL to the company.
- D. Delete the object from the storage bucket after four hours.
- E. Create a new Cloud Storage bucket specifically for the external company to access.
- F. Copy the object to that bucket.
- G. Delete the bucket after four hours have passed.

Answer: A

NEW QUESTION 37

You need to verify that a Google Cloud Platform service account was created at a particular time. What should you do?

- A. Filter the Activity log to view the Configuration category.
- B. Filter the Resource type to Service Account.
- C. Filter the Activity log to view the Configuration category.
- D. Filter the Resource type to Google Project.
- E. Filter the Activity log to view the Data Access category.
- F. Filter the Resource type to Service Account.
- G. Filter the Activity log to view the Data Access category.
- H. Filter the Resource type to Google Project.

Answer: D

NEW QUESTION 41

Your company runs its Linux workloads on Compute Engine instances. Your company will be working with a new operations partner that does not use Google Accounts. You need to grant access to the instances to your operations partner so they can maintain the installed tooling. What should you do?

- A. Enable Cloud IAP for the Compute Engine instances, and add the operations partner as a Cloud IAP Tunnel User.
- B. Tag all the instances with the same network tag.
- C. Create a firewall rule in the VPC to grant TCP access on port 22 for traffic from the operations partner to instances with the network tag.
- D. Set up Cloud VPN between your Google Cloud VPC and the internal network of the operations partner.
- E. Ask the operations partner to generate SSH key pairs, and add the public keys to the VM instances.

Answer: B

NEW QUESTION 46

You want to configure autohealing for network load balancing for a group of Compute Engine instances that run in multiple zones, using the fewest possible steps. You need to configure re-creation of VMs if they are unresponsive after 3 attempts of 10 seconds each. What should you do?

- A. Create an HTTP load balancer with a backend configuration that references an existing instance group. Set the health check to healthy (HTTP).
- B. Create an HTTP load balancer with a backend configuration that references an existing instance group. Define a balancing mode and set the maximum RPS to 10.
- C. Create a managed instance group.
- D. Set the Autohealing health check to healthy (HTTP).
- E. Create a managed instance group.
- F. Verify that the autoscaling setting is on.

Answer: A

NEW QUESTION 48

You need to host an application on a Compute Engine instance in a project shared with other teams. You want to prevent the other teams from accidentally causing downtime on that application. Which feature should you use?

- A. Use a Shielded VM.
- B. Use a Preemptible VM.
- C. Use a sole-tenant node.
- D. Enable deletion protection on the instance.

Answer: D

NEW QUESTION 50

You have a workload running on Compute Engine that is critical to your business. You want to ensure that the data on the boot disk of this workload is backed up regularly. You need to be able to restore a backup as quickly as possible in case of disaster. You also want older backups to be cleaned automatically to save on cost. You want to follow Google-recommended practices. What should you do?

- A. Create a Cloud Function to create an instance template.
- B. Create a snapshot schedule for the disk using the desired interval.
- C. Create a cron job to create a new disk from the disk using gcloud.
- D. Create a Cloud Task to create an image and export it to Cloud Storage.

Answer: B

NEW QUESTION 52

Your organization has three existing Google Cloud projects. You need to bill the Marketing department for only their Google Cloud services for a new initiative within their group. What should you do?

- A. * 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud Project for the Marketing department* 2. Link the new project to a Marketing Billing Account
- B. * 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department* 3. Set the default key-value project labels to department marketing for all services in this project
- C. * 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department 3. Link the new project to a Marketing Billing Account.
- D. * 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department* 3. Set the default key value project labels to department marketing for all services in this project

Answer: A

NEW QUESTION 57

Every employee of your company has a Google account. Your operational team needs to manage a large number of instances on Compute Engine. Each member of this team needs only administrative access to the servers. Your security team wants to ensure that the deployment of credentials is operationally efficient and must be able to determine who accessed a given instance. What should you do?

- A. Generate a new SSH key pair
- B. Give the private key to each member of your team
- C. Configure the public key in the metadata of each instance.
- D. Ask each member of the team to generate a new SSH key pair and to send you their public key
- E. Use a configuration management tool to deploy those keys on each instance.
- F. Ask each member of the team to generate a new SSH key pair and to add the public key to their Google account
- G. Grant the "compute.osAdminLogin" role to the Google group corresponding to this team.
- H. Generate a new SSH key pair
- I. Give the private key to each member of your team
- J. Configure the public key as a project-wide public SSH key in your Cloud Platform project and allow project-wide public SSH keys on each instance.

Answer: C

Explanation:

<https://cloud.google.com/compute/docs/instances/managing-instance-access>

NEW QUESTION 62

You've deployed a microservice called myapp1 to a Google Kubernetes Engine cluster using the YAML file specified below:

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: myapp1-deployment
spec:
  selector:
    matchLabels:
      app: myapp1
  replicas: 2
  template:
    metadata:
      labels:
        app: myapp1
    spec:
      containers:
      - name: main-container
        image: gcr.io/my-company-repo/myapp1:1.4
        env:
        - name: DB_PASSWORD
          value: "t0ugh2guess!"
      ports:
      - containerPort: 8080
```

You need to refactor this configuration so that the database password is not stored in plain text. You want to follow Google-recommended practices. What should you do?

- A. Store the database password inside the Docker image of the container, not in the YAML file.
- B. Store the database password inside a Secret object
- C. Modify the YAML file to populate the DB_PASSWORD environment variable from the Secret.
- D. Store the database password inside a ConfigMap object
- E. Modify the YAML file to populate the DB_PASSWORD environment variable from the ConfigMap.
- F. Store the database password in a file inside a Kubernetes persistent volume, and use a persistent volume claim to mount the volume to the container.

Answer: C

NEW QUESTION 65

You received a JSON file that contained a private key of a Service Account in order to get access to several resources in a Google Cloud project. You downloaded

and installed the Cloud SDK and want to use this private key for authentication and authorization when performing gcloud commands. What should you do?

- A. Use the command `gcloud auth login` and point it to the private key
- B. Use the command `gcloud auth activate-service-account` and point it to the private key
- C. Place the private key file in the installation directory of the Cloud SDK and rename it to "credentials.json"
- D. Place the private key file in your home directory and rename it to "GOOGLE_APPLICATION_CREDENTIALS".

Answer: A

NEW QUESTION 68

You are using Google Kubernetes Engine with autoscaling enabled to host a new application. You want to expose this new application to the public, using HTTPS on a public IP address. What should you do?

- A. Create a Kubernetes Service of type NodePort for your application, and a Kubernetes Ingress to expose this Service via a Cloud Load Balancer.
- B. Create a Kubernetes Service of type ClusterIP for your application
- C. Configure the public DNS name of your application using the IP of this Service.
- D. Create a Kubernetes Service of type NodePort to expose the application on port 443 of each node of the Kubernetes cluster
- E. Configure the public DNS name of your application with the IP of every node of the cluster to achieve load-balancing.
- F. Create a HAProxy pod in the cluster to load-balance the traffic to all the pods of the application. Forward the public traffic to HAProxy with an iptables rule
- G. Configure the DNS name of your application using the public IP of the node HAProxy is running on.

Answer: A

NEW QUESTION 70

You have a Google Cloud Platform account with access to both production and development projects. You need to create an automated process to list all compute instances in development and production projects on a daily basis. What should you do?

- A. Create two configurations using `gcloud config`
- B. Write a script that sets configurations as active, individually
- C. For each configuration, use `gcloud compute instances list` to get a list of compute resources.
- D. Create two configurations using `gsutil config`
- E. Write a script that sets configurations as active, individually
- F. For each configuration, use `gsutil compute instances list` to get a list of compute resources.
- G. Go to Cloud Shell and export this information to Cloud Storage on a daily basis.
- H. Go to GCP Console and export this information to Cloud SQL on a daily basis.

Answer: A

NEW QUESTION 72

You want to verify the IAM users and roles assigned within a GCP project named my-project. What should you do?

- A. Run `gcloud iam roles list`
- B. Review the output section.
- C. Run `gcloud iam service-accounts list`
- D. Review the output section.
- E. Navigate to the project and then to the IAM section in the GCP Console
- F. Review the members and roles.
- G. Navigate to the project and then to the Roles section in the GCP Console
- H. Review the roles and status.

Answer: D

NEW QUESTION 73

Your company uses a large number of Google Cloud services centralized in a single project. All teams have specific projects for testing and development. The DevOps team needs access to all of the production services in order to perform their job. You want to prevent Google Cloud product changes from broadening their permissions in the future. You want to follow Google-recommended practices. What should you do?

- A. Grant all members of the DevOps team the role of Project Editor on the organization level.
- B. Grant all members of the DevOps team the role of Project Editor on the production project.
- C. Create a custom role that combines the required permission
- D. Grant the DevOps team the custom role on the production project.
- E. Create a custom role that combines the required permission
- F. Grant the DevOps team the custom role on the organization level.

Answer: A

NEW QUESTION 74

You need to create a new billing account and then link it with an existing Google Cloud Platform project. What should you do?

- A. Verify that you are Project Billing Manager for the GCP project
- B. Update the existing project to link it to the existing billing account.
- C. Verify that you are Project Billing Manager for the GCP project
- D. Create a new billing account and link the new billing account to the existing project.
- E. Verify that you are Billing Administrator for the billing account
- F. Create a new project and link the new project to the existing billing account.
- G. Verify that you are Billing Administrator for the billing account
- H. Update the existing project to link it to the existing billing account.

Answer: C

NEW QUESTION 78

You want to select and configure a solution for storing and archiving data on Google Cloud Platform. You need to support compliance objectives for data from one geographic location. This data is archived after 30 days and needs to be accessed annually. What should you do?

- A. Select Multi-Regional Storage
- B. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.
- C. Select Multi-Regional Storage
- D. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- E. Select Regional Storage
- F. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- G. Select Regional Storage
- H. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.

Answer: C

NEW QUESTION 82

Your existing application running in Google Kubernetes Engine (GKE) consists of multiple pods running on four GKE n1-standard-2 nodes. You need to deploy additional pods requiring n2-highmem-16 nodes without any downtime. What should you do?

- A. Use gcloud container clusters upgrad
- B. Deploy the new services.
- C. Create a new Node Pool and specify machine type n2-highmem-16. Deploy the new pods.
- D. Create a new cluster with n2-highmem-16 node
- E. Redeploy the pods and delete the old cluster.
- F. Create a new cluster with both n1-standard-2 and n2-highmem-16 node
- G. Redeploy the pods and delete the old cluster.

Answer: B

NEW QUESTION 83

You need to manage multiple Google Cloud Platform (GCP) projects in the fewest steps possible. You want to configure the Google Cloud SDK command line interface (CLI) so that you can easily manage multiple GCP projects. What should you do?

- A. * 1. Create a configuration for each project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- B. * 1. Create a configuration for each project you need to manage.* 2. Use gcloud init to update the configuration values when you need to work with a non-default project
- C. * 1. Use the default configuration for one project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- D. * 1. Use the default configuration for one project you need to manage.* 2. Use gcloud init to update the configuration values when you need to work with a non-default project.

Answer: D

NEW QUESTION 85

You have an application on a general-purpose Compute Engine instance that is experiencing excessive disk read throttling on its Zonal SSD Persistent Disk. The application primarily reads large files from disk. The disk size is currently 350 GB. You want to provide the maximum amount of throughput while minimizing costs. What should you do?

- A. Increase the size of the disk to 1 TB.
- B. Increase the allocated CPU to the instance.
- C. Migrate to use a Local SSD on the instance.
- D. Migrate to use a Regional SSD on the instance.

Answer: C

NEW QUESTION 89

Your finance team wants to view the billing report for your projects. You want to make sure that the finance team does not get additional permissions to the project. What should you do?

- A. Add the group for the finance team to roles/billing user role.
- B. Add the group for the finance team to roles/billing admin role.
- C. Add the group for the finance team to roles/billing viewer role.
- D. Add the group for the finance team to roles/billing project/Manager role.

Answer: A

NEW QUESTION 91

You are assisting a new Google Cloud user who just installed the Google Cloud SDK on their VM. The server needs access to Cloud Storage. The user wants your help to create a new storage bucket. You need to make this change in multiple environments. What should you do?

- A. Use a Deployment Manager script to automate creating storage buckets in an appropriate region
- B. Use a local SSD to improve performance of the VM for the targeted workload
- C. Use the gsutil command to create a storage bucket in the same region as the VM
- D. Use a Persistent Disk SSD in the same zone as the VM to improve performance of the VM

Answer: A

NEW QUESTION 93

You create a new Google Kubernetes Engine (GKE) cluster and want to make sure that it always runs a supported and stable version of Kubernetes. What should you do?

- A. Enable the Node Auto-Repair feature for your GKE cluster.
- B. Enable the Node Auto-Upgrades feature for your GKE cluster.
- C. Select the latest available cluster version for your GKE cluster.
- D. Select "Container-Optimized OS (cos)" as a node image for your GKE cluster.

Answer: B

NEW QUESTION 98

You have a virtual machine that is currently configured with 2 vCPUs and 4 GB of memory. It is running out of memory. You want to upgrade the virtual machine to have 8 GB of memory. What should you do?

- A. Rely on live migration to move the workload to a machine with more memory.
- B. Use gcloud to add metadata to the V
- C. Set the key to required-memory-size and the value to 8 GB.
- D. Stop the VM, change the machine type to n1-standard-8, and start the VM.
- E. Stop the VM, increase the memory to 8 GB, and start the VM.

Answer: D

NEW QUESTION 102

You have designed a solution on Google Cloud Platform (GCP) that uses multiple GCP products. Your company has asked you to estimate the costs of the solution. You need to provide estimates for the monthly total cost. What should you do?

- A. For each GCP product in the solution, review the pricing details on the products pricing pag
- B. Use the pricing calculator to total the monthly costs for each GCP product.
- C. For each GCP product in the solution, review the pricing details on the products pricing pag
- D. Create a Google Sheet that summarizes the expected monthly costs for each product.
- E. Provision the solution on GC
- F. Leave the solution provisioned for 1 wee
- G. Navigate to the Billing Report page in the Google Cloud Platform Consol
- H. Multiply the 1 week cost to determine the monthly costs.
- I. Provision the solution on GC
- J. Leave the solution provisioned for 1 wee
- K. Use Stackdriver to determine the provisioned and used resource amount
- L. Multiply the 1 week cost to determine the monthly costs.

Answer: A

NEW QUESTION 105

You are storing sensitive information in a Cloud Storage bucket. For legal reasons, you need to be able to record all requests that read any of the stored data. You want to make sure you comply with these requirements. What should you do?

- A. Enable the Identity Aware Proxy API on the project.
- B. Scan the bucker using the Data Loss Prevention API.
- C. Allow only a single Service Account access to read the data.
- D. Enable Data Access audit logs for the Cloud Storage API.

Answer: D

NEW QUESTION 110

You have an application that looks for its licensing server on the IP 10.0.3.21. You need to deploy the licensing server on Compute Engine. You do not want to change the configuration of the application and want the application to be able to reach the licensing server. What should you do?

- A. Reserve the IP 10.0.3.21 as a static internal IP address using gcloud and assign it to the licensing server.
- B. Reserve the IP 10.0.3.21 as a static public IP address using gcloud and assign it to the licensing server.
- C. Use the IP 10.0.3.21 as a custom ephemeral IP address and assign it to the licensing server.
- D. Start the licensing server with an automatic ephemeral IP address, and then promote it to a static internal IP address.

Answer: A

NEW QUESTION 112

You need to configure IAM access audit logging in BigQuery for external auditors. You want to follow Google-recommended practices. What should you do?

- A. Add the auditors group to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- B. Add the auditors group to two new custom IAM roles.
- C. Add the auditor user accounts to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- D. Add the auditor user accounts to two new custom IAM roles.

Answer: C

NEW QUESTION 116

You are assigned to maintain a Google Kubernetes Engine (GKE) cluster named dev that was deployed on Google Cloud. You want to manage the GKE configuration using the command line interface (CLI). You have just downloaded and installed the Cloud SDK. You want to ensure that future CLI commands by default address this specific cluster. What should you do?

- A. Use the command `gcloud config set container/cluster dev`
- B. Use the command `gcloud container clusters update dev`
- C. Create a file called `gk`
- D. default in the `~/gcloud` folder that contains the cluster name
- E. Create a file called `default`
- F. json in the `~/gcloud` folder that contains the cluster name

Answer: B

NEW QUESTION 121

You have a web application deployed as a managed instance group. You have a new version of the application to gradually deploy. Your web application is currently receiving live web traffic. You want to ensure that the available capacity does not decrease during the deployment. What should you do?

- A. Perform a rolling-action start-update with `maxSurge` set to 0 and `maxUnavailable` set to 1.
- B. Perform a rolling-action start-update with `maxSurge` set to 1 and `maxUnavailable` set to 0.
- C. Create a new managed instance group with an updated instance template
- D. Add the group to the backend service for the load balance
- E. When all instances in the new managed instance group are healthy, delete the old managed instance group.
- F. Create a new instance template with the new application version
- G. Update the existing managed instance group with the new instance template
- H. Delete the instances in the managed instance group to allow the managed instance group to recreate the instance using the new instance template.

Answer: B

NEW QUESTION 124

You want to configure an SSH connection to a single Compute Engine instance for users in the `dev1` group. This instance is the only resource in this particular Google Cloud Platform project that the `dev1` users should be able to connect to. What should you do?

- A. Set metadata to `enable-oslogin=true` for the instance
- B. Grant the `dev1` group the `compute.osLogin` role. Direct them to use the Cloud Shell to ssh to that instance.
- C. Set metadata to `enable-oslogin=true` for the instance
- D. Set the service account to no service account for that instance
- E. Direct them to use the Cloud Shell to ssh to that instance.
- F. Enable block project wide keys for the instance
- G. Generate an SSH key for each user in the `dev1` group. Distribute the keys to `dev1` users and direct them to use their third-party tools to connect.
- H. Enable block project wide keys for the instance
- I. Generate an SSH key and associate the key with that instance
- J. Distribute the key to `dev1` users and direct them to use their third-party tools to connect.

Answer: D

NEW QUESTION 128

You have an application that uses Cloud Spanner as a database backend to keep current state information about users. Cloud Bigtable logs all events triggered by users. You export Cloud Spanner data to Cloud Storage during daily backups. One of your analysts asks you to join data from Cloud Spanner and Cloud Bigtable for specific users. You want to complete this ad hoc request as efficiently as possible. What should you do?

- A. Create a dataflow job that copies data from Cloud Bigtable and Cloud Storage for specific users.
- B. Create a dataflow job that copies data from Cloud Bigtable and Cloud Spanner for specific users.
- C. Create a Cloud Dataproc cluster that runs a Spark job to extract data from Cloud Bigtable and Cloud Storage for specific users.
- D. Create two separate BigQuery external tables on Cloud Storage and Cloud Bigtable
- E. Use the BigQuery console to join these tables through user fields, and apply appropriate filters.

Answer: D

NEW QUESTION 130

&. You are working for a hospital that stores its medical images in an on-premises data room. The hospital wants to use Cloud Storage for archival storage of these images. The hospital wants an automated process to upload any new medical images to Cloud Storage. You need to design and implement a solution. What should you do?

- A. Deploy a Dataflow job from the batch template "Datastore to Cloud Storage" Schedule the batch job on the desired interval
- B. In the Cloud Console, go to Cloud Storage Upload the relevant images to the appropriate bucket
- C. Create a script that uses the `gsutil` command line interface to synchronize the on-premises storage with Cloud Storage Schedule the script as a cron job
- D. Create a Pub/Sub topic, and enable a Cloud Storage trigger for the Pub/Sub topic
- E. Create an application that sends all medical images to the Pub/Sub topic

Answer: A

NEW QUESTION 133

You created an instance of SQL Server 2017 on Compute Engine to test features in the new version. You want to connect to this instance using the fewest number of steps. What should you do?

- A. Install a RDP client on your desktop
- B. Verify that a firewall rule for port 3389 exists.

- C. Install a RDP client in your deskto
- D. Set a Windows username and password in the GCP Consol
- E. Use the credentials to log in to the instance.
- F. Set a Windows password in the GCP Consol
- G. Verify that a firewall rule for port 22 exist
- H. Click theRDP button in the GCP Console and supply the credentials to log in.
- I. Set a Windows username and password in the GCP Consol
- J. Verify that a firewall rule for port 3389 exist
- K. Click the RDP button in the GCP Console, and supply the credentials to log in.

Answer: B

NEW QUESTION 134

You are operating a Google Kubernetes Engine (GKE) cluster for your company where different teams can run non-production workloads. Your Machine Learning (ML) team needs access to Nvidia Tesla P100 GPUs to train their models. You want to minimize effort and cost. What should you do?

- A. Ask your ML team to add the "accelerator: gpu" annotation to their pod specification.
- B. Recreate all the nodes of the GKE cluster to enable GPUs on all of them.
- C. Create your own Kubernetes cluster on top of Compute Engine with nodes that have GPU
- D. Dedicate this cluster to your ML team.
- E. Add a new, GPU-enabled, node pool to the GKE cluste
- F. Ask your ML team to add the cloud.google.com/gke -accelerator: nvidia-tesla-p100 nodeSelector to their pod specification.

Answer: B

NEW QUESTION 135

Your organization has user identities in Active Directory. Your organization wants to use Active Directory as their source of truth for identities. Your organization wants to have full control over the Google accounts used by employees for all Google services, including your Google Cloud Platform (GCP) organization. What should you do?

- A. Use Google Cloud Directory Sync (GCDS) to synchronize users into Cloud Identity.
- B. Use the cloud Identity APIs and write a script to synchronize users to Cloud Identity.
- C. Export users from Active Directory as a CSV and import them to Cloud Identity via the Admin Console.
- D. Ask each employee to create a Google account using self signu
- E. Require that each employee use their company email address and password.

Answer: A

NEW QUESTION 137

You have downloaded and installed the gcloud command line interface (CLI) and have authenticated with your Google Account. Most of your Compute Engine instances in your project run in the europe-west1-d zone. You want to avoid having to specify this zone with each CLI command when managing these instances. What should you do?

- A. Set the europe-west1-d zone as the default zone using the gcloud config subcommand.
- B. In the Settings page for Compute Engine under Default location, set the zone to europe-west1-d.
- C. In the CLI installation directory, create a file called default.conf containing zone=europe-west1-d.
- D. Create a Metadata entry on the Compute Engine page with key compute/zone and value europe-west1-d.

Answer: C

NEW QUESTION 139

You have a Dockerfile that you need to deploy on Kubernetes Engine. What should you do?

- A. Use kubectl app deploy <dockerfilename>.
- B. Use gcloud app deploy <dockerfilename>.
- C. Create a docker image from the Dockerfile and upload it to Container Registr
- D. Create a Deployment YAML file to point to that imag
- E. Use kubectl to create the deployment with that file.
- F. Create a docker image from the Dockerfile and upload it to Cloud Storang
- G. Create a Deployment YAML file to point to that imag
- H. Use kubectl to create the deployment with that file.

Answer: C

NEW QUESTION 140

Several employees at your company have been creating projects with Cloud Platform and paying for it with their personal credit cards, which the company reimburses. The company wants to centralize all these projects under a single, new billing account. What should you do?

- A. Contact cloud-billing@google.com with your bank account details and request a corporate billing account for your company.
- B. Create a ticket with Google Support and wait for their call to share your credit card details over the phone.
- C. In the Google Platform Console, go to the Resource Manage and move all projects to the root Organization.
- D. In the Google Cloud Platform Console, create a new billing account and set up a payment method.

Answer: D

NEW QUESTION 142

Your organization has strict requirements to control access to Google Cloud projects. You need to enable your Site Reliability Engineers (SREs) to approve


requests from the Google Cloud support team when an SRE opens a support case. You want to follow Google-recommended practices. What should you do?

- A. Add your SREs to roles/iam.roleAdmin role.
- B. Add your SREs to roles/accessapproval approver role.
- C. Add your SREs to a group and then add this group to roles/iam roleAdmin role.
- D. Add your SREs to a group and then add this group to roles/accessapproval approver role.

Answer: A

NEW QUESTION 144

You are building a pipeline to process time-series data. Which Google Cloud Platform services should you put in boxes 1,2,3, and 4?

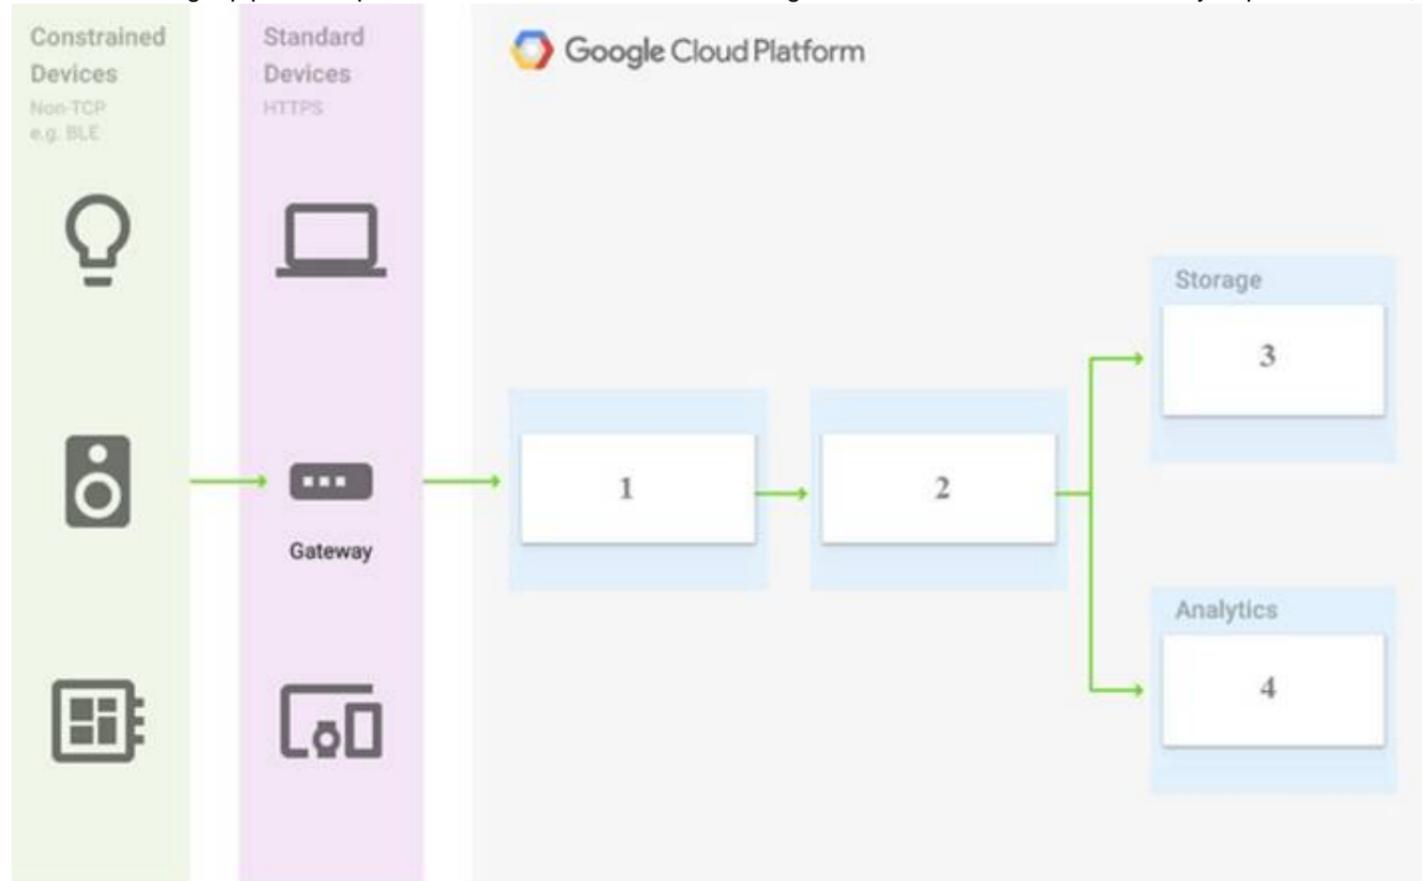

- A. Cloud Pub/Sub, Cloud Dataflow, Cloud Datastore, BigQuery
- B. Firebase Messages, Cloud Pub/Sub, Cloud Spanner, BigQuery
- C. Cloud Pub/Sub, Cloud Storage, BigQuery, Cloud Bigtable
- D. Cloud Pub/Sub, Cloud Dataflow, Cloud Bigtable, BigQuery

Answer: D

NEW QUESTION 145

You want to send and consume Cloud Pub/Sub messages from your App Engine application. The Cloud Pub/Sub API is currently disabled. You will use a service account to authenticate your application to the API. You want to make sure your application can use Cloud Pub/Sub. What should you do?

- A. Enable the Cloud Pub/Sub API in the API Library on the GCP Console.
- B. Rely on the automatic enablement of the Cloud Pub/Sub API when the Service Account accesses it.
- C. Use Deployment Manager to deploy your applicatio
- D. Rely on the automatic enablement of all APIs used by the application being deployed.
- E. Grant the App Engine Default service account the role of Cloud Pub/Sub Admi
- F. Have your application enable the API on the first connection to Cloud Pub/Sub.

Answer: A

NEW QUESTION 149

You need to create a custom IAM role for use with a GCP service. All permissions in the role must be suitable for production use. You also want to clearly share with your organization the status of the custom role. This will be the first version of the custom role. What should you do?

- A. Use permissions in your role that use the 'supported' support level for role permission
- B. Set the role stage to ALPHA while testing the role permissions.
- C. Use permissions in your role that use the 'supported' support level for role permission
- D. Set the role stage to BETA while testing the role permissions.
- E. Use permissions in your role that use the 'testing' support level for role permission
- F. Set the role stage to ALPHA while testing the role permissions.
- G. Use permissions in your role that use the 'testing' support level for role permission
- H. Set the role stage to BETA while testing the role permissions.

Answer: C

NEW QUESTION 153

You deployed a new application inside your Google Kubernetes Engine cluster using the YAML file specified below.

```

apiVersion: apps/v1          apiVersion: v1
kind: Deployment            kind: Service
metadata:                  metadata:
  name: myapp-deployment    name: myapp-service
spec:                      spec:
  selector:                ports:
    matchLabels:           - port: 8000
      app: myapp           targetPort: 80
  replicas: 2              protocol: TCP
  template:                selector:
    metadata:              app: myapp
    labels:
      app: myapp
    spec:
      containers:
        - name: myapp
          image: myapp:1.1
          ports:
            - containerPort: 80

```

You check the status of the deployed pods and notice that one of them is still in PENDING status:

```

kubectl get pods -l app=myapp
NAME                                READY   STATUS    RESTART  AGE
myapp-deployment-58ddb995-lp86m    0/1    Pending  0        9m
myapp-deployment-58ddb995-qjpkg    1/1    Running  0        9m

```

You want to find out why the pod is stuck in pending status. What should you do?

- A. Review details of the myapp-service Service object and check for error messages.
- B. Review details of the myapp-deployment Deployment object and check for error messages.
- C. Review details of myapp-deployment-58ddb995-lp86m Pod and check for warning messages.
- D. View logs of the container in myapp-deployment-58ddb995-lp86m pod and check for warning messages.

Answer: C

NEW QUESTION 157

Your company implemented BigQuery as an enterprise data warehouse. Users from multiple business units run queries on this data warehouse. However, you notice that query costs for BigQuery are very high, and you need to control costs. Which two methods should you use? (Choose two.)

- A. Split the users from business units to multiple projects.
- B. Apply a user- or project-level custom query quota for BigQuery data warehouse.
- C. Create separate copies of your BigQuery data warehouse for each business unit.
- D. Split your BigQuery data warehouse into multiple data warehouses for each business unit.
- E. Change your BigQuery query model from on-demand to flat rat
- F. Apply the appropriate number of slots to each Project.

Answer: BE

NEW QUESTION 161

You need to create a Compute Engine instance in a new project that doesn't exist yet. What should you do?

- A. Using the Cloud SDK, create a new project, enable the Compute Engine API in that project, and then create the instance specifying your new project.
- B. Enable the Compute Engine API in the Cloud Console, use the Cloud SDK to create the instance, and then use the `--project` flag to specify a new project.
- C. Using the Cloud SDK, create the new instance, and use the `--project` flag to specify the new project. Answer yes when prompted by Cloud SDK to enable the Compute Engine API.
- D. Enable the Compute Engine API in the Cloud Consol
- E. Go to the Compute Engine section of the Console to create a new instance, and look for the Create In A New Project option in the creation form.

Answer: A

NEW QUESTION 166

Your company has a large quantity of unstructured data in different file formats. You want to perform ETL transformations on the data. You need to make the data accessible on Google Cloud so it can be processed by a Dataflow job. What should you do?

- A. Upload the data to BigQuery using the bq command line tool.
- B. Upload the data to Cloud Storage using the gsutil command line tool.
- C. Upload the data into Cloud SQL using the import function in the console.
- D. Upload the data into Cloud Spanner using the import function in the console.

Answer: A

NEW QUESTION 171

You need to create an autoscaling managed instance group for an HTTPS web application. You want to make sure that unhealthy VMs are recreated. What should you do?

- A. Create a health check on port 443 and use that when creating the Managed Instance Group.
- B. Select Multi-Zone instead of Single-Zone when creating the Managed Instance Group.
- C. In the Instance Template, add the label 'health-check'.
- D. In the Instance Template, add a startup script that sends a heartbeat to the metadata server.

Answer: C

NEW QUESTION 173

You are working with a Cloud SQL MySQL database at your company. You need to retain a month-end copy of the database for three years for audit purposes. What should you do?

- A. Save file automatic first-of-the- month backup for three years Store the backup file in an Archive class Cloud Storage bucket
- B. Convert the automatic first-of-the-month backup to an export file Write the export file to a Coldlineclass Cloud Storage bucket
- C. Set up an export job for the first of the month Write the export file to an Archive class Cloud Storage bucket
- D. Set up an on-demand backup for the first of the month Write the backup to an Archive class Cloud Storage bucket

Answer: A

NEW QUESTION 177

You are creating a Google Kubernetes Engine (GKE) cluster with a cluster autoscaler feature enabled. You need to make sure that each node of the cluster will run a monitoring pod that sends container metrics to a third-party monitoring solution. What should you do?

- A. Deploy the monitoring pod in a StatefulSet object.
- B. Deploy the monitoring pod in a DaemonSet object.
- C. Reference the monitoring pod in a Deployment object.
- D. Reference the monitoring pod in a cluster initializer at the GKE cluster creation time.

Answer: B

NEW QUESTION 182

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your Associate-Cloud-Engineer Exam with Our Prep Materials Via below:

<https://www.certleader.com/Associate-Cloud-Engineer-dumps.html>